



DC POWER CONNECTORS: KLDHCX Series
High Current PCB Mount DC Power Jack

Product Features

- 2.0mm and 2.5mm
- Built-In DC On/Off Switch
- Laptop and Palm Computers, Portable Modems, Radar Detectors, and Other Portable Device Applications
- CSA/NRTL Certified File No. LR78160

Performance Specifications

Materials and Finish

Body: PBT, UL94V-0 Rated, Black Color

Center Pin: Brass, Nickel Plated

Contact #1: Brass Tin Plated

Contact #2: Phosphor Bronze Tin Plated

Contact #3: Brass, Tin Plated

Electrical Characteristics

Rated Current: 5A

Rated Voltage: 24V RMS

Insulation Resistance: 50 Megohms Min. at 100 or 200V DC for 1 Minute

Contact Resistance: 30 milliohms Max.

Dielectric Withstanding Voltage: 250V AC Min. for 1 Minute

Mechanical Characteristics

Durability Test: 5000 Cycles

Insertion Force: 0.3kg - 2.5kg

Extraction Force: 0.3kg - 2.5kg

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

Part Number Builder

-
 Series Diameter

Series

KLDHCX-0202 - High Current PCB Mount DC Power Jack

Diameter



- A - 2.0mm Center Pin Diameter
- B - 2.5mm Center Pin Diameter

Contact Kycon For Other Option

KLDHCX-0202 Series

Dimensions in mm

KLDHCX-0202-x

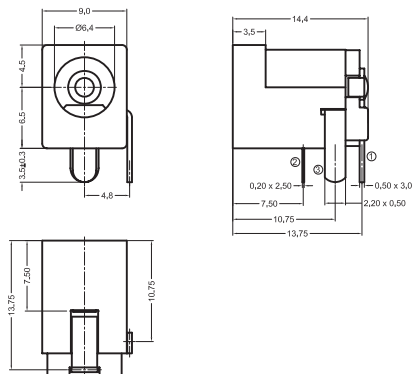

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kycon:](#)

[KLDHCX-0202-AC](#) [KLDHCX-0202-BC](#)