


Socket Configuration ( KMDA Series )

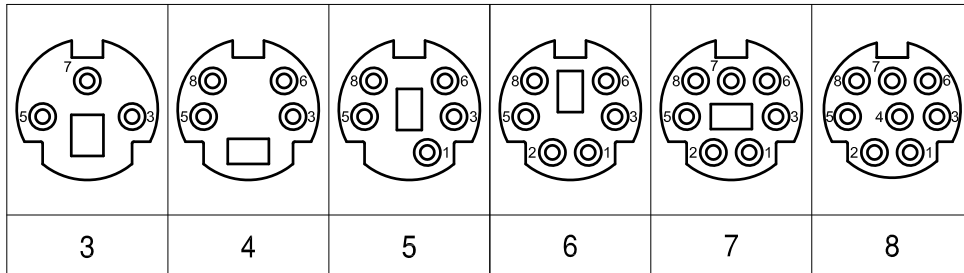


**RoHS COMPLIANT**

Tolerances
X.X $\pm$ 0.25
X.XX $\pm$ 0.15
Unless Stated
Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	12/15/06	New Drawing	R. Aguirre	H. MA	R. Aguirre	12/13/06
A2	04/11/18	Update Address & RoHS Logo	J. Elbanna	C. Furumasu		
A3	02/14/19	ECO #19-014	G. Serrato	D. Shehan		
A4	06/08/20	ECO #20-022	G. Serrato	D. Shehan		

**KMDAX-xS**



UNITS  
mm

Assembly Type Female Cablemount

Mini din socket, RoHS Compliant

