

	<b>E480232</b>
---	----------------

**Features**

- Glass Passivated Junction and Excellent Clamping Capability
- Low Incremental Surge Resistance
- Excellent Clamping Capability
- Halogen Free Available Upon Request By Adding Suffix "-HF"
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant ("P" Suffix Designates RoHS Compliant. See Ordering Information)

**Mechanical Data**

- Weight: 0.045 ounce, 1.2 grams

**Maximum Ratings**

- For Parts Without A , the  $V_{BR}$  is  $\pm 20\%$
- Operating Junction Temperature Range:  $-55^{\circ}\text{C}$  to  $+175^{\circ}\text{C}$
- Storage Temperature Range:  $-55^{\circ}\text{C}$  to  $+175^{\circ}\text{C}$


Peak Power Pulse Surger Current	$I_{PPM}$	See theTable	
Peak Pulse Power Dissipation with 10/1000us waveform	$P_{PPM}$	1500W	$T_A=25^{\circ}\text{C}$
Steady State Power Dissipatoin	$P_{M(AV)}$	5.0 W	$T_L=75^{\circ}\text{C}$

1.High Temperature Solder Exemption Applied, see EU Directive Annex 7a.

**Device Marking:**


Unidirectional - Type Number and Cathode Band

Pin Configuration



**1500Watts  
Low Capacitance  
TVS  
6.5 to 28 Volts**

DO-201AE

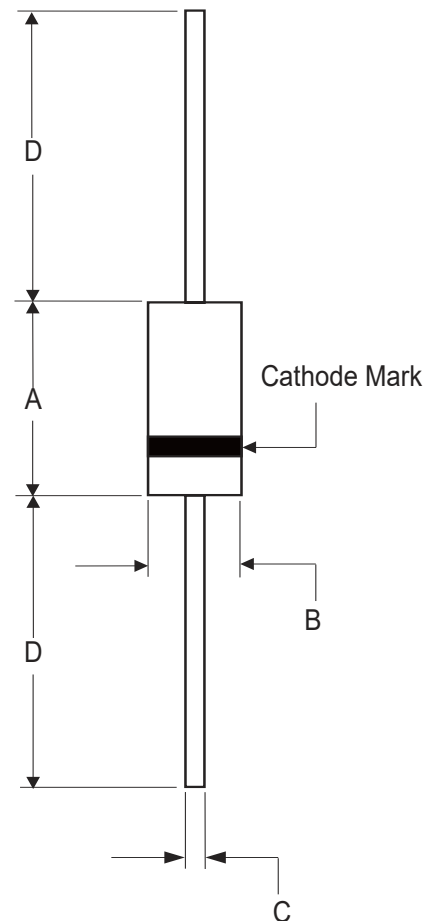

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	----	0.370	----	9.50	
B	----	0.209	----	5.30	
C	0.038	0.042	0.96	1.06	
D	1.000	----	25.40	----	

MCC PART NUMBER	STAND-OFF VOLTAGE VWM (VOLTS)	BREAKDOWN VOLTAGE V(BR) (VOLTS) MIN-MAX	TEST CURRENT AT $I_T$ (mA)	MAXIMUM REVERSE LEAKAGE AT $V_{WM}$ $I_R$ ( $\mu$ A)	MAXIMUM CLAMPING VOLTAGE AT $I_{pp}$ $V_c$ (VOLTS)	MAXIMUM PEAK PULSE CURRENT FIG.3 $I_{PPM}$ (AMPS)	MAXIMUM JUNCTION CAPACITANCE AT 0 VOLTS (pF)	WORKING INVERSE BLOCKING VOLTAGE $V_{WIB}$ (VOLTS)	WORKING INVERSE BLOCKING VOLTAGE $V_{WIB}$ (VOLTS)	PEAK INVERSE BLOCKING VOLTAGE $V_{PIB}$ (VOLTS)
UNI-POLAR										
LCE6.5A	6.5	7.22-7.98	10	1000	11.2	100	100	75	1.0	100
LCE7.0A	7.0	7.78-8.60	10	500	12.0	100	100	75	1.0	100
LCE7.5A	7.5	8.33-9.21	10	250	12.9	100	100	75	1.0	100
LCE8.0A	8.0	8.89-9.83	1	100	13.6	100	100	75	1.0	100
LCE8.5A	8.5	9.44-10.40	1	50	14.4	100	100	75	1.0	100
LCE9.0A	9.0	10.00-11.10	1	10	15.4	97	100	75	1.0	100
LCE10A	10.0	11.10-12.30	1	5	17.0	88	100	75	1.0	100
LCE11A	11.0	12.20-13.50	1	5	18.2	82	100	75	1.0	100
LCE12A	12.0	13.30-14.70	1	5	19.9	75	100	75	1.0	100
LCE13A	13.0	14.40-15.90	1	5	21.5	70	100	75	1.0	100
LCE14A	14.0	15.60-17.20	1	5	23.2	65	100	75	1.0	100
LCE15A	15.0	16.70-18.50	1	5	24.4	61	100	75	1.0	100
LCE16A	16.0	17.80-19.70	1	5	26.0	57	100	75	1.0	100
LCE17A	17.0	18.90-20.90	1	5	27.6	54	100	75	1.0	100
LCE18A	18.0	20.00-22.10	1	5	29.2	51	100	75	1.0	100
LCE20A	20.0	22.20-24.50	1	5	32.4	46	100	75	1.0	100
LCE22A	22.0	24.40-26.90	1	5	35.5	42	100	75	1.0	100
LCE24A	24.0	26.70-29.50	1	5	38.9	39	100	75	1.0	100
LCE26A	26.0	28.90-31.90	1	5	42.1	36	100	75	1.0	100
LCE28A	28.0	31.10-34.40	1	5	45.5	33	100	75	1.0	100

### Curve Characteristics

Fig. 1 - Peak Pulse Power Rating Curve

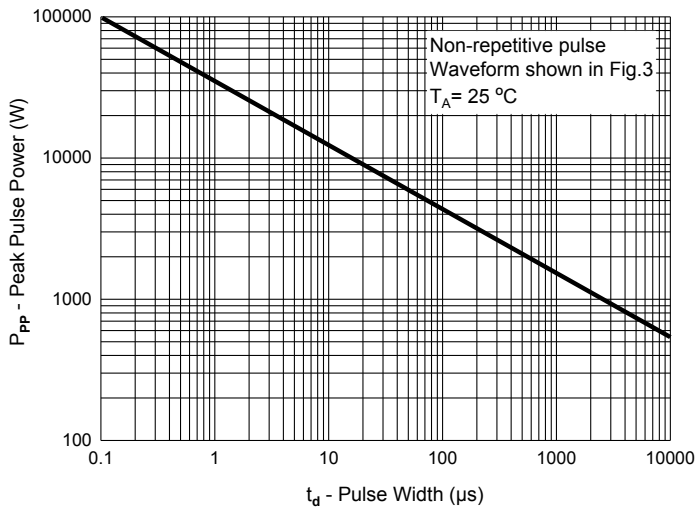


Fig. 2 - Typical Junction Capacitance

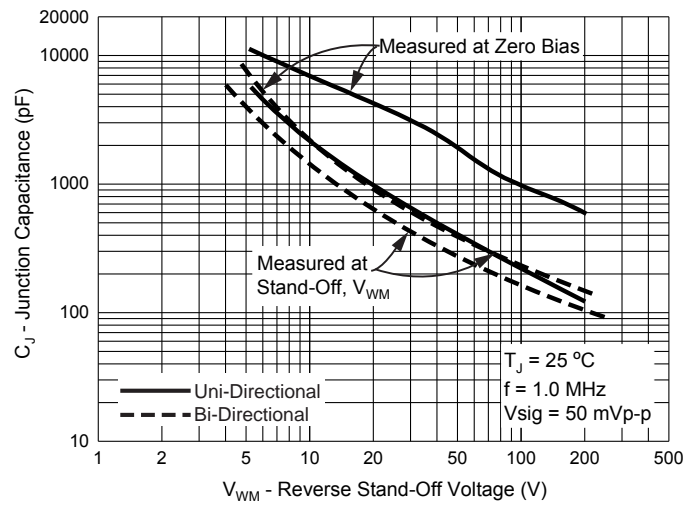


Fig. 3 - Pulse Waveform

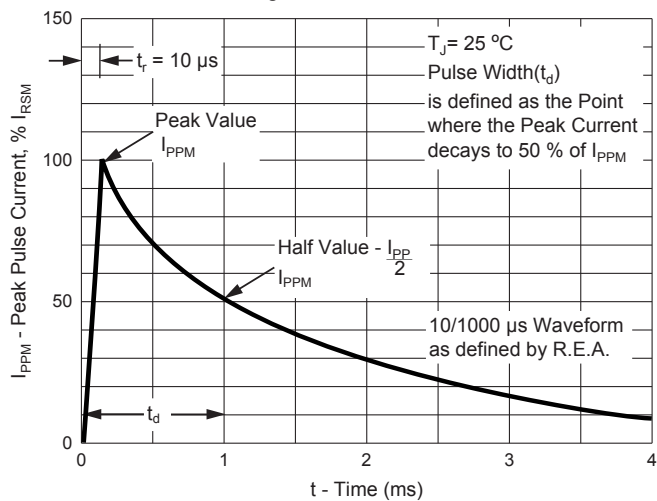


Fig. 4 - Pulse Derating Curve

