



Features

- High Efficiency (up to 91%)
- Wide Range Universal Input 90-305 VAC
- Active Power Factor Correction (0.99 typical)
- Constant Current Output
- Dimming Function
- Lightning Protection
- Waterproof (IP67)
- Overcurrent, Overvoltage, Overtemperature Protection
- Meets UL8750 & EN61347 Safety
- Compliant to ANSI/IEEE C62.41, Class A
- 3 Year Warranty



Description

The LE75S-CD Series are constant current mode LED Driver power supplies that operate from a wide range input of 90 to 305Vac. These models provide up to 2.8A of output current, at a maximum output voltage of 108Vdc, at up to 75W output power. The LE75S-CD series are highly efficient and highly reliable. Features include dimming control, overvoltage protection, short circuit protection, and overtemperature protection.

Model Selection

Model Number	Output Current	Output Voltage	Efficiency*		Ripple & Noise**	Regulation		Overvoltage Trip Level
			110Vac	220Vac		Line	Load	
LE75S28CD	2660mA-2940mA	13V – 27V	85%-87%	87%-89%	5% of Vo pk-pk	±1%	±3%	35V – 38V
LE75S140CD	1330mA-1470mA	27V – 54V	86%-88%	88%-90%	5% of Vo pk-pk	±1%	±3%	65V – 70V
LE75S70CD	665mA-735mA	54V – 108V	87%-89%	89%-91%	5% of Vo pk-pk	±1%	±3%	118V – 130V

- Notes:
1. Efficiency measured at full load, at input voltage noted. Efficiency will be 2% lower if measured immediately after start-up.
 2. Measured at 20MHz bandwidth, with noise probe directly across output terminals, and load terminated with 0.1µF ceramic and 10µF low ESR electrolytic capacitors.
 3. LE75S070CD: Non-Class 2 output (USR & CNR)
 4. LE75S140CD: Class 2 output (USR), Non-Class 2 output (CNR)
 5. LE75S280CD: Class 2 output (USR & CNR)

General Specifications

AC Input	90-305Vac, 47-63Hz, 1Ø 120–370Vdc	Turn On Time	110Vac: 0.8s – 1.2s 220Vac: 0.4s – 0.6s
Input Current	100Vac: 0.9A, 220Vac: 0.42A	Dimming Function	1-10Vdc source or External Resistor can be used for dimming control. See below.
Inrush Current	230Vac, cold start: will not exceed 50A		



General Specifications (continued)

Input Fuses	XA, 250VAC fuses provided on all models	Overload Protection	Constant Current
Earth Leakage Current	<1mA@277Vac, 50Hz	Short Circuit Protection	Provided - no damage to unit, self-recovery.
Efficiency	See Models chart.	Overvoltage Protection	Latch mode. AC input will need to be reset to return to normal operation after an OVP condition. See chart for trip range.
Output Power	75W continuous	Overtemperature Protection	Latch mode. AC input will need to be reset to return to normal operation after an OTP condition. Trip Temperature = 110°C typical.
Ripple and Noise	See chart	Operating Temperature	Operating: -35°C to +70°C Non-operating: -40°C to +85°C
Output Voltage	See chart	Relative Humidity	10% to 95% operating 5% to 100%, non-operating
Total Regulation	+/- 3%. See chart	Safety Standards	UL8750, UL935, UL1012, UL1310 Class 2; CSA-C22.2 No. 107.1, CSA C22.2 No. 223-M91 Class 2; EN61347-1, EN61347-2-13
Dimensions	W: 2.66" x L: 5.91" x H: 1.46"	MTBF	450,000 hours (2800mA model, at 110Vac input, 80% load, 25°C ambient, per MIL-HDBK-217F).
Weight	750g	Lifetime	65,000 hours (2800mA model, at 110Vac input, 80% load, 45°C ambient temperature.


EMI/EMC Compliance

Emissions	EN55015, Radiated & Conducted with 6db of margin
EMI for Lighting Equipment	EN61547
Static Discharge Immunity	EN61000-4-2, 4kV Contact Discharge, 8kV air discharge
Radiated RF Immunity	EN61000-4-3
EFT/Burst Immunity	EN61000-4-4
Line Surge Immunity	EN61000-4-5, 2kV line-line, 4kV line-earth
Conducted RF Immunity	EN61000-4-6
Power Frequency Magnetic Field Immunity	EN61000-4-8
Voltage Dip Immunity	EN61000-4-11
Line Harmonic Emissions	EN61000-3-2
Flicker Test	EN61000-3-3
Transient Protection	ANSI/IEEE C62.41-1991: Class A operation. Line transient of 7 strikes of a 100kHz ring wave, 2.5kV level, common and differential mode.

Derating Curves

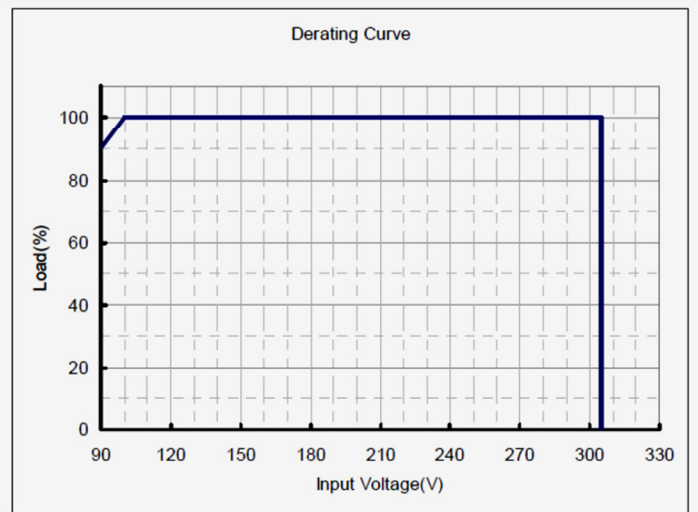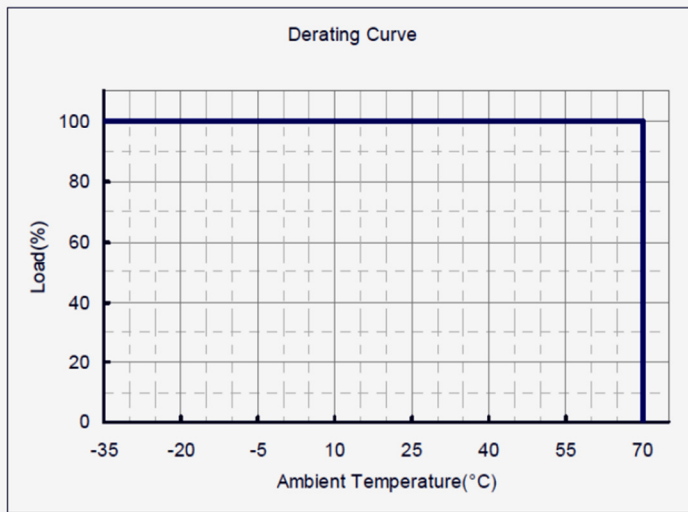

Mechanical Drawing

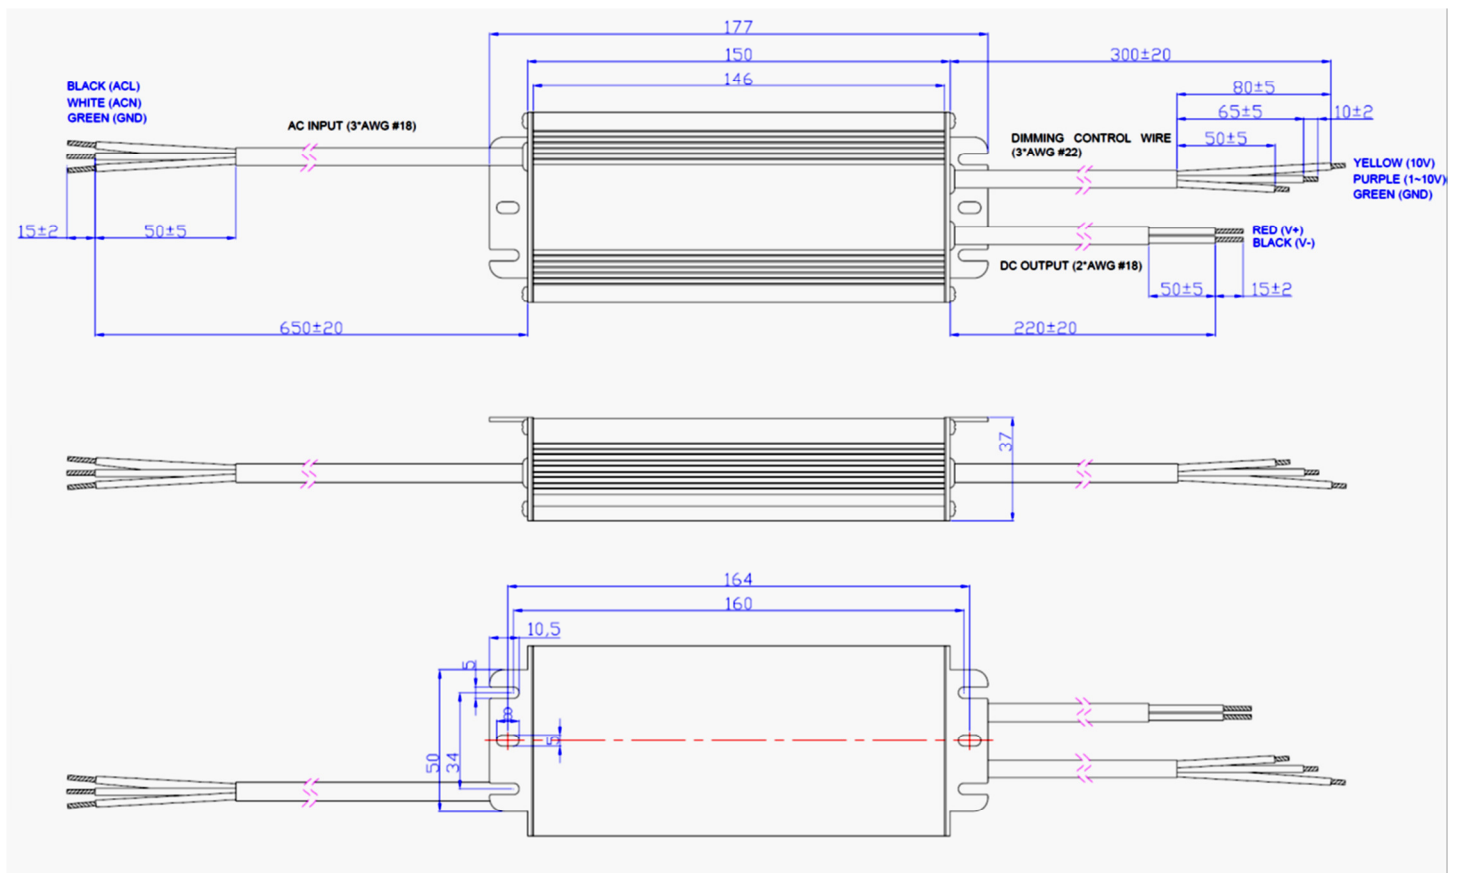

Dimming Control