



Cable assembly
RPC-1.85 plug – RTK 092-70 – RPC-1.85 jack -Armour

LU5-503-XXX

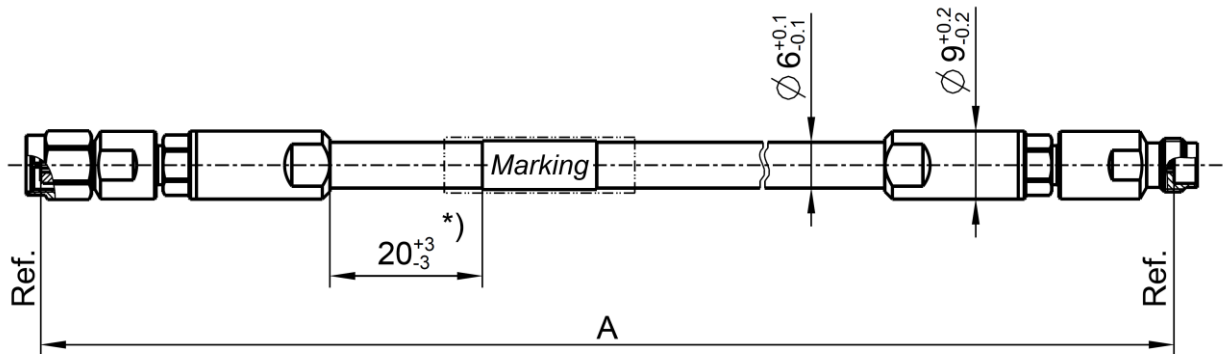

All dimensions are in mm; tolerances: ± 3 mm for $A \leq 300$ mm; $\pm 1\%$ for $A > 300$ mm
*) If length "A" < 150 mm marking is mount centric ± 5 mm

Available variants

| Type | Insertion loss at 70 GHz | Marking | Weight (g) / pce |
|-------------|--------------------------------------|---|-----------------------------|
| LU5-503-XXX | ≤ 0.00639 dB/mm * A mm + 0.9 dB | ROSENBERGER ssss LU5-503-XXX FAC-RRRRRRR  | 0.076 g/mm * A mm + 24.4. g |

XXX – length in mm = A
ssss – serial no. FAC – Factory Code RRRRRRR – lot no. Barcode = includes factory code, lot no. and serial no.

Note: max. Insertion Loss:
First constant = Cable attenuation in dB/mm; Second Constant = Connector left and Connector right +needed Adaptor

Weight:
First constant = Cable- and Armour- weight per mm; Second Constant = Connector left and Connector right weight per pce

Assembly parts

| | | |
|-----------------|-----------------|---------------|
| Connector left | RPC-1.85 plug | 08S129-2U5S3 |
| Connector right | RPC-1.85 jack | 08K129-2U5S3 |
| Cable | RTK 092-70 | |
| Armour | T3 Armour | |
| Clamping sleeve | Stainless steel | 08S129-2U5/43 |
| Tension sleeve | Stainless steel | 08S129-2U5/44 |

Electrical data

| | |
|-----------------------------|------------------------------|
| Impedance | 50 Ω |
| Frequency | DC to 70 GHz |
| Return loss ¹ | ≥ 14 dB, DC to 70 GHz |
| Insertion loss ¹ | see table available variants |

Individual testing and documentation:
Measurement plot with all 4 S-Parameters (S11; S22; S21; S12) and the care and handling instruction are included with the cable assembly. Measurement adaptors used are mentioned in the commentary field.

¹ Return Loss and Insertion Loss includes the measurement adaptor

öffentlich | public

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF_35/09.14/6.2

Technical Data Sheet

Rosenberger

Cable assembly
RPC-1.85 plug – RTK 092-70 – RPC-1.85 jack -Armour

LU5-503-XXX

Mechanical data

Minimum bend radius:
Multiple 32 mm

Environmental data

Temperature range -40°C to +85°C
RoHS compliant

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

öffentlich | public

| Draft | Date | Approved | Date | Rev. | Engineering change number | Name | Date |
|--------------|----------|-------------|----------|------|---------------------------|-----------|----------|
| Martin Moder | 20.05.19 | H. Babinger | 10.11.22 | a00 | 22-s230 | S. Schmid | 09.11.22 |

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel. : +49 8684 18-0
Email : info@rosenberger.de

Page

2 / 2

RF_35/09_14/6.2