

M Supercapacitors

Cylindrical cells



Features

- 2.5 Volts
- Low ESR
- High capacitance long cycle life
- Low ESR with high energy density
- Low leakage current
- UL recognized

Applications

- Pulse Power
- Bridge or hold-up power

Description

Eaton supercapacitors are unique, ultra-high capacitance devices utilizing electrochemical double layer capacitor (EDLC) construction combined with new, high performance materials. This combination of advanced technologies allows Eaton to offer a wide variety of capacitor solutions tailored to specific applications that range from a few micro-amps for several days to several amps for milliseconds.

Ratings

| | |
|-----------------------------|--|
| Capacitance | 1.0 F to 9.0 F |
| Maximum working voltage | 2.5 V |
| Surge voltage | 3.0 V |
| Capacitance tolerance | -20% to +80% (+20 °C) |
| Operating temperature range | -40 °C to +60 °C |
| Extended temperature range | -40 °C to +85 °C (Maximum working voltage 2.0 V) |

Specifications


| Capacitance (F) | Part Number | Nominal ESR (Ω) (Equivalent Series Resistance) Measured @ 1 kHz | | Nominal dimensions (mm) (diameter x length) | | Typical Mass (grams/piece) |
|-----------------|----------------|--|-------|--|------|-------------------------------|
| | | 100 Hz | 1 kHz | 8 | 13 | |
| 1 | M0810-2R5105-R | 0.210 | 0.250 | 8 | 13 | 1.2 |
| 2 | M0820-2R5205-R | 0.075 | 0.100 | 8 | 20 | 1.5 |
| 3 | M1020-2R5305-R | 0.035 | 0.050 | 10 | 20.5 | 2.8 |
| 6 | M1030-2R5605-R | 0.025 | 0.035 | 10 | 30 | 3.9 |
| 9 | M1325-2R5905-R | 0.020 | 0.030 | 13 | 26 | 5.6 |

Performance

| Parameter | Capacitance change (% of initial value) | ESR (% of max. initial value) |
|---|--|----------------------------------|
| Life (1000 hours @ +60 °C @ 2.5 Vdc) | ≤ 30% | ≤ 200% |
| Storage - Low and High Temperature (1000 hours @ -40 °C and +60 °C) | ≤ 30% | ≤ 200% |

Dimensions (mm)

| Part Number | D | D' | L | L' | F | d' | C | C' |
|-------------------|----------------|------|------|------|-------------|--------------|----------------|-----|
| M0810-2R5105-R | 8.0 | 8.5 | 13.0 | 13.5 | 3.5 | 0.50 | 20.0 | 5.0 |
| M0820-2R5205-R | 8.0 | 8.5 | 20.5 | 21.0 | 3.5 | 0.50 | 20.0 | 5.0 |
| M1020-2R5305-R | 10.0 | 10.5 | 21.8 | 22.3 | 5.0 | 0.60 | 20.0 | 5.0 |
| M1030-2R5605-R | 10.0 | 10.5 | 31.0 | 31.5 | 5.0 | 0.60 | 20.0 | 5.0 |
| M1325-2R5905-R | 13.0 | 13.5 | 27.9 | 28.4 | 5.0 | 0.60 | 20.0 | 5.0 |
| Tolerances | Maximum | | | | ±0.5 | ±0.02 | Minimum | |

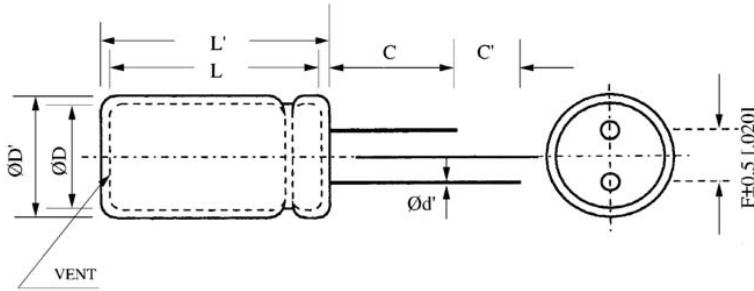

Part marking

- Manufacturer
- Capacitance (F)
- Nominal working voltage (V)
- Family code (or part number)
- Polarity

Part numbering system

| M | 1325 | — | 2R5 | 90 | 5 | -R |
|-------------|---------------------|-------------|-------------------------|------------------|------------|------------------|
| Family Code | Size reference (mm) | | Voltage (V) R = Decimal | Capacitance (µF) | | |
| M Family | Diameter = 13 | Length = 25 | 2R5 = 2.5 V | Value | Multiplier | Standard product |

Packaging information

- Standard packaging: Bulk, 100 units per bag
- Larger bulk packages available on request