


Part #: 100-00146-01

# **Description**

The M1575HCT-GN is a high performance antenna designed for the GPS band. The antenna is built on proprietary Maxtena Helicore® technology. This technology provides exceptional pattern control, polarization purity and high efficiency in a very compact form factor. The M1575HCT-GN is rated IP-67 when mounted for added protection. This product is designed for applications requiring high quality GPS reception.

### **Electrical Specifications**

Parameter	Specification
Frequency	1575 MHz (GPS)
Polarization	RHCP
Antenna Element Peak Gain	1.8 dBic (GPS)
Axial Ratio	0.2 dB (typical)
VSWR	1.5 (max)
Impedance	50 Ω
Operating temp.	from -30°C to 60°C
RF Connector	SMA male
Overall dimensions	135 mm (height) x 18.5 mm (diameter)
Weight	45 grams



## **Mechanical Specifications**

dimensions are in mm

#### **Features**


- · Very low axial ratio
- IP-67 mounted
- Ultra lightweight 45 grams
- Ground plane independent

### **Applications**


- · Vehicle and fleet tracking
- · Military & security
- Asset tracking
- · OII & gas industries
- · Navigation devices
- Mining equipment
- LBS & M2M applications
- · Handheld devices
- Law enforcement




### **GPS RHCP Gain-Elevation cut**

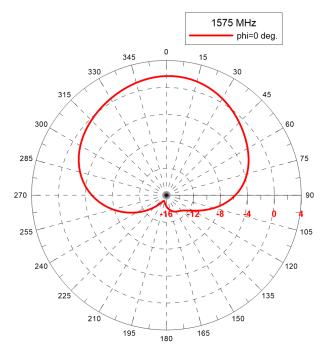

### **GPS Axial Ratio-Elevation cut**

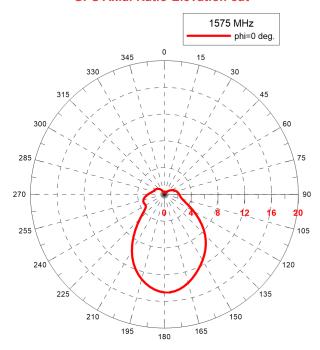

#### **GPS RHCP Gain-Azimuth cut**



#### **GPS Axial Ratio-Azimuth cut**

