


TNC straight and bulkhead jacks, receptacles, adapters, caps

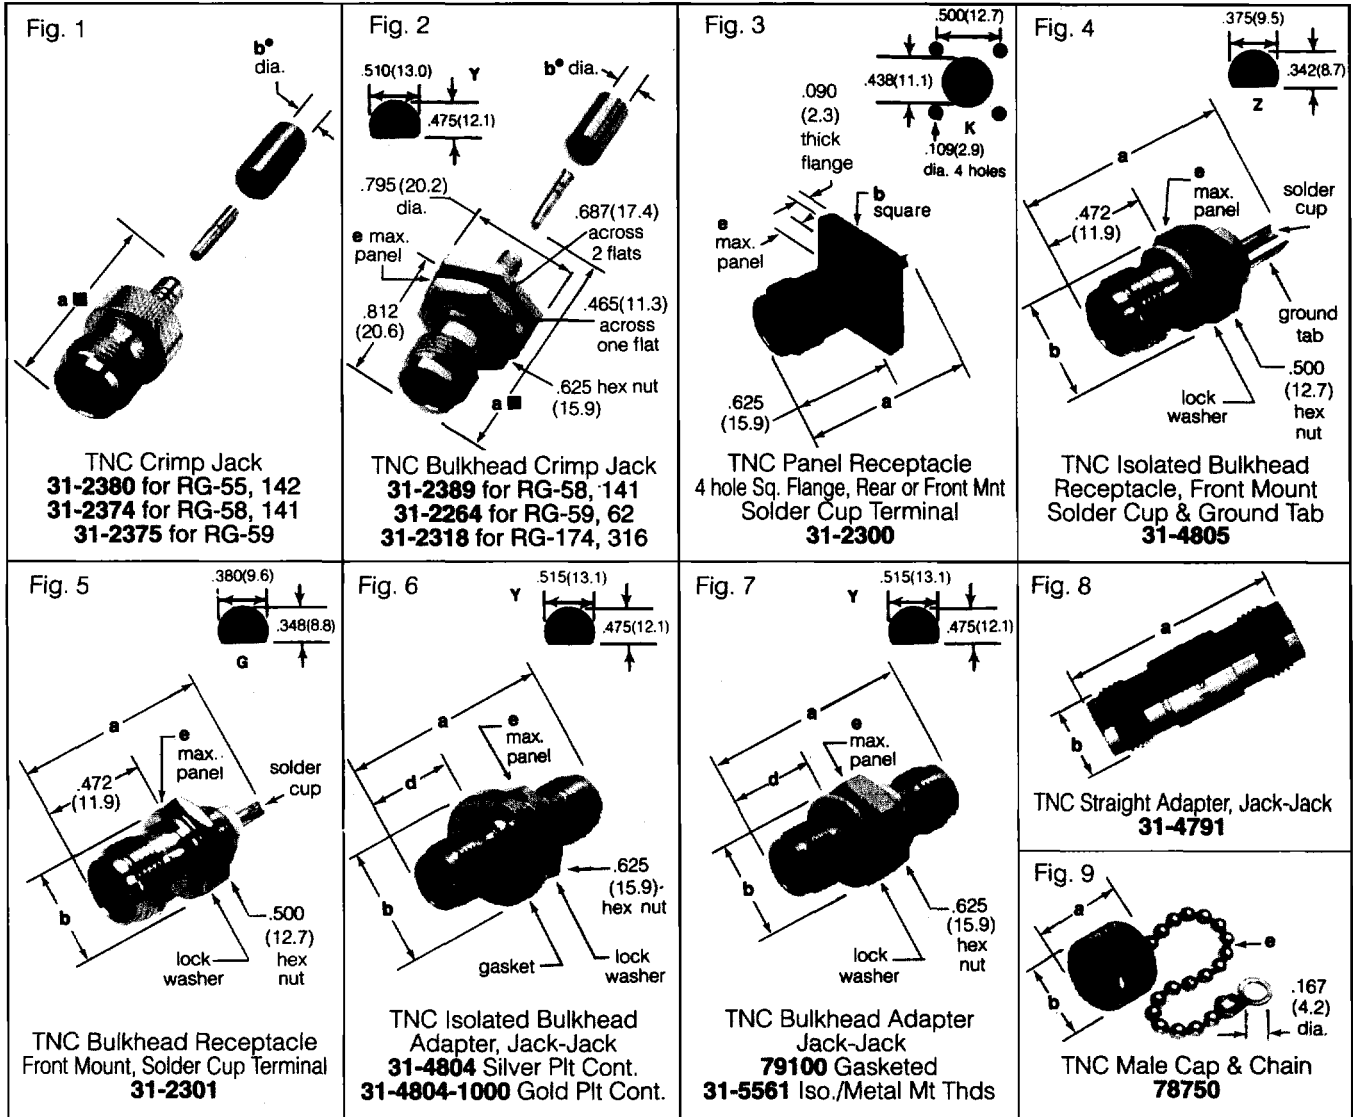

TNC PANEL & BULKHEAD RECEPTACLES, STRAIGHT & BULKHEAD ADAPTERS, CAPS

| Cable RG-U | Connector Type | Terminal Type | Dimensions, inches (millimeters) | | | CAI | Plt. | Ins. | MTG Hole | Military Number | Amphenol Number | Fig. |
|--|--------------------------|------------------------|----------------------------------|------------|-------------|-----|-----------|------|----------|--------------------------------------|-------------------------|------|
| | | | a | b | e | | | | | | | |
| 55, 142 | Jack, Crimp-Crimp | — | 1.17(29.7) | .220(5.6)* | — | C13 | P53 | D1 | — | M23329/4-08,4-10 | 31-2380 | 1 |
| 58,141 | Jack, Crimp-Crimp | — | 1.17(29.7) | .206(5.2)* | — | C13 | P53 | D1 | — | M23329/4-07,4-09 | 31-2374 | 1 |
| | Bulkh Jack, Crimp-Crimp | — | 1.41(35.7) | .206(5.2)* | .250(6.4) | C13 | P53 | D1 | Y | M23329/4-13,4-15 | 31-2389 | 2 |
| 59 | Jack, Crimp-Crimp | — | 1.18(30.0) | .261(6.6)* | — | C13 | P53 | D1 | — | M23329/4-11 | 31-2375 | 1 |
| 59, 62 | Bulkh Jack, Crimp, Crimp | — | 1.42(36.0) | .261(6.6)* | .250(6.4) | C13 | P6 | D1 | Y | M39012/28-0012 | 31-2264 | 2 |
| | Bulkh Jack, Crimp, Crimp | — | 1.41(35.7) | .120(3.0)* | .250(6.4) | C13 | P53 | D1 | Y | — | 31-2318 | 2 |
| Panel Receptacle 4 hole .687" (17.4mm) Square Flange No. 3-56 Tapped Flange Holes | | Solder Cup | 1.06(27.0) | .687(17.5) | .187(4.8)☆ | — | P2 | D1 | K | — | 31-2300 | 3 |
| Bulkhead Receptacle, Front Mount, Isolated From Panel, White Molded Thermoplastic Ins. | | Solder Cup, Ground Tab | 1.19(30.2) | .500(12.7) | .187(4.8) | — | P1 | D12 | Z | — | 31-4805 † | 4 |
| Bulkhead Receptacle, Front Mount | | Solder Cup | 1.06(27.0) | .500(12.7) | .118(2.9) | — | P2 | D1 | G | — | 31-2301 ▲ | 5 |
| Bulkhead Adapter, Jack-Jack Isolated from Panel, White Thermoplastic Ins. | | — | 1.28(32.5) | .625(15.9) | .190(4.8) | — | P1 P54 | D12 | Y | (Silver Plt Cont) (Gold Plt Cont) | 31-4804 31-4804-1000 | 6 |
| Bulkhead Adapter, Jack-Jack, Isolated from Panel, Metal Mt Thds, d dim. = .503(12.8) | | — | 1.33(33.8) | .625(15.9) | .187(4.8) | — | P6 | D1 | Y | — | 31-5561 | 7 |
| Bulkhead Adapter, Jack-Jack/Gasketed d dim. = .640(16.2) | | — | .141(35.7) | .750(19.0) | .171(4.3) | — | P1 | D11 | Y | (Wang 350-3055) | 79100 | 7 |
| Straight Adapter Jack-Jack | | — | 1.28(32.5) | .437(11.1) | — | — | P1 | D1 | — | (Wang 350-2076) | 31-4791 | 8 |
| Male Cap & Chain | | — | .375(9.5) | .562(14.3) | 4.00(101.6) | — | P3 | — | — | — | 78750 | 9 |

▲ If ground for a cable shield is needed inside the panel, use lug 31-759
If a ground wire to circuit inside the panel is needed, use lug 31-10152

† recommended torque value 12 lbf-in. max. * I.D. of crimp ferrule
■ To end of crimp ferrule ☆ max. panel when rear mounted thru panel