


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

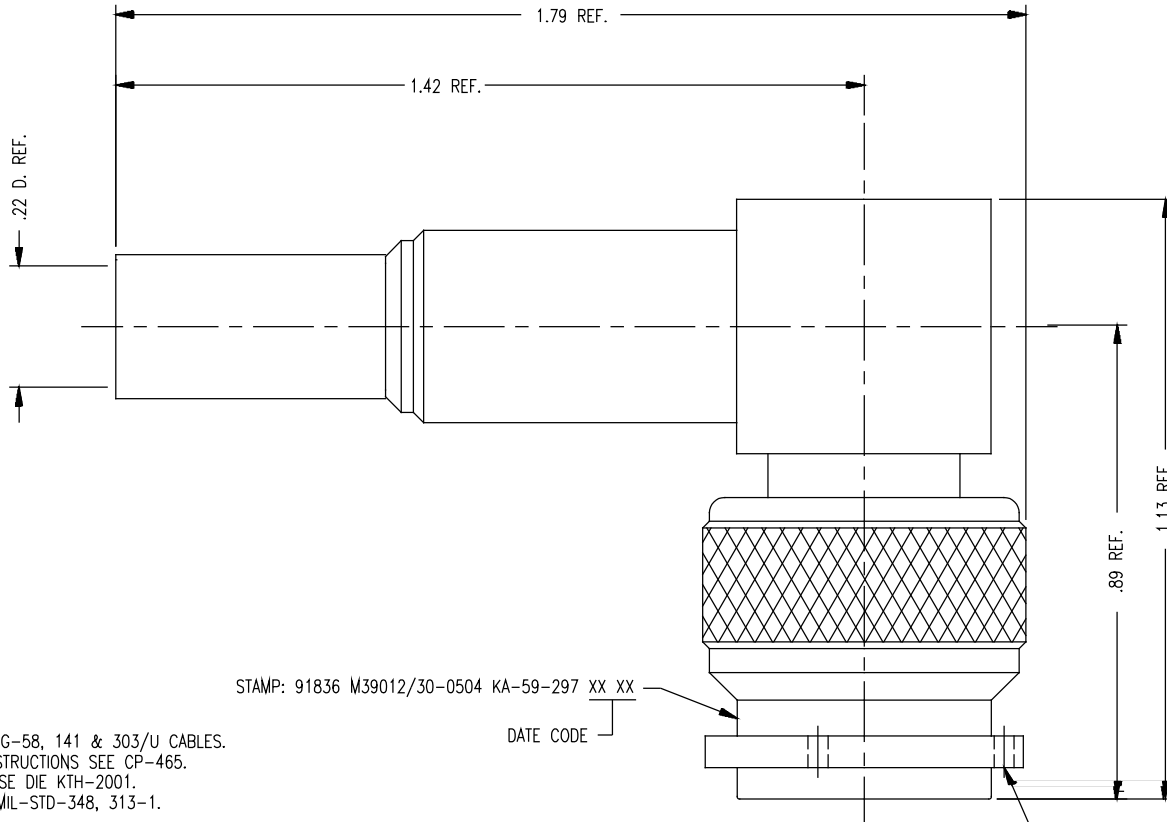

REVISIONS	
ISSUE	CHANGES
6	CN 34058 C REDRAWN JCA 09/02/92
7	CN 34481 C JCA 05/24/93
8	CN 38244 C BDH 03/12/01
L	ER064289 JI 09/29/16
M	ER064686 CY 12/21/16
N	ER066194 JI 03/22/17
Q	ECO-14367 LA 10/19/21
JCA3083	

M39012/30-0504

NOTES:

- FOR USE WITH RG-58, 141 & 303/U CABLES.
- FOR CABLING INSTRUCTIONS SEE CP-465.
- FOR CRIMPING USE DIE KTH-2001.
- INTERFACE PER MIL-STD-348, 313-1.
- MATERIALS:
 - INSULATORS: PTFE, ASTM-D-1710
 - GASKET: SIL. RUB., A-A-59588
 - K-GRIP SLEEVE: COM. BRONZE TUBE, ASTM B139
 - OUTER CONTACT } BER. COP., ASTM-B-196
 - CRIMP CONTACT }
 - C-RING: PHOS. BRONZE, ASTM-B-103
 - ALL OTHER PARTS: BRASS, ASTM-B16
- FINISHES:
 - CENTER CONTACTS: HARD GOLD PLT. PER ASTM B488
 - ALL OTHER METAL PARTS: SILVER PLT. PER ASTM B700
- ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - VOLTAGE RATING: 500 VRMS
 - FREQUENCY RANGE: DC TO 11 GHz

STAMP: 91836 M39012/30-0504 KA-59-297 XX XX

DATE CODE

.04 D. REF.
(3 HOLES)

THIS DRAWING, THE DESIGNS AND IDEAS EMBODIED IN THE DEVICE TO WHICH IT RELATES, AND THE METHOD OF PRODUCING THE DEVICE, ARE THE PROPERTY OF WINCHESTER ELECTRONICS CORPORATION AND SHALL NOT BE EMPLOYED, COPIED, OR DISCLOSED TO ANYONE, IN ANY MANNER WITHOUT THE CONSENT OF WINCHESTER ELECTRONICS CORPORATION.

SCALE	4:1		
APPROX SURFACE AREA	KA-59-297		
USED ON			
REF:			
PLUG, ANGLE, TNC			
DRAWN	JCA	DATE	09/03/92
DESIGN	LI	DATE	09/03/92
APPR.		DATE	



GSD

M39012/30-0504