


M39012/58-3006

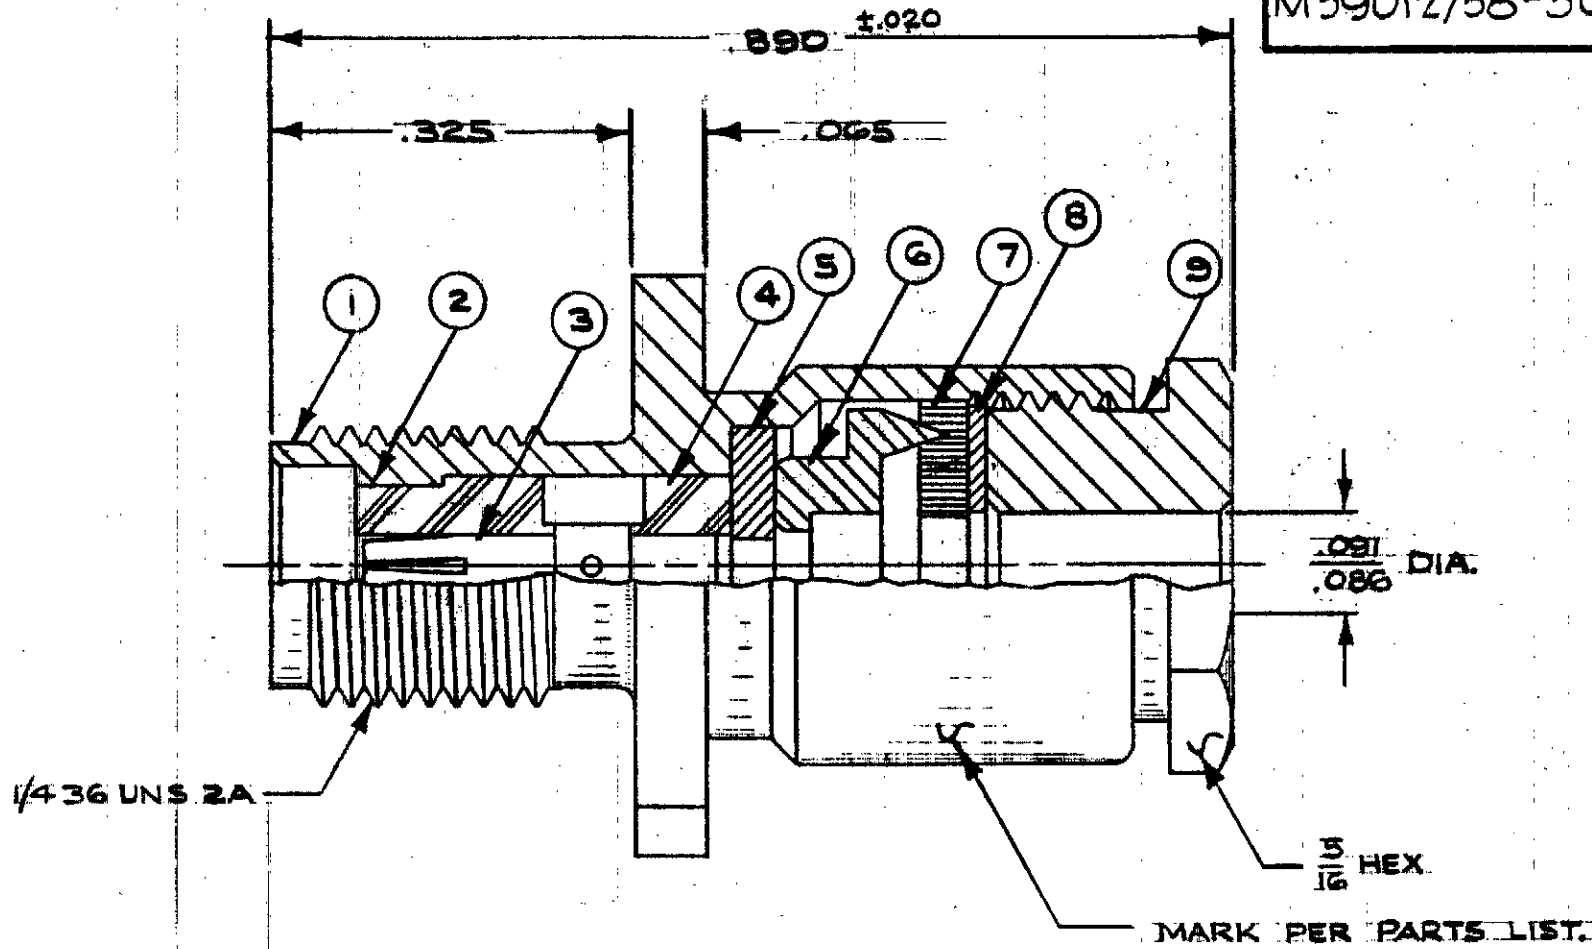

- NOTES:
- 1.) MATING END DIM'S PER MD-107.
 - 2.) PKG. PARTS 3 THRU 8 LOOSE WITH CONNECTOR.

DESIGN CONTROLLED 39012

SYM	DESCRIPTION	DATE	APPR.	UNLESS OTHERWISE SPECIFIED 1. REMOVE ALL BURRS 2. BREAK ALL CORNERS & EDGES .005 R MAX. 3. CHAMFER 1ST & LAST THREADS 45° 4. SURFACE ROUGHNESS 63 MIL-STD-10 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 6. ALL DIMENSIONS ARE AFTER PLATING	SOLITRON/MICROWAVE PORT SALERNO, FLORIDA	REF.
E	REL. DCNF-10262	2/86	D			MATERIAL
A	REV. DCN. 20666	4-93	DUC	DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS FRACTIONAL ANGULAR .X ± .030 X' ± 1'0" .XX ± .015 ± 1/64 .XXX ± .005 X'X' ± 15"	FINISH	SMA 4 HOLE FLANGE MT. JACK RECEPTACLE FOR RG 178/U CABLE.
				DRAWN <i>T.</i> DATE 12-23-85	SCALE	DRAWING NO.
				CHECKED DATE	<i>6X</i>	M39012/58-3006
				APPROVED <i>D</i> DATE 2-26-86	CODE IDENT. NO.	SHT. 2 OF 2
					95077	
					A	