

REV	ECO	DATE		
><	$\setminus$	$\bigg\rangle\!\!\!\bigg\rangle$		
E	24616	12/27/2012		
F	25235	10/22/2014		



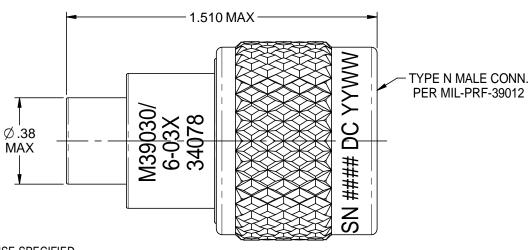

PER MIL-PRF-39012

NOTES: UNLESS OTHERWISE SPECIFIED.

- 1. MATERIAL AND FINISH:
- 1.1 HOUSING & COUPLING NUT: NICKEL PLATED STAINLESS STEEL
- 1.2 DIELECTRIC: PTFE (TEFLON)
- 1.3 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
- 1.4 GASKET: SILICONE RUBBER
- 1.5 DUST CAP (NOT SHOWN): POLYETHYLENE
- 2. ELECTRICAL SPECIFICATIONS:
- 2.1 FREQUENCY RANGE: .03 12.4 GHz
- 2.2 VSWR (MAX): 1.10:1
- 2.3 POWER HANDLING:
- 2.3.1 1 WATT AVERAGE, 0.5 KW PEAK
- 2.3.2 AVERAGE INPUT POWER IS DERATED LINEERALY FROM 100% AT 25°C TO 10% AT SPECIFIED MAXIMUM AMBIENT OPERATING TEMPERATURE.
- 3. MECHANICAL SPECIFICATIONS:
- 3.1 OPERATING TEMP. RANGE: -55°C TO 125°C
- 3.2 WEIGHT (MAX): 3 OUNCES (85 GRAMS)
- 4. TEST PER ATP-07840-60-002.
- 4.1 SWEEP DATA .05 12.4 GHz
- 5. TEST DATA BAGGED WITH EACH UNIT.

cinch	Model No. M39030/6-03(N OR S)		MIDWEST MICROWAVE				
a bel group	RoHS2 <b>☑</b>	Cage Code 34078	Title: TERMINATION Drawing No. I Rev.				
This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in	2011/65/EU UNLESS OTHERWISE SPECIFIED:	3RD ANGLE PROJECTION					Bou
nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable	.λ∧ ±.∪∠	Drawn by:  C. WALLACE	M39030/6-03(N OR S)-01				F
upon demand.  INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.	.XXX ±.005 ANGLES ±1°	.005 Date:		DO NOT SCALE	Workmanship Std:	Sheet	1 of 1