

MODEL NUMBER
M39030/6-07(N OR S)

NOTES:

1.0 ELECTRICAL SPECIFICATIONS

- 1.1 FREQUENCY RANGE: DC TO 18.0 GHz
- 1.2 VSWR: 1.025 + .004f (GHz) MAX.
- 1.3 POWER HANDLING: 2 WATTS AVG.
1.0 KILOWATT PEAK
- 1.4 OPERATING TEMP. RANGE: -55°C to +125°C
- 1.5 WEIGHT: 3 Oz. MAX.

2.0 MARK UNIT AS SHOWN:

(REF: INK-09183-27-[27 or 29])


2.1 MARK SERIAL NUMBER AND DATE CODE ON UNIT.

SN XXXX
DC YYWW

4-DIGIT SERIAL NO.
YEAR(Y Y) & WEEK(W W) OF PRODUCTION

3.0 TESTING: TEST PER ATP-07840-60-02.

4.0 DUST CAP SUPPLIED WITH UNIT.

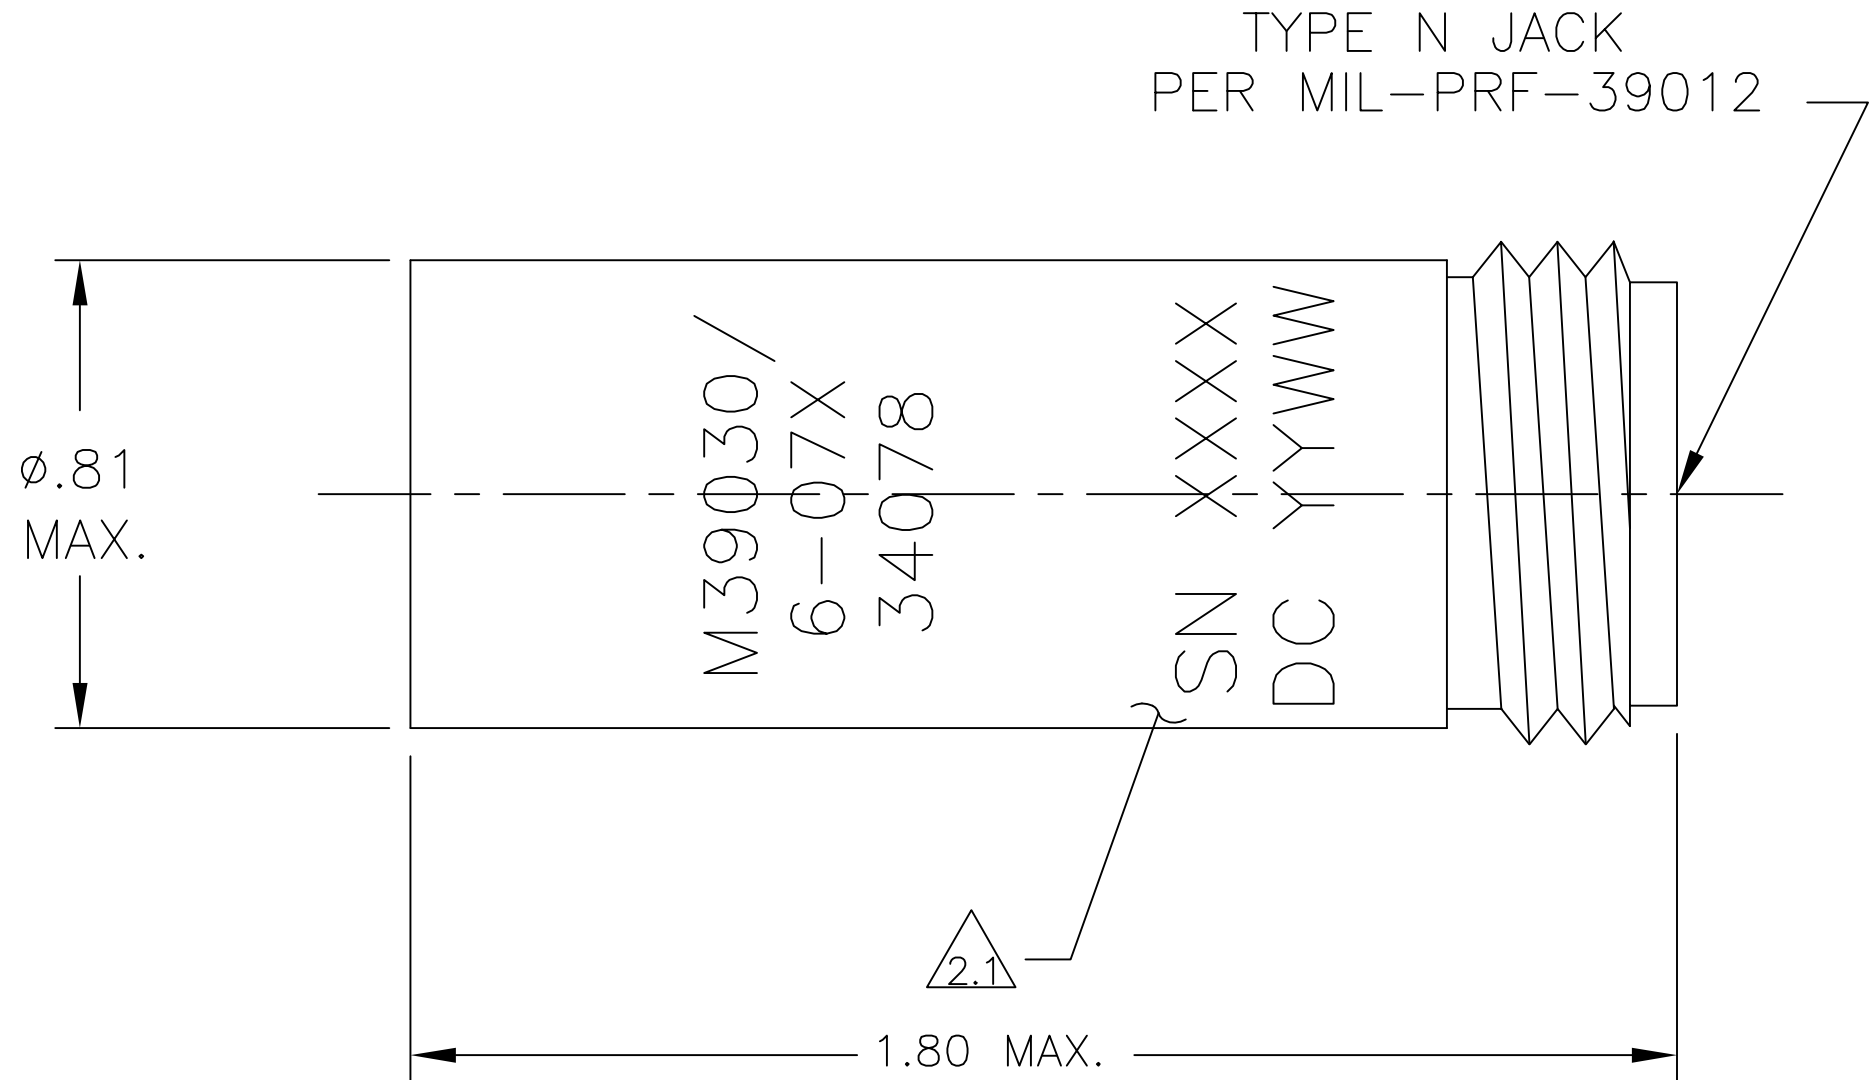

REV.	DESCRIPTION	DATE
I	RELEASED	12/10/93
A	ECN 13500	4/8/94
B	ECN 13664	6/3/94
C	ECN 19546	12/23/03
F	ECO 24773	5/16/13

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.	CAGE CODE 34078	MIDWEST MICROWAVE	
	<p>EMERSON Network Power Connectivity Solutions</p>		TITLE TERMINATION OUTLINE DRAWING
UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'	DRAWN/DATE C. WALLACE 8/15/13	ENG./DATE P. KLYVE 5/16/13	DRAWING NUMBER M39030/6-07(N OR S)-01
	CHECKED/DATE P. KLYVE 8/16/13	APPROVED/DATE P. KLYVE 8/16/13	REV. F
SCALE: 2=1		SHEET 1 of 1	