



**M50 SERIES**  
POWER MODULES



**Features**

- Over 40KW output Capability
- 8 Different Circuits to Choose from
- 50 and 100 A outputs
- UL Recognized E72445

**ORDERING OPTIONS**

**M50** - **50** - **1** - **2** - **F** - **V**

Series **M50**

Load Current **50**: 50 Amps  
**100**: 100 Amps

Circuit Type **1 2 3 4 5 6 7 8**  
(See schematic diagrams)

AC Line Voltage **1**: 120 VAC  
**2**: 240 VAC  
**3**: 280 VAC  
**2**: 380 VAC  
**3**: 480 VAC

Free Wheeling Diode **Blank**: Not Included  
**F**: Included (Circuits 1 & 2 only)

External Suppressor **Blank**: Not included  
**V**: Include (Circuits 1, 2, 3, 4, 6 & 7 only)

— Required for valid part number  
□ For options only and not required for valid part number


**NOTE: Not all Combinations available**

# ELECTRICAL SPECIFICATIONS

Description	Symbol	M5060	M50100
Maximum DC Output Current (Tc= 85°C)	I <sub>D</sub>	60 A	100 A
Maximum Voltage Drop @ Amps Peak	V <sub>F</sub>	1.35V @ 50A	1.2V @ 100 A
Operating Junction Temperature Range	T <sub>J</sub>	-40 - 125°C	-40 - 125°C
Repetitive Peak Reverse Voltage (AC Line Nominal) [Vpk]	V <sub>RRMS</sub>	400 (120 VAC)	
		600 (240 VAC)	
		800 (280 VAC)	
		1200 (480 VAC)	
		1400 (530 VAC)	
		1600 (600 VAC)	
Maximum Non-Repetitive Surge Current (1/2 Cycle, 60 Hz) [A]	I <sub>TSM</sub>	800	1500
Maximum I <sup>2</sup> t for Fusing (t=8.3ms)[A <sup>2</sup> sec]	I <sup>2</sup> T	2650	9350
Maximum Thermal Resistance, Junction to Ceramic Base per Chip [°C/W]	R <sub>Jc</sub>	0.45°C/W	0.3°C/W
Insolation Voltage [Vrms]	V <sub>ISOL</sub>	2500	
Weight (typical)		4.5 oz (158g)	

# MECHANICAL SPECIFICATIONS

Tolerances: ±0.02 in / 0.5 mm  
All dimensions are in: inches [millimeters]

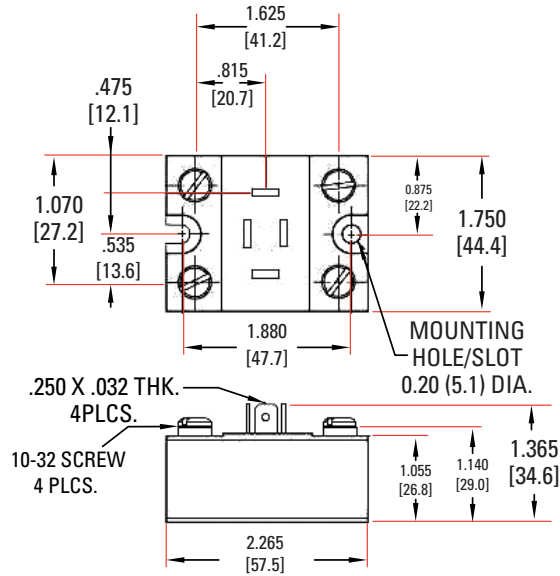

# CIRCUIT DIAGRAMS

