


## E-Series RF 1:4 Coupled Step-Up Transformer 1 - 350 MHz

Rev. V3

### Features

- Surface mount
- Wide frequency range
- 1:4 Impedance Ratio
- CT on Secondary
- Lead Free
- RoHS\* Compliant and is 2600C reflow compatible.
- Available on Tape and Reel, reel quantity 2000

### Schematic

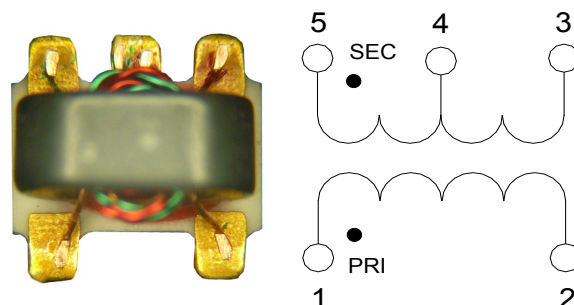

### Pin Configuration

Pin #	Function	Pin #	Function
1	Primary Dot	4	Secondary CT
2	Primary	5	Secondary Dot
3	Secondary		

### Electrical Specifications: RF Freq. = 1 - 350 MHz, $T_A = +25^\circ\text{C}$ , $P_{IN} = 0 \text{ dBm}$

Parameter	Test Conditions & Frequency	Units	Min.	Typ.	Max.
Insertion Loss	FL - fU	dB	—	—	1.0
	5 - 100 MHz				2.0
	2 - 300 MHz				3.0
Amplitude Unbalance	5 - 100 MHz	dB	—	—	0.1
	1 - 350 MHz				0.5
Phase Unbalance	5 - 100 MHz	Degrees	—	—	1.0
	1 - 350 MHz				5.0

### Ordering Information

Part Number	Description
MABA-007237-ETC410	2000 piece reel


### Recommended Maximum Ratings<sup>1,2</sup>

Parameter	Absolute Maximum
DC Power	250 mW
DC Current	30 mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C


1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. MACOM does not recommend sustained operation near these survivability limits.

### Typical Performance Curves


**Insertion Loss**

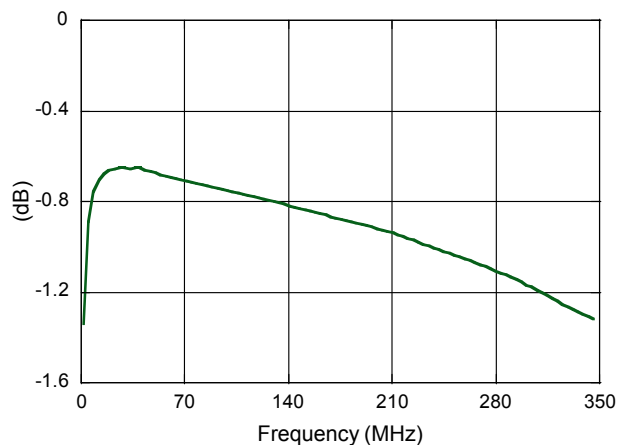


**Phase Balance**

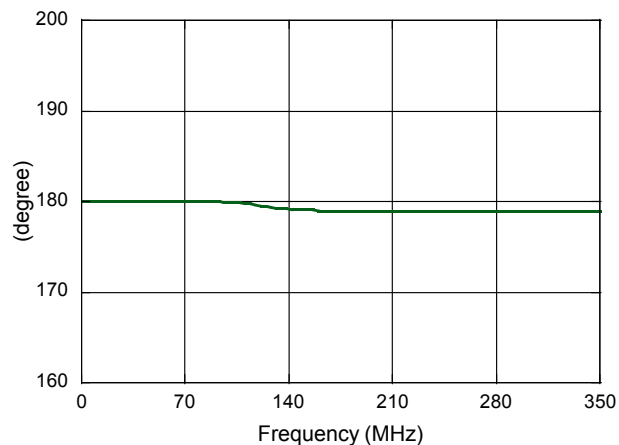

**Amplitude Balance**

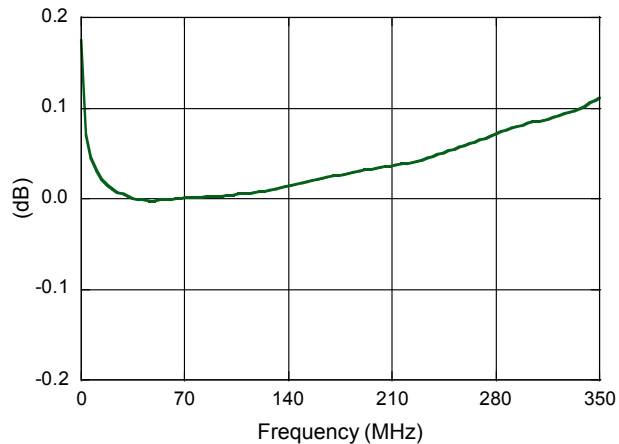


### Outline Drawing

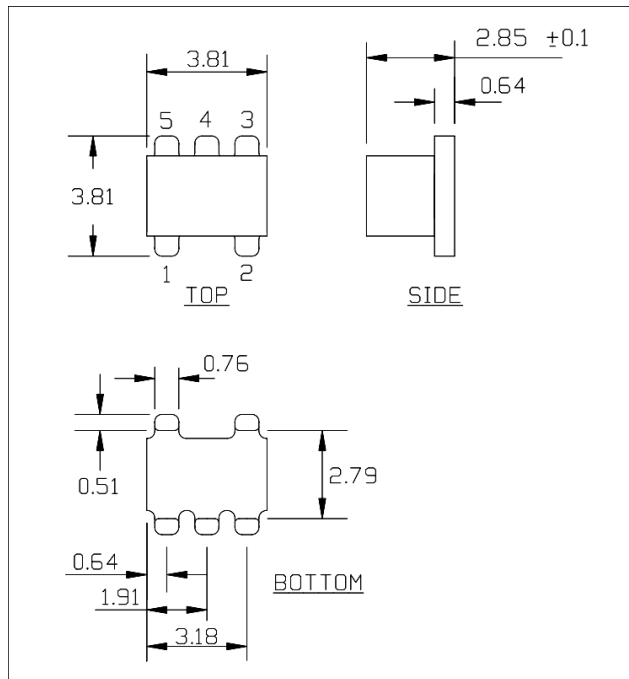

1. Dimensions in mm.
2. Tolerance: ±0.2 mm unless otherwise noted.
3. Model number and lot code printed on reel.

### Recommended Footprint

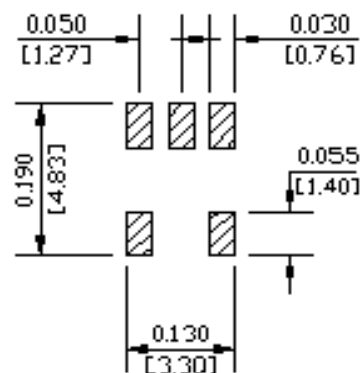

### Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	2000
Reel size	mm	330
Tape width (W)	mm	12.0
Pitch (P <sub>1</sub> )	mm	12.0
Orientation	-	F5
Reference Application Note ANI-019 for orientation		