



MBR1040F SERIES

10 AMPERES SCHOTTKY BARRIER RECTIFIERS

VOLTAGE 40 to 200 Volt CURRENT 10 Ampere

FEATURES


- Plastic package has Underwriters Laboratory Flammability Classification 94V-O.
- Flame Retardant Epoxy Molding Compound.
- Low power loss, high efficiency.
- High current capability
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications.
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

MECHANICAL DATA

- Case: ITO-220AC molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: As marked.
- Weight: 0.055 ounces, 1.56 grams.

ITO-220AC

Unit : inch(mm)

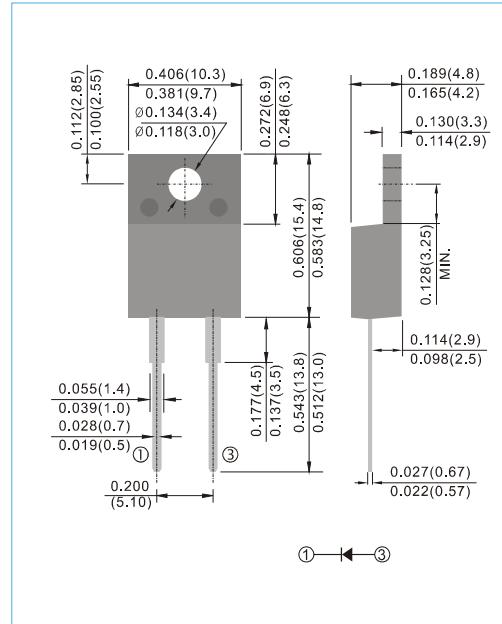

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

PARAMETER	SYMBOL	MBR1040F	MBR1045F	MBR1050F	MBR1060F	MBR1080F	MBR1090F	MBR10100F	MBR10150F	MBR10200F	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	40	45	50	60	80	90	100	150	200	V
Maximum RMS Voltage	V_{RMS}	28	31.5	35	42	56	63	70	105	140	V
Maximum DC Blocking Voltage	V_{DC}	40	45	50	60	80	90	100	150	200	V
Maximum Average Forward Current (See fig.1)	$I_{F(AV)}$										A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load	I_{FSM}										A
Maximum Forward Voltage at 10A, per leg	V_F		0.7		0.75		0.8		0.9		V
Maximum DC Reverse Current at Rated DC Blocking Voltage (Note 2) $T_J = 25^\circ C$ $T_J = 125^\circ C$	I_R			0.05 20					0.05 10		mA
Typical Thermal Resistance (Note 3)	$R_{\theta JC}$						3				$^\circ C / W$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-55 to + 150					-65 to + 175				$^\circ C$

Notes: 1. Both Bonding and Chip structure are available.

2. Short duration pulse test used to minimize self-heating effect.

3. Mounted on infinite heatsink



MBR1040F SERIES

RATING AND CHARACTERISTIC CURVES

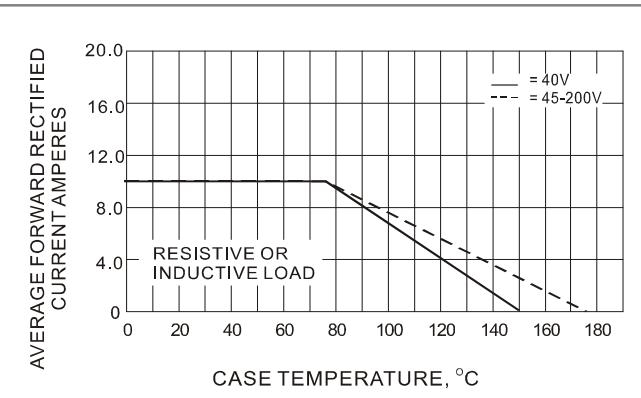


Fig.1- FORWARD CURRENT DERATING CURVE

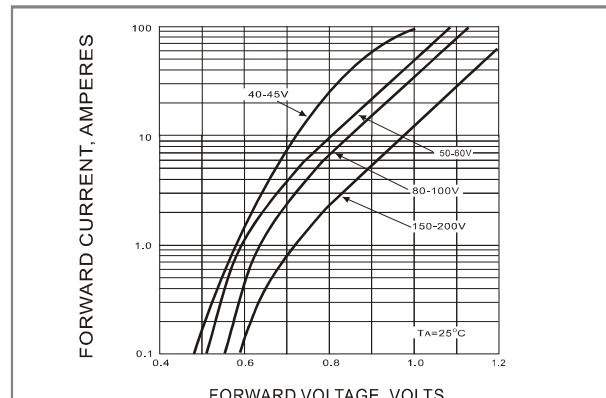


Fig.2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

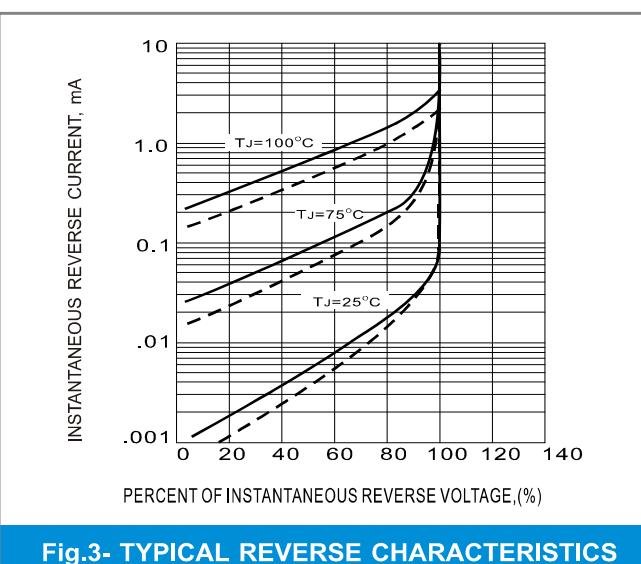


Fig.3- TYPICAL REVERSE CHARACTERISTICS

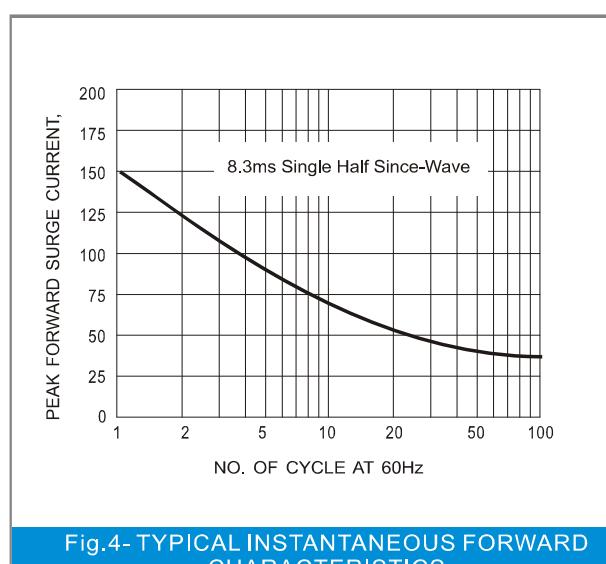


Fig.4- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

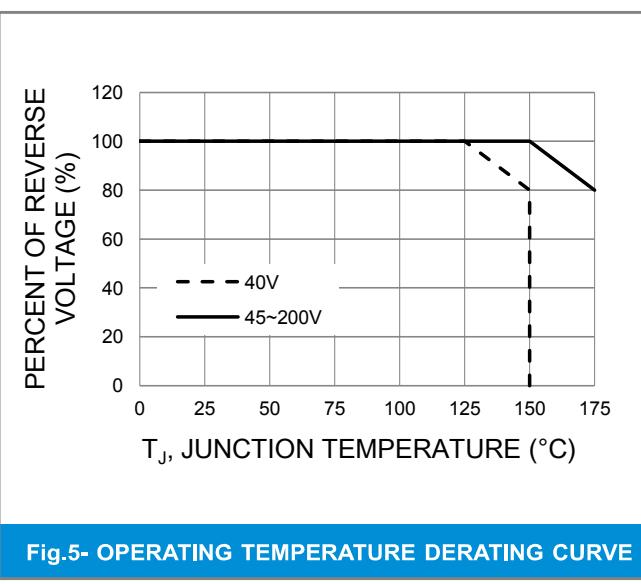


Fig.5- OPERATING TEMPERATURE DERATING CURVE