

Features

- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix Designates Compliant. See Ordering Information)
- Low Leakage Current.
- High Current Capability, High Efficiency.
- High Junction Temperature Capability.
- Epoxy Meets UL 94 V-0 Flammability Rating
- Moisture Sensitivity Level 1

Maximum Ratings

- Operating Junction Temperature Range: -55°C to +175°C
- Storage Temperature Range: -55°C to +175°C
- Typical Thermal Resistance: 0.5°C/W Junction to Case


MCC Part Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MBR30100PT	MBR30100PT	100V	70V	100V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Rectified Forward Current (Rated VR-20Khz Square Wave) - 50% Duty Cycle	$I_{F(AV)}$	30A	
Peak Forward Surge Current	I_{FSM}	300A	8.3ms, Half Sine Wave
Maximum Instantaneous Forward Voltage	V_F	0.77V(Typ) 0.80V(Max) 0.72V(Max)	$I_F=15A; T_J=25^\circ C$ $I_F=15A; T_J=25^\circ C$ $I_F=15A; T_J=125^\circ C$
Maximum Reverse Current at Rated DC Blocking Voltage	I_R	0.05mA 3.0mA	$T_J=25^\circ C$ $T_J=125^\circ C$


Note:1. High Temperature Solder Exemptions Applied, see EU Directive Annex 7a.

Internal Structure



**30 Amp Schottky Barrier Rectifier
100 Volts**

TO-247

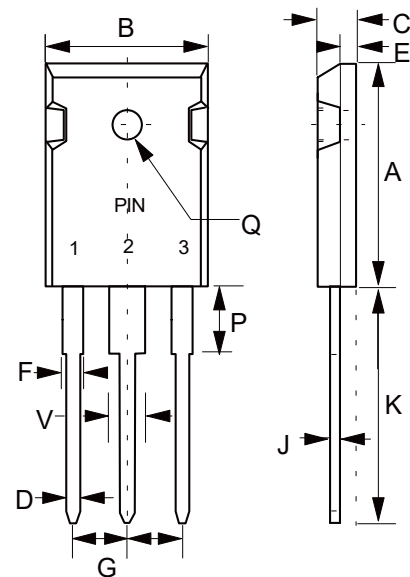

DIMENSIONS

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.787	0.866	20.00	22.00	
B	0.598	0.638	15.20	16.20	
C	0.185	0.208	4.70	5.30	
D	0.035	0.059	0.90	1.50	
E	0.059	0.094	1.50	2.40	
F	0.067	0.091	1.70	2.30	
J	0.019	0.031	0.48	0.80	
K	0.748	0.833	19.00	21.15	
P	0.122	0.189	3.10	4.80	
Q	0.118	0.150	3.00	3.80	Φ
V	0.106	0.134	2.70	3.40	
G	0.197	0.224	5.00	5.70	

Curve Characteristics

Fig. 1 - Typical Instantaneous Forward Characteristics

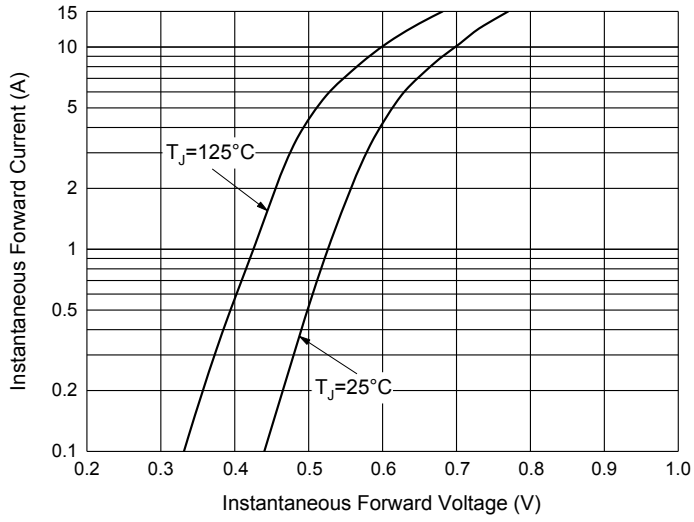


Fig. 2 - Typical Reverse Leakage Characteristics

