



MBR8H120PC-AU

Surface Mount Ultra Low I_{R} Schottky Barrier Rectifier

Voltage

120 V

Current

8 A


Features

- Low leakage current
- Ideal for automated placement
- Low power loss, high efficiency
- High surge current capability
- AEC-Q101 qualified
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

Mechanical Data

- Case : TO-277C package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.11 grams

TO-277C



Maximum Ratings and Thermal Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	120	V
Maximum RMS Voltage	V_{RMS}	84	V
Maximum DC Blocking Voltage	V_{DC}	120	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	8	A
Peak Forward Surge Current : 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	160	A
Typical Junction Capacitance Measured at 1 MHZ And Applied $V_R = 4\text{ V}$	C_J	134	pF
Typical Thermal Resistance	(Note 1)	$R_{\theta JA}$	
	(Note 2)	$R_{\theta JC}$	$^\circ\text{C/W}$
	(Note 2)	$R_{\theta JL}$	20
Operating Junction Temperature Range	T_J	-55~175	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55~175	$^\circ\text{C}$



MBR8H120PC-AU

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Forward Voltage	V_F	$I_F = 1 \text{ A}, T_J = 25^\circ\text{C}$	-	0.65	-	V
		$I_F = 3 \text{ A}, T_J = 25^\circ\text{C}$	-	0.74	-	
		$I_F = 8 \text{ A}, T_J = 25^\circ\text{C}$	-	-	0.87	
		$I_F = 1 \text{ A}, T_J = 125^\circ\text{C}$	-	0.51	-	
		$I_F = 3 \text{ A}, T_J = 125^\circ\text{C}$	-	0.6	-	
		$I_F = 8 \text{ A}, T_J = 125^\circ\text{C}$	-	0.7	-	
Reverse Current ^(Note 3)	I_R	$V_R = 96 \text{ V}, T_J = 25^\circ\text{C}$	-	24	-	nA
		$V_R = 120 \text{ V}, T_J = 25^\circ\text{C}$	-	-	1	uA
		$V_R = 120 \text{ V}, T_J = 125^\circ\text{C}$	-	-	225	

NOTES :

1. Mounted on a FR4 PCB, single-sided copper, standard footprint.
2. Mounted on a FR4 PCB, single-sided copper, with 100 cm^2 copper pad area.
3. Short duration pulse test used to minimize self-heating effect.



MBR8H120PC-AU

TYPICAL CHARACTERISTIC CURVES

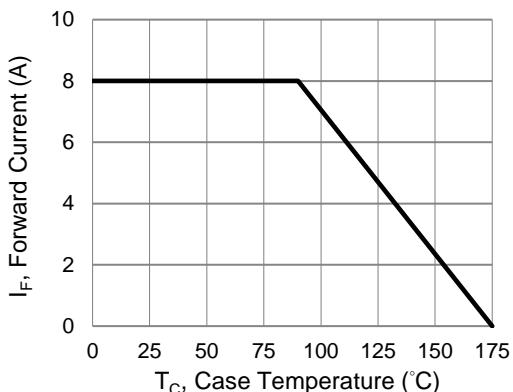


Fig.1 Forward Current Derating Curve

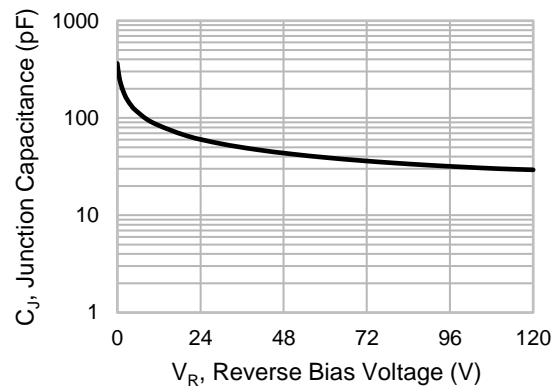


Fig.2 Typical Junction Capacitance

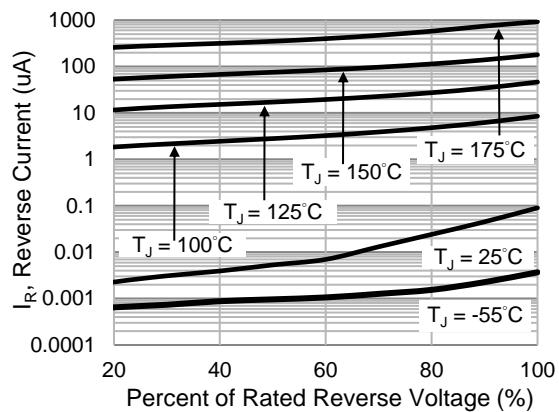


Fig.3 Typical Reverse Characteristics

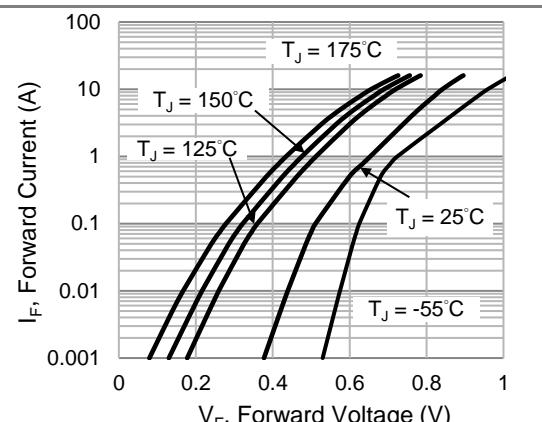


Fig.4. Typical Forward Characteristics

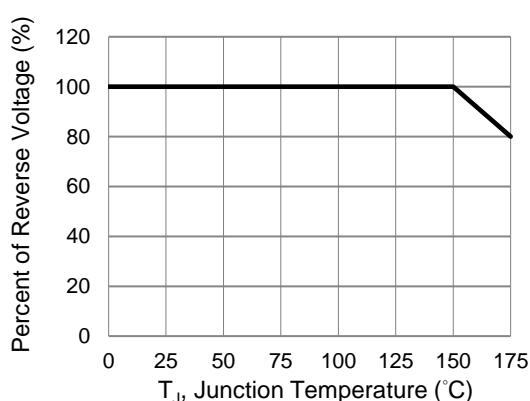


Fig.5 Operating Temperature Derating Curve



MBR8H120PC-AU

Part No. Packing Code Version

Part No.	Package Type	Packing Type	Marking	Version
MBR8H120PC-AU	TO-277C	5K / 13" reel	MBR8H120PC	Halogen free RoHS compliant

Packaging Information & Mounting Pad Layout

