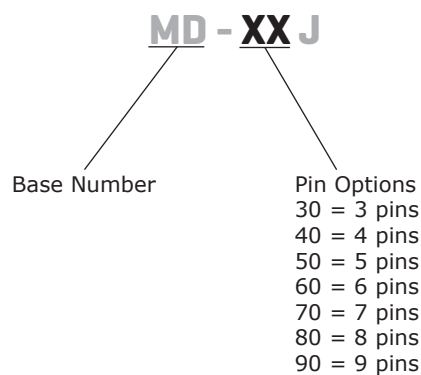


**SERIES:** MD-J | **DESCRIPTION:** MINI DIN CONNECTOR**FEATURES**

- recessed face
- includes strain relief

**PART NUMBER KEY****SPECIFICATIONS**

| parameter             | conditions/description  | min | typ       | max    | units      |
|-----------------------|-------------------------|-----|-----------|--------|------------|
| rated input voltage   |                         |     | 100<br>12 |        | Vac<br>Vdc |
| rated input current   | at 100 Vac<br>at 12 Vdc |     |           | 1<br>2 | A<br>A     |
| contact resistance    |                         |     |           | 30     | mΩ         |
| insulation resistance | at 250 Vdc              | 50  |           |        | MΩ         |
| voltage withstand     | for 1 minute            |     |           | 250    | Vac        |
| insertion force       |                         |     |           | 4.5    | kg         |
| withdrawal force      |                         | 0.9 |           | 3      | kg         |
| operating temperature |                         | -20 |           | 85     | °C         |
| life                  |                         |     | 5,000     |        | cycles     |
| flammability rating   | UL94HB                  |     |           |        |            |
| RoHS                  | yes                     |     |           |        |            |


## MECHANICAL DRAWINGS

units: mm[inches]


TOLERANCE: ±0.1mm




|                    | MATERIAL           | PLATING |
|--------------------|--------------------|---------|
| shell              | copper             | nickel  |
| pin contacts (1~9) | brass              | silver  |
| insulator          | Nylon6+glass fiber |         |
| boot               | PE + 2L            |         |
| hood               | ABS (PA-757)       |         |

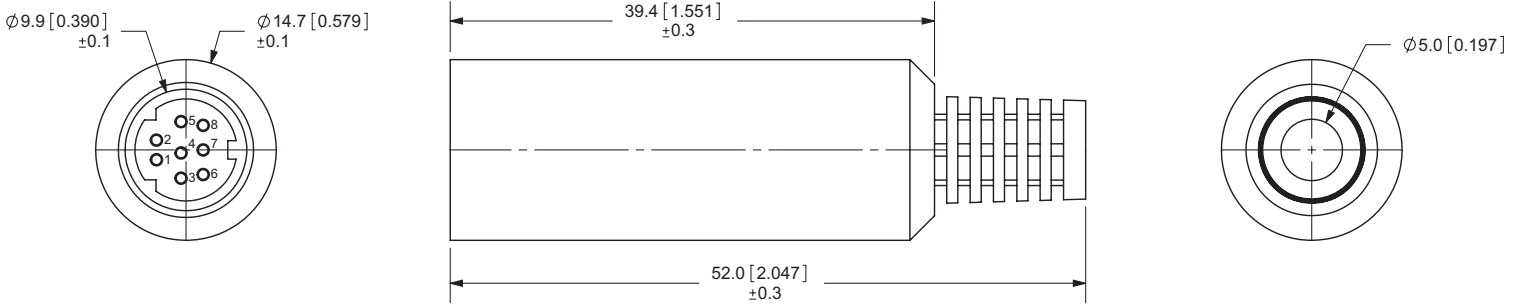


### MD-30J




### MD-40J




### MD-50J




### MD-60J



### MD-70J



### MD-80J



### MD-90J

