



MEA-1621-GGG

GPS/GLONASS/IRIDIUM/CELLULAR ANTENNA

Ordering Part #: 100-00098-01

Description

The MEA-1621-GGG is an external antenna designed for the Iridium, GPS, GLONASS, and cellular networks. The antenna provides exceptional pattern control, polarization purity and high efficiency. It offers a low profile design with easy mounting, featuring three cables with integrated SMA connectors and is rated IPX7. This low profile antenna is designed with rugged PC+ABS plastic black housing and is ideal for the most demanding environmental challenges. The MEA-1621-GGG provides outstanding performance for any telematics and fleet management application.

GPS/GLONASS Electrical Specifications

Parameter	Specifications
Frequency	1575.42 / 1602 MHz
VSWR	2.0 : 1 Max
Impedance	50 Ohm
Polarization	Linear
Gain @ Zenith	3 dBi Typ. @ 1575 MHz / 2.5 dBi Typ. @ 1602 MHz

LNA Electrical Specifications

Parameter	Specifications
Frequency	1575.42 / 1602 MHz
VSWR	2.0 : 1 Max
Impedance	50 Ohm
Antenna Gain (@3.3V)	28 dB Typ. / 25 dB Min.
DC Power Input	3 ~ 5 V
Noise Figure	3 dB Typ.
Power Consumption (@3.3V)	9 Typ. mA

Cellular Electrical Specifications

Parameter	Specifications
Frequency	824~960 / 1710~2170 MHz
VSWR	824~960 MHz < 6.0 / 1710~2170 MHz < 4.0
Impedance	50 Ohm
Peak Gain	-0.56~2.69 dBi @ 824~960 MHz 1.69~5.2 dBi @ 1710~2170 MHz
Average Efficiency	824~960 MHz > 45% 1710~2170 MHz > 50%



Features

- Optimized for GPS/GLONASS/IRIDIUM/ Cellular networks
- Easy mounting
- 1m cable length
- RG-174, CFD-200 cables
- Rugged housing
- Customer specification connectors
- IPX7 waterproof housing

Applications

- Vehicle and fleet tracking
- Military & security
- Asset tracking
- Iridium (SBD) Short Burst Data
- Oil & gas industries
- Navigation devices
- Mining equipment
- LBS & M2M applications
- Handheld devices
- Law enforcement



MEA-1621-GGG

GPS/GLONASS/IRIDIUM/CELLULAR ANTENNA


Iridium Electrical Specifications

Parameter	Specifications
Frequency	1621 MHz
VSWR	2.0 : 1 Max
Impedance	50 Ohm
Polarization	RHCP
Gain @ Zenith	3.5 dBic Min. @ 1621 MHz


Mechanical Specifications

Parameter	Specifications
Antenna Dimensions (mm)	Diameter 145 x (H) 32.8 mm
Mounting Function	Screw Mount
Operating Temperature	-40 °C ~ +85 °C
Housing Material & Color	PC + ABS & Black
Cable	RG-174 (GPS) / CFD-200 (Cellular) / CFD-200 (Iridium)
Cable Length	1 meter
Connector	SMA / FAKRA or customer specified
Waterproof	IPX7

Iridium Patterns

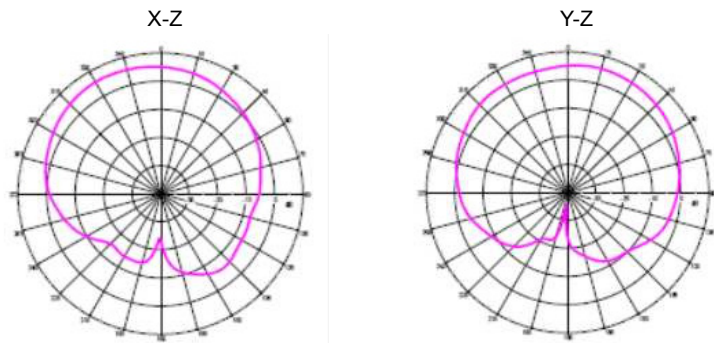

GPS/GLONASS Patterns

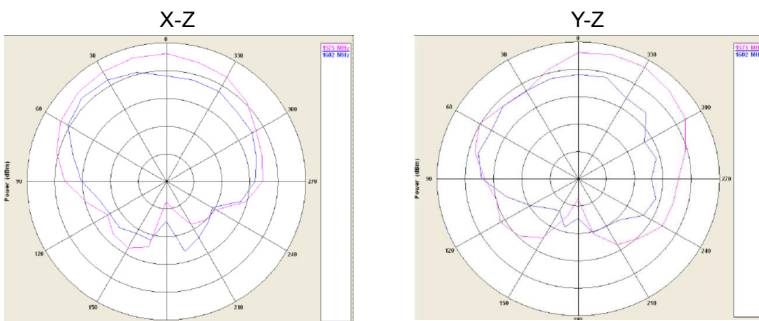

Cellular Patterns

