



MEA-2410-LP-CM

2.4 GHz ISM Connector Mount

Part #: 100-00274-01

Description

The MEA-2410-LP-CM connector mount Antenna is a low profile antenna solution, with a very high-performance ideal for maintaining constant network connectivity. The MEA-2410-LP-CM covers all WiFi, BT, ZigBee, and ISM standard frequencies. This is an ideal antenna for telematics systems, remote surveillance, asset tracking and any IOT system applications.

The MEA-2410-LP-CM is easy to install with maximum durability and anti-rotation mounting. The high performance and low profile make this antenna ideal for the most challenging installations.

Electrical Specification

Parameter	Specifications
Standards	WiFi, BT, ZigBee, ISM
Band	2.4 GHz
Frequency Range (MHz)	2410-2490
Return Loss (dB)	~16.4
VSWR	~1.3:1
Efficiency (%)	~71
Peak Gain (dBi)	~3.2
Average Gain (dB)	~1.4
Impedance (Ohm)	50
Polarization	Linear
Radiation Pattern	Omni-Directional
Max Input Power	25
Connector Type	RP-SMA-Male-RA Standard

Mechanical Specification

Parameter	Specifications
Antenna Dimensions (mm)	53 × 10 × 18
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Mounting Type	Connector Mount
Radome/Color	TPE/ Black
Substance Compliance	RoHS
Measured in	Certified CTIA 3D Anechoic Chamber

*Mounted on Ground Plane of 70x35 mm



Features

- 2.4 GHz ISM (2410-2490 MHz)
- Easy mounting: Connector Mount
- High efficiency
- Low Profile
- Dimensions 53 × 10 × 18 mm



Applications



- Wi-Fi applications
- Navigation and telematics systems
- IoT applications
- Automotive connectivity
- Multimedia
- Fleet management
- HD video and audio streaming




Maxtena Inc.
7361 Calhoun Place, Suite 102
Rockville, MD 20855
1-877-629-8362
info@maxtena.com

www.maxtena.com

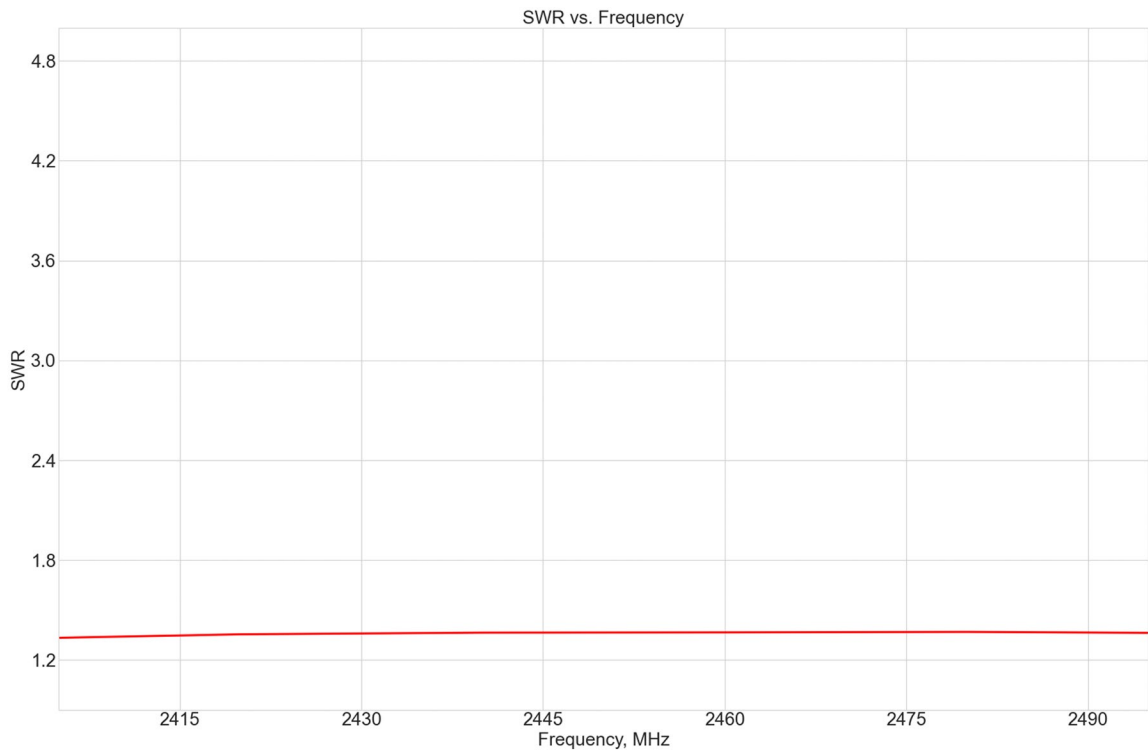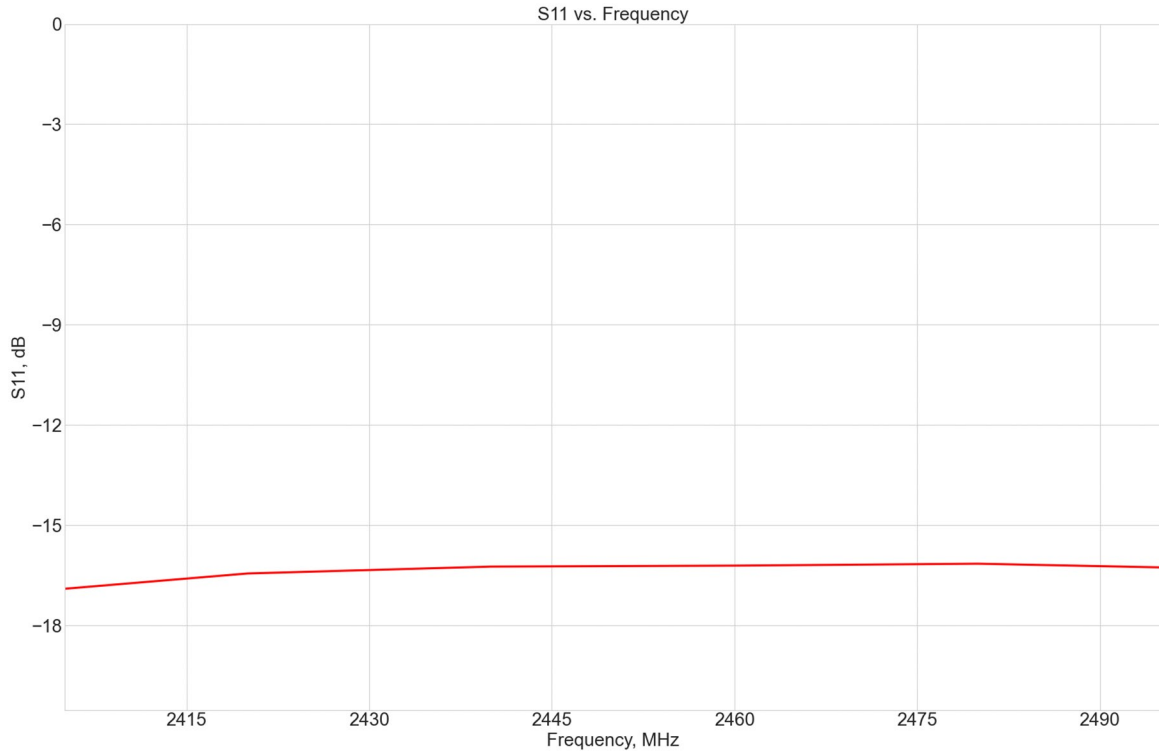

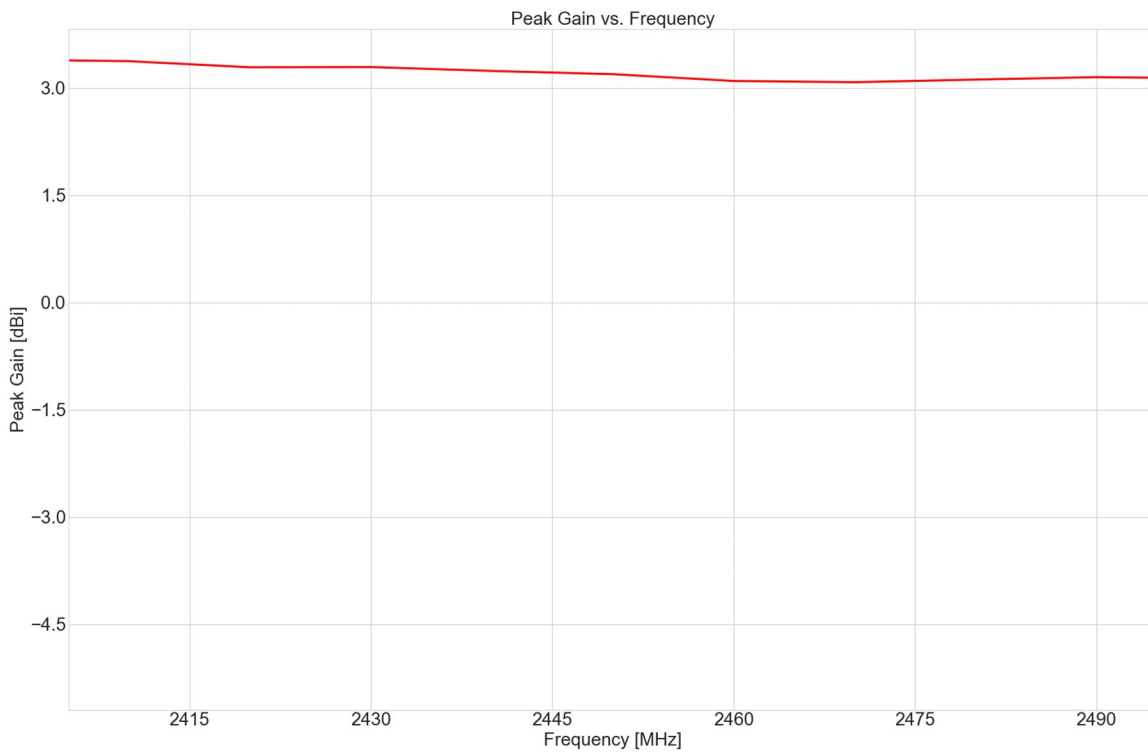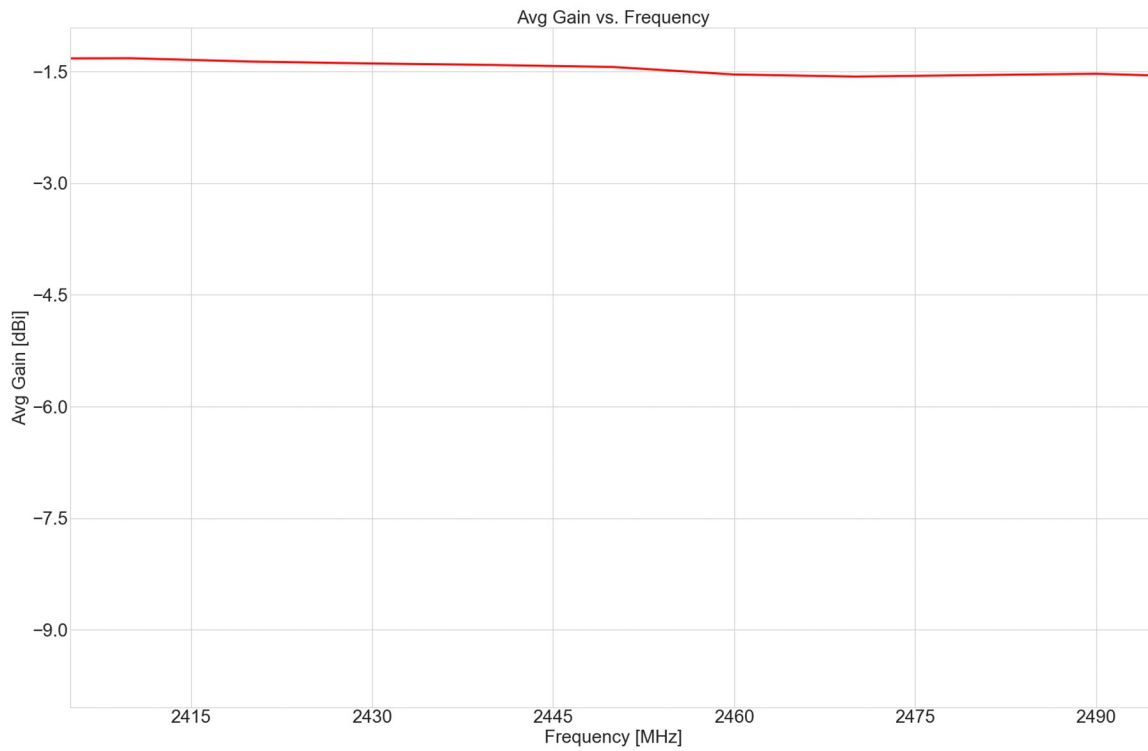

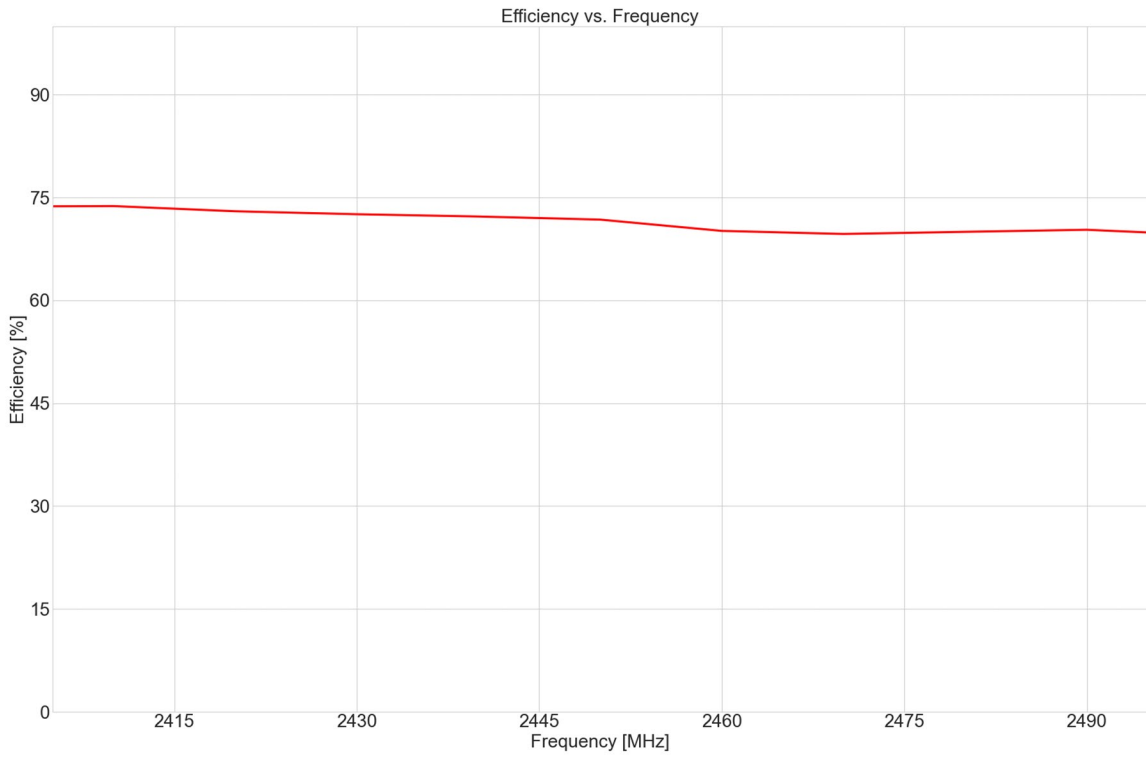

Maxtena Inc.
7361 Calhoun Place, Suite 102
Rockville, MD 20855
1-877-629-8362
info@maxtena.com
www.maxtena.com