





## Features

- Compliant with AEC-Q200 Rev-D Stress Test Qualification for Passive Components in Automotive Applications
- 100 % electrically compatible with all previous generations of 1812 SMT devices
- Compatible with Pb and Pb-free solder reflow profiles
- RoHS compliant\* and halogen free\*\*
- Surface mount packaging for automated assembly
- Agency recognition:  
- Standard 4532 mm (1812 mils) footprint

## MF-MSMF Series - PTC Resettable Fuses

### Electrical Characteristics

Model	V <sub>max</sub>	I <sub>max</sub>	I <sub>hold</sub>	I <sub>trip</sub>	Resistance		Max. Time to Trip		Tripped Power Dissipation	Agency Recognition		AEC-Q200 Compliant
			at 23 °C		at 23 °C Ohms		at 23 °C		at 23 °C Watts	cUL	TÜV	
	Volts	Amps	Amps		R <sub>Min</sub>	R <sub>1Max</sub>	Amps	Seconds	Typ.	E174545	R50256634	
MF-MSMF010	60	40	0.1	0.3	0.7	15	0.5	1.5	0.8	✓	✓	✓
MF-MSMF014	60	40	0.14	0.34	0.4	6.5	1.5	0.15	0.8	✓	✓	✓
MF-MSMF020	30	80	0.2	0.4	0.4	6.0	6.0	0.06	0.8	✓	✓	✓
MF-MSMF020/60	60	40	0.2	0.4	0.4	6.0	1.5	0.15	0.8	✓	✓	✓
MF-MSMF030	30	10	0.3	0.6	0.3	3.0	8.0	0.1	0.8	✓	✓	✓
MF-MSMF050	15	100	0.5	1.0	0.15	1.0	8.0	0.15	0.8	✓	✓	✓
MF-MSMF050/30X	30	40	0.5	1.0	0.15	1.3	8.0	0.15	0.8	✓	✓	✓
MF-MSMF050/40X	40	20	0.5	1.0	0.15	1.3	8.0	0.15	0.8	✓		
MF-MSMF075	13.2	100	0.75	1.5	0.11	0.45	8.0	0.2	0.8	✓	✓	✓
MF-MSMF075/24	24	40	0.75	1.5	0.11	0.45	8.0	0.2	0.8	✓	✓	✓
MF-MSMF075/33X	33	20	0.75	1.5	0.11	0.40	8.0	0.2	1.4	✓		✓
MF-MSMF110	6	100	1.1	2.2	0.04	0.21	8.0	0.3	0.8	✓	✓	
MF-MSMF110/16	16	100	1.1	2.2	0.04	0.21	8.0	0.3	0.8	✓	✓	✓
MF-MSMF110/24X	24	20	1.1	2.2	0.06	0.18	8.0	0.5	0.8	✓	✓	✓
MF-MSMF125	6	100	1.25	2.5	0.05	0.14	8.0	0.4	0.8	✓	✓	
MF-MSMF150	6	100	1.5	3.0	0.03	0.12	8.0	0.5	0.8	✓	✓	
MF-MSMF150/12	12	100	1.5	3.0	0.03	0.12	8.0	0.5	0.8	✓	✓	✓
MF-MSMF150/24X	24	20	1.5	3.0	0.03	0.12	8.0	1.5	1.0	✓	✓	✓
MF-MSMF160	8	100	1.6	2.8	0.035	0.099	8.0	2.0	0.8	✓	✓	
MF-MSMF200	8	40	2.0	4.0	0.020	0.080	8.0	2.0	0.8	✓	✓	
MF-MSMF250/16X	16	100	2.5	5.0	0.015	0.100	8.0	5.0	1.2	✓	✓	✓
MF-MSMF260	6	100	2.6	5.2	0.015	0.080	8.0	5.0	0.8	✓	✓	
MF-MSMF260/16X	16	100	2.6	5.0	0.015	0.050	8.0	5.0	1.2	✓	✓	✓
MF-MSMF300X	6	100	3.0	5.0	0.010	0.040	8.0	5.0	1.2	✓		

### Environmental Characteristics

Item	Condition	Criteria
Operating Temperature	-40 °C to +85 °C	
Recommended Storage	+40 °C max. / 70 % R.H. max.	
Passive Aging	+85 °C, 1000 hours	±5 % typical resistance change
Humidity Aging	+85 °C, 85 % R.H. 1000 hours	±5 % typical resistance change
Thermal Shock	-40 °C to +85 °C, 20 times	±10 % typical resistance change
Solvent Resistance	MIL-STD-202, Method 215	No change (marking still legible)
Vibration	MIL-STD-883C, Method 2007.1 Condition A	No change (R <sub>min</sub> < R < R <sub>1max</sub> )
Moisture Sensitivity Level (MSL)	<a href="#">See Note</a>	
ESD Classification	Class 6 (per AEC-Q200-2, HBM)	

### Additional Information

Click these links for more information:



[PRODUCT SELECTOR](#) [TECHNICAL LIBRARY](#) [INVENTORY](#) [SAMPLES](#) [CONTACT](#)



**WARNING**  
Cancer and Reproductive Harm  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

\* RoHS Directive 2015/863, Mar 31, 2015 and Annex.  
\*\* Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.  
Specifications are subject to change without notice. Users should verify actual device performance in their specific applications. The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

## Applications

- Overcurrent and overtemperature protection of automotive electronics
- Hard disk drives
- PC motherboards
- PC peripherals
- Point-of-sale (POS) equipment
- PCMCIA cards
- USB port protection - USB 2.0, 3.0 & OTG
- HDMI 1.4 Source protection

## MF-MSMF Series - PTC Resettable Fuses

**BOURNS®**

### Test Procedures and Requirements

Item	Test Condition	Accept/Reject Criteria
Visual/Mechanical	Verify dimensions and materials	Per MF physical description
Resistance	In still air @ 23 °C	$R_{min} \leq R \leq R_{max}$
Time to Trip	At specified current, $V_{max}$ , 23 °C, still air	$T \leq$ max. time to trip (seconds)
Hold Current	30 min. at $I_{hold}$ , still air	No trip
Trip Cycle Life	$V_{max}$ , $I_{max}$ , 100 cycles	No arcing or burning
Trip Endurance	$V_{max}$ , $I_{max}$ , 48 hours	No arcing or burning
Solderability	245 °C $\pm$ 5 °C, 5 seconds	95 % min. coverage

### Product Dimensions (see next page for outline drawings)

Model	Style	A		B		C		D
		Min.	Max.	Min.	Max.	Min.	Max.	Min.
MF-MSMF010	1	$\frac{4.37}{(0.172)}$	$\frac{4.73}{(0.186)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.70}{(0.028)}$	$\frac{1.10}{(0.043)}$	
MF-MSMF014								
MF-MSMF020								
MF-MSMF020/60								
MF-MSMF030								
MF-MSMF050	1	$\frac{4.37}{(0.172)}$	$\frac{4.73}{(0.186)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.55}{(0.022)}$	$\frac{0.85}{(0.033)}$	$\frac{0.30}{(0.012)}$
MF-MSMF050/30X	2	$\frac{4.37}{(0.172)}$	$\frac{4.83}{(0.190)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.40}{(0.016)}$	$\frac{0.85}{(0.033)}$	
MF-MSMF050/40X								
MF-MSMF075	1	$\frac{4.37}{(0.172)}$	$\frac{4.73}{(0.186)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.55}{(0.022)}$	$\frac{0.85}{(0.033)}$	
MF-MSMF075/24								
MF-MSMF075/33X	2	$\frac{4.37}{(0.172)}$	$\frac{4.83}{(0.190)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.70}{(0.028)}$	$\frac{1.60}{(0.063)}$	
MF-MSMF110	1	$\frac{4.37}{(0.172)}$	$\frac{4.73}{(0.186)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.55}{(0.022)}$	$\frac{0.85}{(0.033)}$	
MF-MSMF110/16								
MF-MSMF110/24X	2	$\frac{4.37}{(0.172)}$	$\frac{4.83}{(0.190)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.70}{(0.028)}$	$\frac{1.60}{(0.063)}$	
MF-MSMF125	1	$\frac{4.37}{(0.172)}$	$\frac{4.73}{(0.186)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.55}{(0.022)}$	$\frac{0.85}{(0.033)}$	
MF-MSMF150								
MF-MSMF150/12								
MF-MSMF150/24X	2	$\frac{4.37}{(0.172)}$	$\frac{4.83}{(0.190)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.70}{(0.028)}$	$\frac{1.60}{(0.063)}$	
MF-MSMF160	1	$\frac{4.37}{(0.172)}$	$\frac{4.73}{(0.186)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.55}{(0.022)}$	$\frac{0.85}{(0.033)}$	
MF-MSMF200								
MF-MSMF250/16X	2	$\frac{4.37}{(0.172)}$	$\frac{4.83}{(0.190)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.70}{(0.028)}$	$\frac{1.60}{(0.063)}$	
MF-MSMF260	1	$\frac{4.37}{(0.172)}$	$\frac{4.73}{(0.186)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.45}{(0.018)}$	$\frac{0.85}{(0.033)}$	
MF-MSMF260/16X	2	$\frac{4.37}{(0.172)}$	$\frac{4.83}{(0.190)}$	$\frac{3.07}{(0.121)}$	$\frac{3.41}{(0.134)}$	$\frac{0.70}{(0.028)}$	$\frac{1.60}{(0.063)}$	
MF-MSMF300X								

DIMENSIONS:  $\frac{MM}{(INCHES)}$

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.


The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

# MF-MSMF Series - PTC Resettable Fuses



## Product Dimensions (see previous page for dimensions)


### Style 1




**Terminal material:**  
Electroless Ni under immersion Au

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$


### Recommended Pad Layout

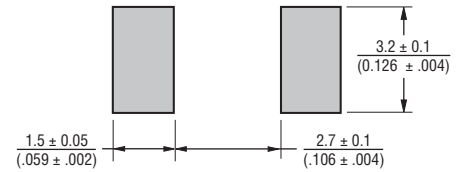



### Style 2

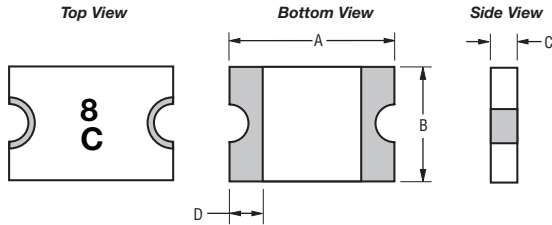

### Recommended Pad Layout

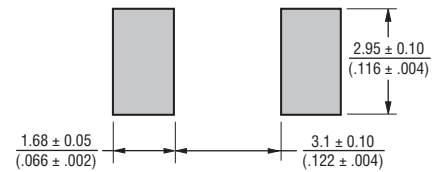

## Typical Time to Trip at 23 °C

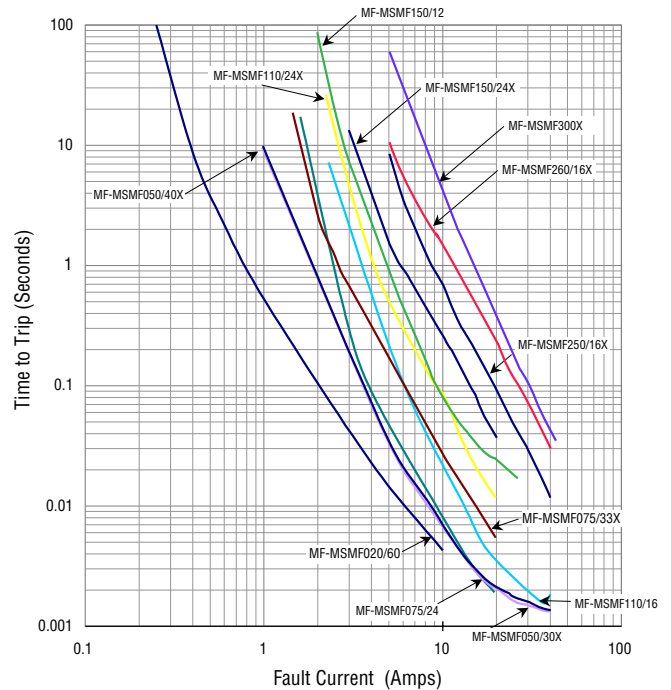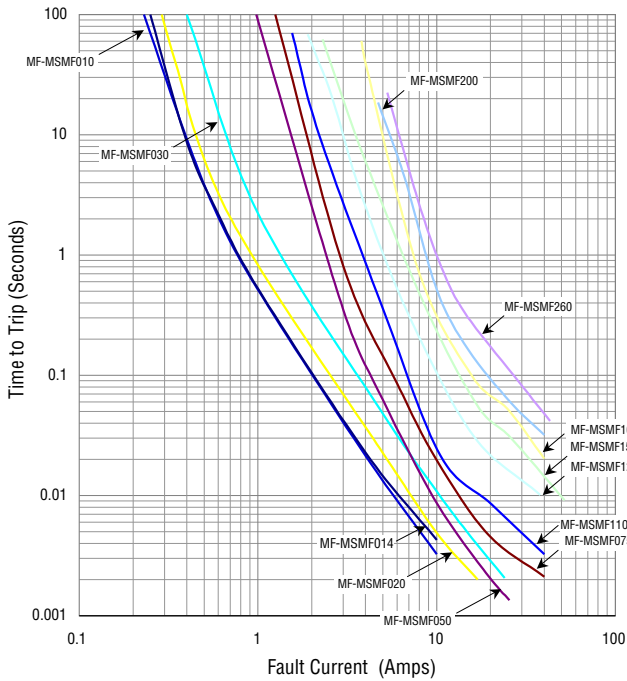

The Time to Trip curves represent typical performance of a device in a simulated application environment. Actual performance in specific customer applications may differ from these values due to the influence of other variables.

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

## MF-MSMF Series - PTC Resettable Fuses

**BOURNS®**

Thermal Derating Table - I<sub>hold</sub> (Amps)

Model	Ambient Operating Temperature								
	-40 °C	-20 °C	0 °C	23 °C	40 °C	50 °C	60 °C	70 °C	85 °C
MF-MSMF010	0.16	0.14	0.12	0.10	0.08	0.07	0.06	0.05	0.03
MF-MSMF014	0.23	0.20	0.17	0.14	0.12	0.10	0.09	0.08	0.06
MF-MSMF020	0.30	0.27	0.23	0.20	0.17	0.15	0.13	0.12	0.09
MF-MSMF020/60	0.29	0.26	0.23	0.20	0.17	0.15	0.13	0.11	0.08
MF-MSMF030	0.46	0.40	0.36	0.30	0.26	0.22	0.20	0.18	0.14
MF-MSMF050	0.77	0.68	0.59	0.50	0.44	0.40	0.37	0.33	0.29
MF-MSMF050/30X	0.77	0.68	0.59	0.50	0.44	0.40	0.37	0.33	0.25
MF-MSMF050/40X	0.77	0.68	0.59	0.50	0.44	0.40	0.37	0.33	0.25
MF-MSMF075	1.15	1.01	0.88	0.75	0.65	0.60	0.55	0.49	0.43
MF-MSMF075/24	1.15	1.01	0.88	0.75	0.65	0.60	0.55	0.49	0.43
MF-MSMF075/33X	1.16	1.03	0.90	0.75	0.63	0.56	0.49	0.42	0.32
MF-MSMF110	1.59	1.43	1.26	1.10	0.95	0.87	0.80	0.71	0.60
MF-MSMF110/16	1.59	1.43	1.26	1.10	0.95	0.87	0.80	0.71	0.60
MF-MSMF110/24X	2.00	1.70	1.40	1.10	0.95	0.88	0.80	0.73	0.61
MF-MSMF125	2.00	1.69	1.47	1.25	1.03	0.92	0.90	0.69	0.53
MF-MSMF150	2.17	1.95	1.72	1.50	1.30	1.18	1.09	0.97	0.82
MF-MSMF150/12	2.17	1.95	1.72	1.50	1.30	1.18	1.09	0.97	0.82
MF-MSMF150/24X	2.10	1.90	1.70	1.50	1.25	1.13	1.00	0.88	0.69
MF-MSMF160	2.30	2.20	1.90	1.60	1.45	1.30	1.15	1.03	0.91
MF-MSMF200	3.08	2.71	2.35	2.00	1.80	1.60	1.50	1.40	1.25
MF-MSMF250/16X	3.90	3.42	2.96	2.50	2.24	1.98	1.85	1.29	0.94
MF-MSMF260	3.40	3.16	2.90	2.60	2.32	2.18	2.00	1.90	1.69
MF-MSMF260/16X	3.50	3.20	3.00	2.60	2.30	2.15	2.00	1.85	1.63
MF-MSMF300X	4.13	3.75	3.33	3.00	2.70	2.54	2.35	2.22	1.98

### Packaging Quantity

MF-MSMF010 ~ MF-MSMF030 = 1500 pcs. per reel

MF-MSMF050 ~ MF-MSMF260 = 2000 pcs. per reel

MF-MSMF075/33X, MF-MSMF110/24X, MF-MSMF150/24X, MF-MSMF250/16X, MF-MSMF260/16X & MF-MSMF300X = 1500 pcs. per reel

**BOURNS®**

Asia-Pacific: Tel: +886-2 2562-4117 • Email: asiacus@bourns.com

EMEA: Tel: +36 88 885 877 • Email: eurocus@bourns.com

The Americas: Tel: +1-951 781-5500 • Email: americus@bourns.com

[www.bourns.com](http://www.bourns.com)

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.


The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

# MF-MSMF Series - PTC Resettable Fuses




## Typical Part Marking

Represents total content. Layout may vary.

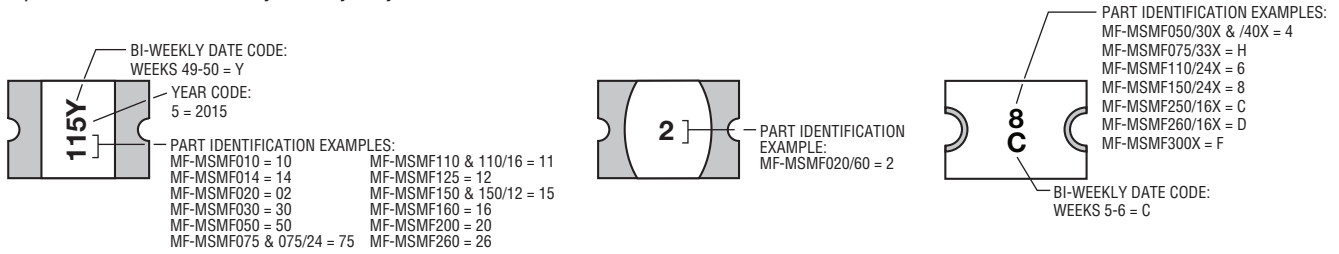

## Solder Reflow Recommendations

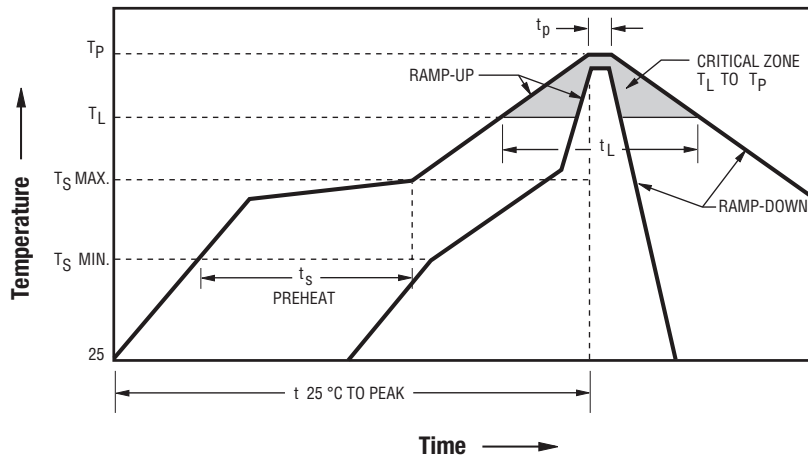

### Notes:

- MF-MSMF models are intended for reflow soldering (including but not limited to heating plate, hot air, IR, nitrogen, and vapor phase).
- Wave soldering is permissible only if the device is on the top of the PCB, opposite the heat source.
- Hand soldering is not recommended for these devices.
- All temperatures refer to the topside of the device, measured on the device body surface.
- If reflow temperatures exceed the recommended profile, devices may not meet the published specifications.
- Compatible with Pb and Pb-free solder reflow profiles.
- Excess solder may cause a short circuit.
- Please refer to the [Multifuse® Polymer PTC Resettable Fuse Soldering Recommendations](#) document for more details.

Profile Feature	Pb-Free Assembly
Average Ramp-Up Rate ( $T_{s_{max}}$ to $T_p$ )	3 °C / second max.
PREHEAT:	
Temperature Min. ( $T_{s_{min}}$ )	150 °C
Temperature Max. ( $T_{s_{max}}$ )	200 °C
Time ( $T_{s_{min}}$ to $T_{s_{max}}$ ) ( $t_s$ )	60~180 seconds
TIME MAINTAINED ABOVE:	
Temperature ( $T_l$ )	217 °C
Time ( $t_l$ )	60~150 seconds
Peak Temperature ( $T_p$ )	260 °C
Time within 5 °C of Actual Peak Temperature ( $t_p$ )	20~40 seconds
Ramp-Down Rate	6 °C / second max.
Time 25 °C to Peak Temperature	8 minutes max.

## How to Order

### MF - MSMF 075/24 - 2

Multifuse® Product Designator \_\_\_\_\_

Series \_\_\_\_\_  
 MSMF = 4532 mm (1812 mils)  
 Surface Mount Component

Hold Current, Ihold \_\_\_\_\_  
 010-300 (0.10 Amps - 3.0 Amps)

Higher Voltage Option \_\_\_\_\_  
 Blank = Standard Voltage  
 /12, /16, /24,  
 /30, /33, /40, /60 = Specific Voltage Rated  
 X = Multifuse® freeExpansion Design™

Packaging \_\_\_\_\_  
 -2 = Tape and Reel\*

\* Packaged per EIA-481

Specifications are subject to change without notice.


Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

# MF-MSMF Series Tape and Reel Specifications

**BOURNS®**

Tape Dimensions per EIA-481	MF-MSMF010 MF-MSMF014 MF-MSMF020 MF-MSMF020/60 MF-MSMF030		MF-MSMF050 MF-MSMF050/30X MF-MSMF050/40X MF-MSMF075 MF-MSMF075/24 MF-MSMF110 MF-MSMF110/16	MF-MSMF125 MF-MSMF150 MF-MSMF150/12 MF-MSMF160 MF-MSMF200 MF-MSMF260	MF-MSMF075/33X MF-MSMF110/24X MF-MSMF150/24X MF-MSMF250/16X MF-MSMF260/16X MF-MSMF300X
	W	$\frac{12.00 \pm 0.30}{(0.472 \pm 0.012)}$			
P <sub>0</sub>	$\frac{4.00 \pm 0.10}{(0.157 \pm 0.004)}$				
10 P <sub>0</sub>	$\frac{40.00 \pm 0.20}{(1.575 \pm 0.008)}$				
P <sub>1</sub>	$\frac{8.00 \pm 0.10}{(0.315 \pm 0.004)}$				
P <sub>2</sub>	$\frac{2.00 \pm 0.05}{(0.079 \pm 0.002)}$				
A <sub>0</sub>	$\frac{3.58 \pm 0.10}{(0.141 \pm 0.004)}$		$\frac{3.66 \pm 0.15}{(0.144 \pm 0.006)}$		$\frac{3.70 \pm 0.10}{(0.146 \pm 0.004)}$
B <sub>0</sub>	$\frac{4.93 \pm 0.10}{(0.194 \pm 0.004)}$		$\frac{4.98 \pm 0.15}{(0.196 \pm 0.006)}$		$\frac{5.10 \pm 0.10}{(0.201 \pm 0.004)}$
B <sub>1</sub> max.	$\frac{5.90}{(0.232)}$				
D <sub>0</sub>	$\frac{1.50 +0.10/-0}{(0.059 +0.004/-0)}$				
F	$\frac{5.50 \pm 0.05}{(0.217 \pm 0.002)}$				
E <sub>1</sub>	$\frac{1.75 \pm 0.10}{(0.069 \pm 0.004)}$				
E <sub>2</sub> typ.	$\frac{10.25}{(0.404)}$				
T max.	$\frac{0.60}{(0.024)}$				
T <sub>1</sub> max.	$\frac{0.10}{(0.004)}$				
K <sub>0</sub>	$\frac{1.30 \pm 0.10}{(0.051 \pm 0.004)}$		$\frac{0.95 \pm 0.10}{(0.037 \pm 0.004)}$		$\frac{1.50 \pm 0.10}{(0.059 \pm 0.004)}$
Leader min.	$\frac{390}{(15.4)}$				
Trailer min.	$\frac{160}{(6.3)}$				
<b>Reel Dimensions</b>					
A max.	$\frac{185}{(7.3)}$				
N min.	$\frac{50}{(2.0)}$				
W <sub>1</sub>	$\frac{12.4 +2.0/-0}{(0.49 +0.08/-0)}$				
W <sub>2</sub> max.	$\frac{18.4}{(0.72)}$				

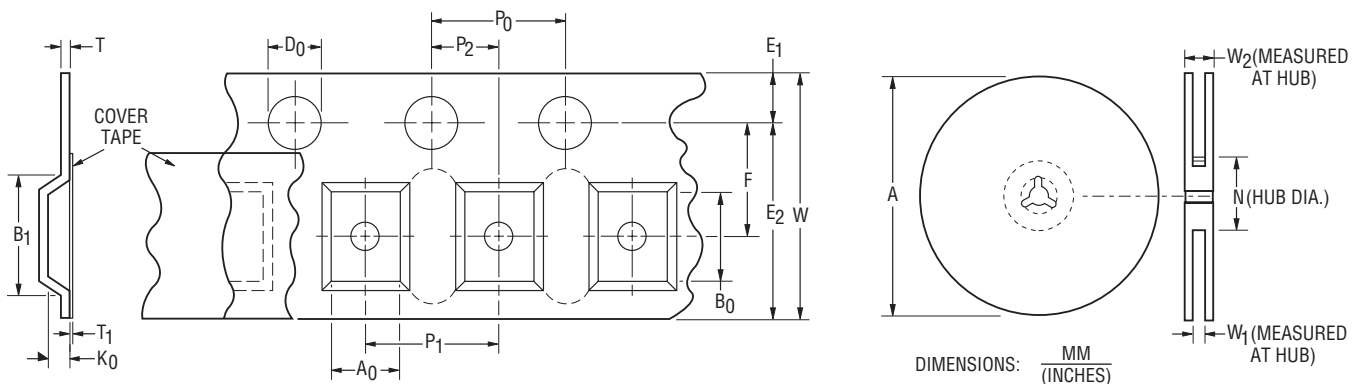

MF-MSMF SERIES, REV. AW, 12/23

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

**Application Notice**

- Users are responsible for independent and adequate evaluation of Bourns® Multifuse® Polymer PTC devices in the user's application, including the PPTC device characteristics stated in the applicable data sheet.
- Polymer PTC devices must not be allowed to operate beyond their stated maximum ratings. Operation in excess of such maximum ratings could result in damage to the PTC device and possibly lead to electrical arcing and/or fire. Circuits with inductance may generate a voltage above the rated voltage of the polymer PTC device and should be thoroughly evaluated within the user's application during the PTC selection and qualification process.
- Polymer PTC devices are intended to protect against adverse effects of temporary overcurrent or overtemperature conditions up to rated limits and are not intended to serve as protective devices where overcurrent or overvoltage conditions are expected to be repetitive or prolonged.
- In normal operation, polymer PTC devices experience thermal expansion under fault conditions. Thus, a polymer PTC device must be protected against mechanical stress, and must be given adequate clearance within the user's application to accommodate such thermal expansion. Rigid potting materials or fixed housings or coverings that do not provide adequate clearance should be thoroughly examined and tested by the user, as they may result in the malfunction of polymer PTC devices if the thermal expansion is inhibited.
- Exposure to lubricants, silicon-based oils, solvents, gels, electrolytes, acids, and other related or similar materials may adversely affect the performance of polymer PTC devices.
- Aggressive solvents may adversely affect the performance of polymer PTC devices. Conformal coating, encapsulating, potting, molding, and sealing materials may contain aggressive solvents including but not limited to xylene and toluene, which are known to cause adverse effects on the performance of polymer PTCs. Such aggressive solvents must be thoroughly cured or baked to ensure their complete removal from polymer PTCs to minimize the possible adverse effect on the device.
- Recommended storage conditions should be followed at all times. Such conditions can be found on the applicable data sheet and on the Multifuse® Polymer PTC Moisture/Reflow Sensitivity Classification (MSL) note:  
[https://www.bourns.com/docs/RoHS-MSL/msl\\_mf.pdf](https://www.bourns.com/docs/RoHS-MSL/msl_mf.pdf)