



Features

- Surface mount devices
- High voltage surge capabilities
- Binned and sorted resistance ranges
- Assists in meeting ITU K.20/K.21 specifications
- RoHS compliant*
- Agency recognition:  

Applications

Used as a secondary overcurrent protection device in:

- Customer Premise Equipment (CPE)
- Central Office (CO)
- Subscriber Line Interface Cards (SLIC)

MF-SM/250 - Telecom PTC Resettable Fuses

Electrical Characteristics

| Model | Max. Operating Voltage | Max. Interrupt Ratings | | Hold Current | Initial Resistance | | One Hour Post-Trip Resistance | Tripped Power Dissipation |
|------------------|------------------------|------------------------|----------|----------------|--------------------|---------------|-------------------------------|---------------------------|
| | Volts (V) | Volts (V) | Amps (A) | Amps at 23 °C | Ohms at 23 °C | Ohms at 23 °C | Ohms at 23 °C | Watts at 23 °C |
| | | Max. | Max. | I _H | Min. | Max. | Max. | Typ. |
| MF-SM008/250F-2 | 80 | 250 | 3.0 | 0.08 | 5.0 | 11.0 | 20.0 | 1.5 |
| MF-SM013/250-2 | 60 | 250 | 3.0 | 0.13 | 6.5 | 12.0 | 20.0 | 3.3 |
| MF-SM013/250-A-2 | 60 | 250 | 3.0 | 0.13 | 6.5 | 9.0 | 20.0 | 3.3 |
| MF-SM013/250-B-2 | 60 | 250 | 3.0 | 0.13 | 9.0 | 12.0 | 20.0 | 3.3 |
| MF-SM013/250-C-2 | 60 | 250 | 3.0 | 0.13 | 7.0 | 10.0 | 20.0 | 3.3 |

Environmental Characteristics

| | |
|--|---|
| Operating Temperature..... | -40 °C to +85 °C |
| Maximum Device Surface Temperature | |
| in Tripped State | 125 °C |
| Passive Aging | +85 °C, 1000 hours..... ±15 % typical resistance change |
| Humidity Aging..... | +85 °C, 85 % R.H. 1000 hours..... ±15 % typical resistance change |
| Thermal Shock | MIL-STD-202F, Method 107G..... ±15 % typical resistance change |
| | +125 °C to -55 °C, 10 times..... ±15 % typical resistance change |
| Solvent Resistance..... | MIL-STD-202, Method 215B..... No change |
| Lead Solderability | ANSI/J-STD-002 |
| Vibration | MIL-STD-883C, Method 2007.1, Condition A..... No change |
| Moisture Sensitivity Level (MSL) | Level 1 |
| ESD Classification - HBM..... | Class 6 |

Test Procedures And Requirements For Model MF-SM/250 Series

| Test | Test Conditions | Accept/Reject Criteria |
|----------------------|---|---|
| Visual/Mech..... | Verify dimensions and materials..... | Per MF physical description |
| Resistance..... | In still air @ 23 °C..... | R _{min} ≤ R ≤ R _{max} |
| Time to Trip..... | At specified current, V _{max} , 23 °C..... | T ≤ max. time to trip (seconds) |
| Hold Current..... | 30 min. at I _{hold} | No trip |
| Trip Cycle Life..... | V _{max} , I _{max} , 100 cycles..... | No arcing or burning |
| Trip Endurance..... | V _{max} , 48 hours..... | No arcing or burning |
| Solderability..... | MIL-STD-202F, Method 208F..... | 95 % min. coverage |
| UL File Number | E174545 | |
| TÜV File Number | | |
| MF-SM008/250-2..... | R50118917 | |
| MF-SM013/250-2..... | R2057213 | |

Thermal Derating Chart - I_{hold}/ I_{trip} (Amps)

| Model | Ambient Operating Temperature | | | | | | | | |
|------------------|-------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| | -40 °C | -20 °C | 0 °C | 23 °C | 40 °C | 50 °C | 60 °C | 70 °C | 85 °C |
| MF-SM008/250-2 | 0.124 / 0.34 | 0.110 / 0.30 | 0.095 / 0.26 | 0.080 / 0.22 | 0.066 / 0.18 | 0.059 / 0.16 | 0.051 / 0.14 | 0.044 / 0.12 | 0.033 / 0.09 |
| MF-SM013/250-2 | 0.21 / 0.42 | 0.18 / 0.37 | 0.16 / 0.31 | 0.13 / 0.26 | 0.10 / 0.23 | 0.09 / 0.18 | 0.08 / 0.15 | 0.07 / 0.12 | 0.05 / 0.10 |
| MF-SM013/250-A-2 | 0.21 / 0.42 | 0.18 / 0.37 | 0.16 / 0.31 | 0.13 / 0.26 | 0.10 / 0.23 | 0.09 / 0.18 | 0.08 / 0.15 | 0.07 / 0.12 | 0.05 / 0.10 |
| MF-SM013/250-B-2 | 0.21 / 0.42 | 0.18 / 0.37 | 0.16 / 0.31 | 0.13 / 0.26 | 0.10 / 0.23 | 0.09 / 0.18 | 0.08 / 0.15 | 0.07 / 0.12 | 0.05 / 0.10 |
| MF-SM013/250-C-2 | 0.21 / 0.42 | 0.18 / 0.37 | 0.16 / 0.31 | 0.13 / 0.26 | 0.10 / 0.23 | 0.09 / 0.18 | 0.08 / 0.15 | 0.07 / 0.12 | 0.05 / 0.10 |



WARNING Cancer and Reproductive Harm - www.P65Warnings.ca.gov

*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011. Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

Additional Features

- Withstands lightning power induction

MF-SM/250 - Telecom PTC Resettable Fuses

BOURNS®




Product Dimensions

| Model | A Max. | B Max. | C Max. | D Nom. | E Nom. | G Nom. | H Nom. | I Nom. |
|------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| MF-SM008/250-2 | $\frac{7.9}{(0.311)}$ | $\frac{3.7}{(0.146)}$ | $\frac{5.3}{(0.209)}$ | $\frac{0.3}{(0.012)}$ | $\frac{3.8}{(0.149)}$ | $\frac{9.7}{(0.383)}$ | $\frac{3.1}{(0.122)}$ | $\frac{2.3}{(0.091)}$ |
| MF-SM013/250-2 | $\frac{9.4}{(0.370)}$ | $\frac{3.7}{(0.146)}$ | $\frac{7.4}{(0.291)}$ | $\frac{0.3}{(0.012)}$ | $\frac{3.8}{(0.149)}$ | $\frac{9.7}{(0.383)}$ | $\frac{4.6}{(0.18)}$ | $\frac{1.8}{(0.071)}$ |
| MF-SM013/250-A-2 | $\frac{9.4}{(0.370)}$ | $\frac{3.7}{(0.146)}$ | $\frac{7.4}{(0.291)}$ | $\frac{0.3}{(0.012)}$ | $\frac{3.8}{(0.149)}$ | $\frac{9.7}{(0.383)}$ | $\frac{4.6}{(0.18)}$ | $\frac{1.8}{(0.071)}$ |
| MF-SM013/250-B-2 | $\frac{9.4}{(0.370)}$ | $\frac{3.7}{(0.146)}$ | $\frac{7.4}{(0.291)}$ | $\frac{0.3}{(0.012)}$ | $\frac{3.8}{(0.149)}$ | $\frac{9.7}{(0.383)}$ | $\frac{4.6}{(0.18)}$ | $\frac{1.8}{(0.071)}$ |
| MF-SM013/250-C-2 | $\frac{9.4}{(0.370)}$ | $\frac{3.7}{(0.146)}$ | $\frac{7.4}{(0.291)}$ | $\frac{0.3}{(0.012)}$ | $\frac{3.8}{(0.149)}$ | $\frac{9.7}{(0.383)}$ | $\frac{4.6}{(0.18)}$ | $\frac{1.8}{(0.071)}$ |


Packaging:
TAPE & REEL: 1500 pcs. per reel

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$


Recommended Pad Layout

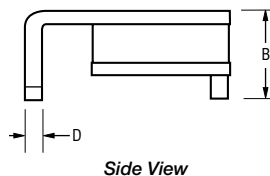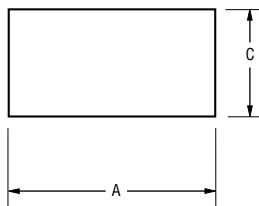

Terminal material:
Tin-plated brass



Solder Reflow Recommendations

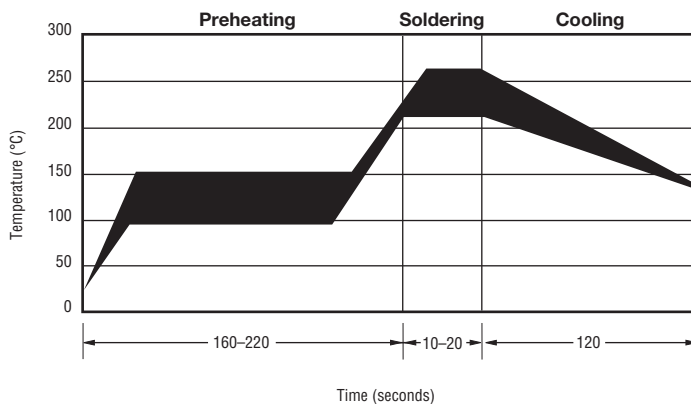

Solder reflow

- Recommended reflow methods: IR, vapor phase oven, hot air oven.
- Devices are not designed to be wave soldered to the bottom side of the board.
- Gluing the devices is not recommended.
- Recommended maximum paste thickness is 0.25 mm (.010 inch).
- Devices can be cleaned using standard industry methods and solvents.

Note:

- If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

Rework

- A device should not be reworked.

Storage Recommendations

The recommended long term storage conditions for Multifuse® Polymer PTC devices are 40 °C maximum and 70 % RH maximum. All devices should remain in the original sealed packaging prior to use. Devices may not conform with data sheet specifications if these storage recommendations are exceeded. Devices stored in this manner have an indefinite shelf life.


Specifications are subject to change without notice.
Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

MF-SM/250 - Telecom PTC Resettable Fuses




Typical Time to Trip at 23 °C

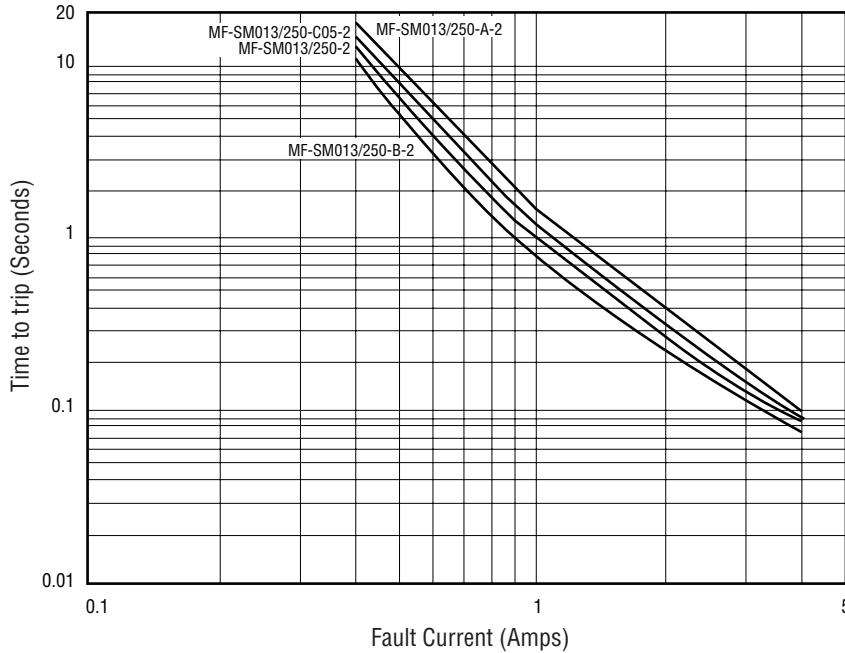


Typical Part Marking

Represents total content. Layout may vary.

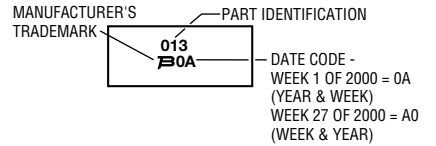

How to Order

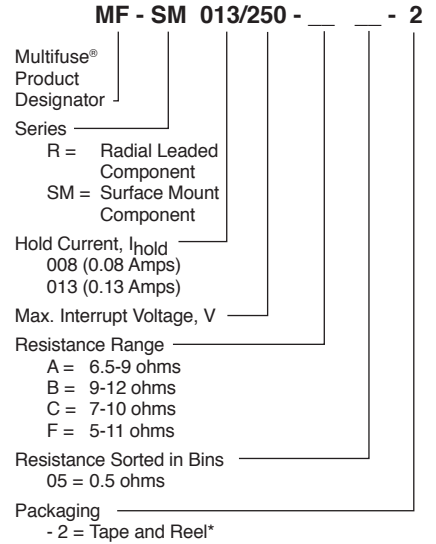

*Packaged per EIA486-B

NOTE: All parts are also available "binned". All parts within a package will be within 0.5 ohms of each other within the initial resistance range.

MF-SM, MF-SM/33, MF-SM/60 & MF-SM/250 Series Tape and Reel Specifications




NOTE: Effective December 1, 2010 (product date code V0), the cover tape was changed to the new 3M™ Universal Cover Tape (UCT).

| Tape Dimensions | MF-SM030, 050, 075, 100, 125, 260, 300; MF-SM075/60; MF-SM-100/33; MF-SM008/250 per EIA-481-2 | MF-SM150, 200, 250; MF-SM-150/33, MF-SM-185/33; MF-SM013/250 per EIA 481-2 |
|------------------------|---|--|
| | W max. | 16.3 (0.642) |
| P ₀ | 4.0 ± 0.1 (0.157 ± 0.004) | 4.0 ± 0.1 (0.157 ± 0.004) |
| P ₁ | 8.0 ± 0.1 (0.315 ± 0.004) | 12.0 ± 0.1 (0.472 ± 0.004) |
| P ₂ | 2.0 ± 0.1 (0.079 ± 0.004) | 2.0 ± 0.1 (0.079 ± 0.004) |
| A ₀ | 5.7 ± 0.1 (0.224 ± 0.004) | 6.9 ± 0.1 (0.272 ± 0.004) |
| B ₀ | 8.1 ± 0.1 (0.319 ± 0.004) | 9.6 ± 0.1 (0.378 ± 0.004) |
| B ₁ max. | 12.1 (0.476) | 12.1 (0.476) |
| D ₀ | 1.5 + 0.1/-0.0 (0.059 + 0.004/-0) | 1.5 + 0.1/-0.0 (0.059 + 0.004/-0) |
| F | 7.5 ± 0.1 (0.295 ± 0.004) | 7.5 ± 0.1 (0.295 ± 0.004) |
| E ₁ | 1.75 ± 0.1 (0.069 ± 0.004) | 1.75 ± 0.1 (0.069 ± 0.004) |
| E ₂ min. | 14.25 (0.561) | 14.25 (0.561) |
| T max. | 0.6 (0.024) | 0.6 (0.024) |
| T ₁ max. | 0.1 (0.004) | 0.1 (0.004) |
| K ₀ | 3.4 ± 0.1 (0.134 ± 0.004) | 3.4 ± 0.1* (0.134 ± 0.004)* |
| Leader min. | 390 (15.35) | 390 (15.35) |
| Trailer min. | 160 (6.30) | 160 (6.30) |
| Reel Dimensions | | |
| A max. | 360 (14.17) | 360 (14.17) |
| N min. | 50 (1.97) | 50 (1.97) |
| W ₁ | 16.4 + 2.0/-0.0 (0.646 + 0.079/-0) | 16.4 + 2.0/-0.0 (0.646 + 0.079/-0) |
| W ₂ max. | 22.4 (0.882) | 22.4 (0.882) |

* Model MF-SM013/250 = $\frac{3.8 \pm 0.1}{(0.150 \pm 0.004)}$

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

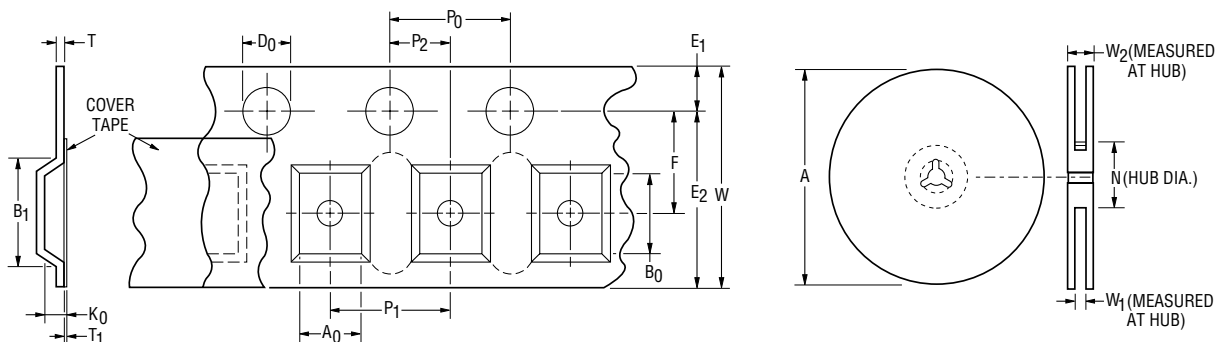

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.