

# MFBW1V3216

## Multilayer chip ferrite bead



### Product features

- 1206 (3216 metric) package
- High impedance values
- Multilayer monolithic construction yields high reliability
- Impedance range from 0  $\Omega$  to 2000  $\Omega$

### Applications

- Industrial connectivity (IoT)
- Wireless communications
- Bluetooth
- WiFi
- Antenna
- Machine-to-machine (M2M)
- Mobile phones
- Wearable devices
- Wireless LAN
- Computing/gaming consoles
- Broadband components
- RF transceiver modules

### Environmental compliance and general specifications

- Operating temperature range: -40 °C to +85 °C (ambient plus self-temperature rise)



**Product specifications**

Part number <sup>3</sup>	Impedance tolerance	Impedance (Ω)	DCR (Ω) maximum @ +25 °C	Test frequency <sup>1</sup> (MHz)	Test voltage <sup>1</sup> (mV)	Rated I <sup>2</sup> (mA) maximum
MFBW1V3216-000-R	0~15 Ω	0	0.04	100	50	4000
MFBW1V3216-050-R	0~15 Ω	5	0.04	100	50	4000
MFBW1V3216-070-R	0~11 Ω	7	0.04	100	50	4000
MFBW1V3216-090-R	5~13 Ω	9	0.05	100	50	4000
MFBW1V3216-110-R	7~15 Ω	11	0.05	100	50	4000
MFBW1V3216-150-R	9~21 Ω	15	0.05	100	50	3000
MFBW1V3216-190-R	12~25 Ω	19	0.05	100	50	3000
MFBW1V3216-260-R	±25%	26	0.05	100	50	3000
MFBW1V3216-280-R	±25%	28	0.07	100	50	3000
MFBW1V3216-300-R	±25%	30	0.07	100	50	3000
MFBW1V3216-310-R	±25%	31	0.07	100	50	3000
MFBW1V3216-500-R	±25%	50	0.07	100	50	3000
MFBW1V3216-600-R	±25%	60	0.07	100	50	3000
MFBW1V3216-700-R	±25%	70	0.07	100	50	3000
MFBW1V3216-800-R	±25%	80	0.07	100	50	3000
MFBW1V3216-101-R	±25%	100	0.07	100	50	3000
MFBW1V3216-121-R	±25%	120	0.07	100	50	3000
MFBW1V3216-151-R	±25%	150	0.12	100	50	2500
MFBW1V3216-181-R	±25%	180	0.12	100	50	2500
MFBW1V3216-221-R	±25%	220	0.12	100	50	2500
MFBW1V3216-301-R	±25%	300	0.15	100	50	2000
MFBW1V3216-501-R	±25%	500	0.20	100	50	2000
MFBW1V3216-601-R	±25%	600	0.20	100	50	2000
MFBW1V3216-801-R	±25%	800	0.25	100	50	2000
MFBW1V3216-102-R	±25%	1000	0.25	100	50	2000
MFBW1V3216-122-R	±25%	1200	0.35	100	50	1000
MFBW1V3216-152-R	±25%	1500	0.45	100	50	500
MFBW1V3216-182-R	±25%	1800	0.60	100	50	500
MFBW1V3216-202-R	±25%	2000	0.70	100	50	300

1. Impedance test frequency and voltage.

2. Rated I: Current rating for an approximate self-temperature rise of 40 °C or less.


3. Part number definition: MFBW1V3216-xxx-R

MFBW1V3216 = Product code and size

xxx = Impedance value in Ω, last character equals number of zeros

-R suffix = RoHS compliant

**Mechanical parameters, schematic, pad layout (mm)**

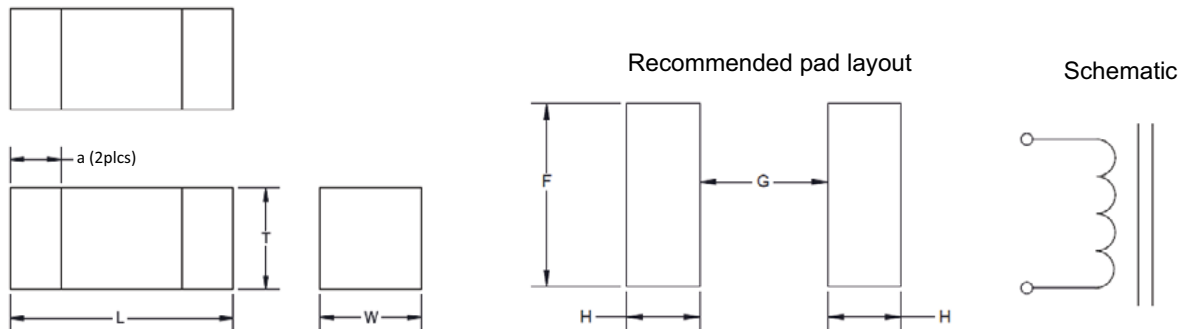


Part number	L	W	T	a	F	G	H
MFBW1V3216-xxx-R	3.2 ±0.20	1.6 ±0.20	0.9 ±0.20	0.5 ±0.3	2.00 ref	1.40 ref	1.20 ref

Part marking: No marking  
 All soldering surfaces to be coplanar within 0.1 millimeters  
 Tolerances are ±0.1 millimeters unless stated otherwise  
 Pad layout dimensions are reference only  
 Traces or vias underneath the inductor is not recommended

**Packaging information (mm)**

Drawing not to scale  
 Supplied in tape and reel packaging, 4000 parts per 7" diameter reel

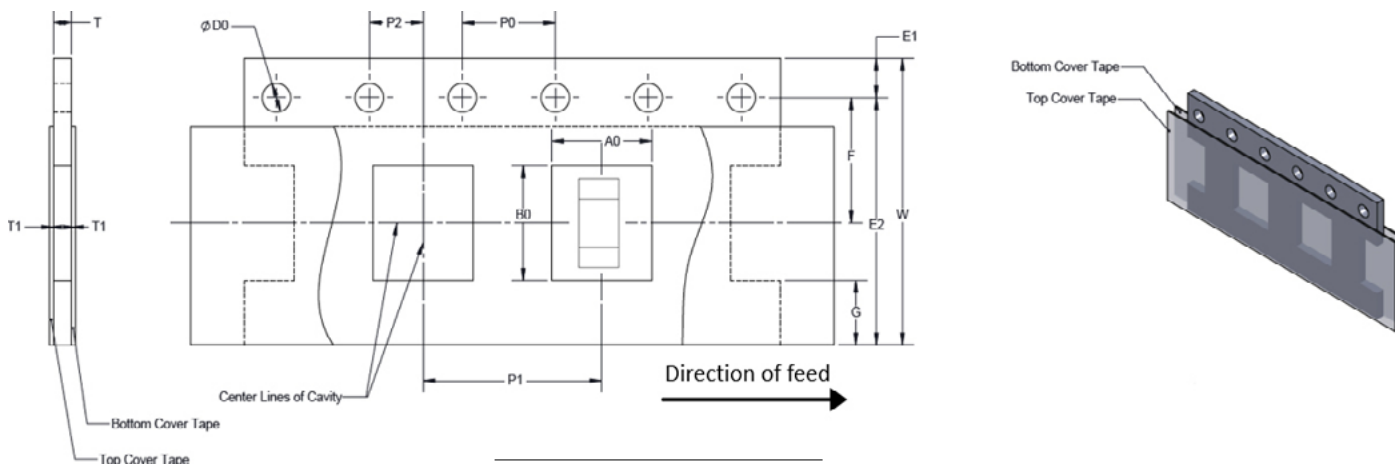


W±0.2	8.00
F±0.1	3.50
E1±0.2	1.75
E2 Min	na
P0±0.2	4.00
P1±0.2	4.00
P2±0.1	2.00
D0±0.1	1.55
A0	1.9±0.2
B0	3.5±0.2
T	0.95±0.1
T1 Max	na

**Qualification testing**


No.	Test item	Sample size (pcs)	Test condition	Acceptable value/range
1	External visual	72	Specification	No physical damage
2	Physical dimension	72	Specification	Specification
3	Initial electrical test	72	Specification	User specification
4	Solderability	6	+245 °C ±5 °C, dipping 5 ±1s	>95% solder coverage
5	Resistance to soldering heat	6	+260 ±5 °C for 10 ±1 s	1. $\Delta Z/Z < \pm 30\%$ 2. No physical damage
6	Terminal strength (SMD)	6	Force of 10 N for 10 ±1 s	No physical damage No electrical performance test
7	Low temperature exposure	6	-40 °C for 1000 hours	1. $\Delta Z/Z < \pm 30\%$ 2. No physical damage
8	Bending strength	6	Appendix 2 note: 2 mm, hold time 30 s (minimum)	No physical damage No electrical performance test
9	Drop	6	Drop 10 times to a concrete floor from a height of 1 m	1. $\Delta Z/Z < \pm 30\%$ 2. No physical damage
10	Vibration	6	Amplitude modulation: 1.5 mm Test time: A period of 2 hours in each of 3 mutually perpendicular directions Test from 10 Hz to 55 Hz to 10 Hz for 1 minute	1. $\Delta Z/Z < \pm 30\%$ 2. No physical damage
11	High temperature exposure	6	+85 °C for 1000 hours	1. $\Delta Z/Z < \pm 30\%$ 2. No physical damage
12	Biased humidity	6	1000 hours +60 °C/90% to 95% RH unpowered	1. $\Delta Z/Z < \pm 30\%$ 2. No physical damage
13	Operational life	12	+85 °C at rated current for 1000 hours	1. $\Delta Z/Z < \pm 30\%$ 2. No physical damage
14	Temperature cycling	6	32 cycles (-40 °C to +85 °C), dwell time 30 minutes	1. $\Delta Z/Z < \pm 30\%$ 2. No physical damage

Impedance vs frequency


MFBW1V3216-000-R

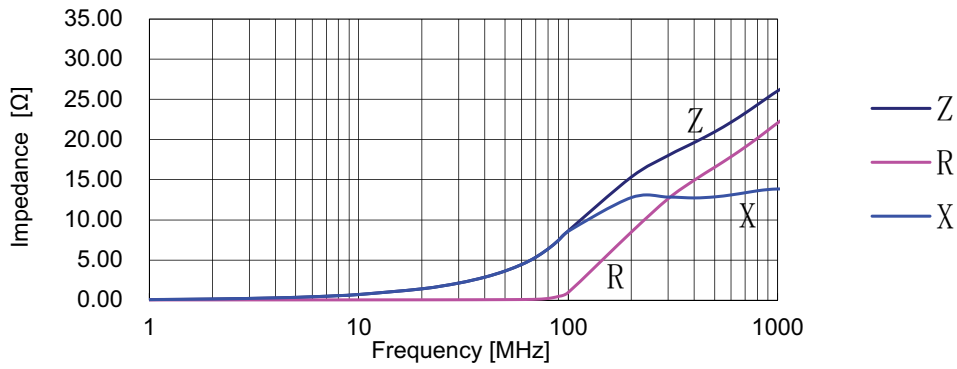

MFBW1V3216-800-R

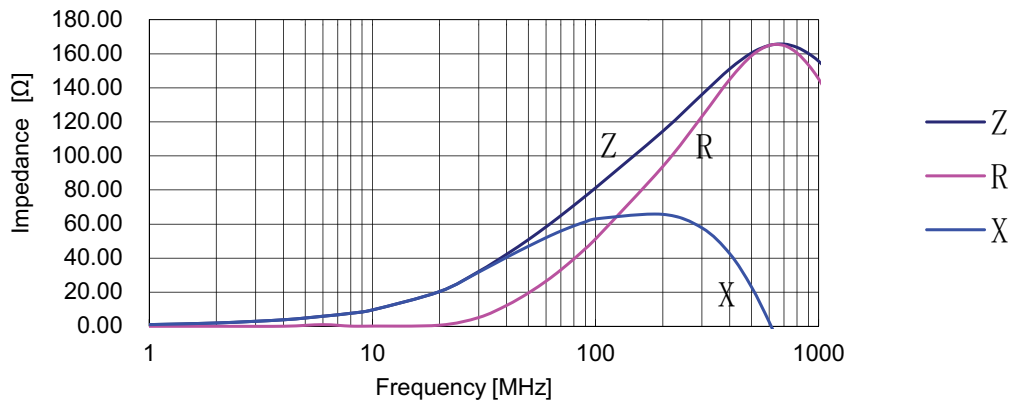

MFBW1V3216-202-R

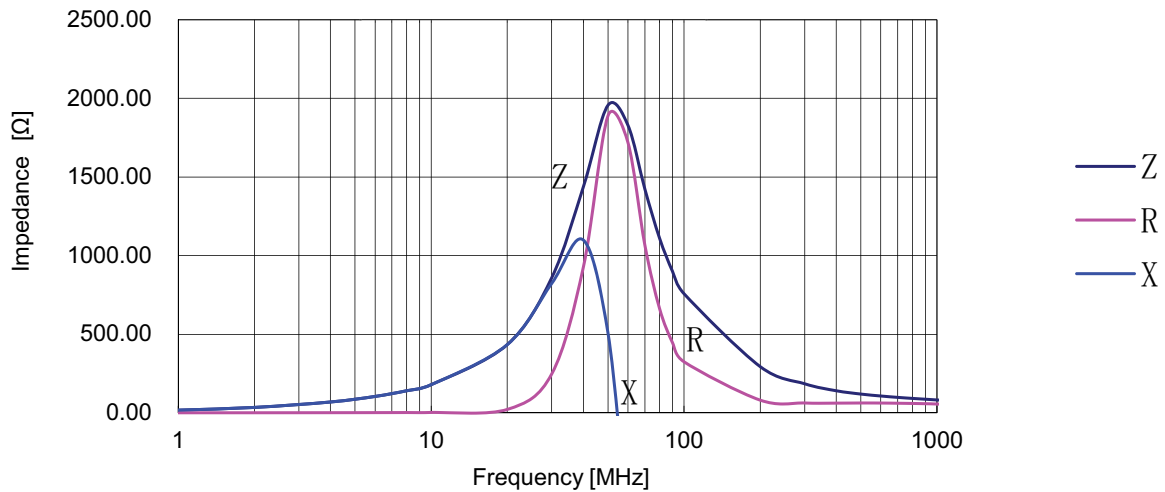

Z= impedance, R= resistance, X= reactance