

Application Manual

RV-3028-C7

Extreme Low Power Real-Time Clock Module with I²C-Bus Interface

TABLE OF CONTENTS

1. OVERVIEW	6
1.1. GENERAL DESCRIPTION.....	6
1.2. APPLICATIONS.....	7
1.3. ORDERING INFORMATION.....	7
2. BLOCK DIAGRAM.....	8
2.1. PINOUT.....	9
2.2. PIN DESCRIPTION.....	9
2.3. FUNCTIONAL DESCRIPTION.....	10
2.4. DEVICE PROTECTION DIAGRAM.....	10
3. REGISTER ORGANIZATION.....	11
3.1. REGISTER CONVENTIONS.....	11
3.2. REGISTER OVERVIEW.....	12
3.3. CLOCK REGISTERS.....	14
3.4. CALENDAR REGISTERS.....	15
3.5. ALARM REGISTERS.....	17
3.6. PERIODIC COUNTDOWN TIMER CONTROL REGISTERS.....	19
3.7. CONFIGURATION REGISTERS.....	21
3.8. EVENT CONTROL REGISTER.....	25
3.9. TIME STAMP REGISTERS.....	26
3.10. UNIX TIME REGISTERS.....	29
3.11. RAM REGISTERS.....	30
3.12. PASSWORD REGISTERS.....	31
3.13. EEPROM MEMORY CONTROL REGISTERS.....	32
3.14. ID REGISTER.....	33
3.15. CONFIGURATION EEPROM WITH RAM MIRROR REGISTERS.....	33
3.15.1. EEPROM RESERVED.....	33
3.15.2. EEPROM PASSWORD ENABLE REGISTER.....	33
3.15.3. EEPROM PASSWORD REGISTERS.....	34
3.15.4. EEPROM CLKOUT REGISTER.....	35
3.15.5. EEPROM OFFSET REGISTER.....	36
3.15.6. EEPROM BACKUP REGISTER.....	37
3.16. USER EEPROM.....	38
3.17. MANUFACTURER EEPROM.....	38
3.18. REGISTER RESET VALUES SUMMARY.....	39
4. DETAILED FUNCTIONAL DESCRIPTION.....	42
4.1. POWER ON RESET (POR).....	42
4.2. AUTOMATIC BACKUP SWITCHOVER FUNCTION.....	43
4.2.1. SWITCHOVER DISABLED.....	43

4.2.2. DIRECT SWITCHING MODE (DSM)	44
4.2.3. STANDBY MODE	45
4.2.4. LEVEL SWITCHING MODE (LSM)	45
4.3. TRICKLE CHARGER	46
4.4. PROGRAMMABLE CLOCK OUTPUT	46
4.4.1. CLKOUT FREQUENCY SELECTION	47
4.4.2. NORMAL CLOCK OUTPUT	47
4.4.3. INTERRUPT CONTROLLED CLOCK OUTPUT	47
4.4.4. SYNCHRONIZED ENABLE/DISABLE	48
4.4.5. CLOCK OUTPUT SCHEME	49
4.5. SETTING AND READING THE TIME	50
4.5.1. SETTING THE TIME	51
4.5.2. READING THE TIME	51
4.6. EEPROM READ/WRITE	52
4.6.1. POR REFRESH (ALL CONFIGURATION EEPROM → RAM)	52
4.6.2. AUTOMATIC REFRESH (ALL CONFIGURATION EEPROM → RAM)	52
4.6.3. REFRESH (ALL CONFIGURATION EEPROM → RAM)	52
4.6.4. UPDATE (ALL CONFIGURATION RAM → EEPROM)	52
4.6.5. READ ONE EEPROM BYTE (EEPROM → RAM-EEdata)	52
4.6.6. WRITE TO ONE EEPROM BYTE (RAM-EEdata → EEPROM)	52
4.6.7. EEBUSY BIT	54
4.6.8. EEPROM READ/WRITE CONDITIONS	55
4.7. USE OF THE CONFIGURATION EEPROM WITH RAM MIRROR REGISTERS	55
4.8. INTERRUPT OUTPUT	56
4.8.1. SERVICING INTERRUPTS	56
4.8.2. INTERRUPT SCHEME	57
4.9. PERIODIC COUNTDOWN TIMER INTERRUPT FUNCTION	59
4.9.1. PERIODIC COUNTDOWN TIMER DIAGRAM	60
4.9.2. USE OF THE PERIODIC COUNTDOWN TIMER INTERRUPT	61
4.9.3. FIRST PERIOD DURATION	63
4.10. PERIODIC TIME UPDATE INTERRUPT FUNCTION	64
4.10.1. PERIODIC TIME UPDATE DIAGRAM	64
4.10.2. USE OF THE PERIODIC TIME UPDATE INTERRUPT	65
4.11. ALARM INTERRUPT FUNCTION	66
4.11.1. ALARM DIAGRAM	66
4.11.2. USE OF THE ALARM INTERRUPT	67
4.12. EXTERNAL EVENT FUNCTION	68
4.12.1. EXTERNAL EVENT DIAGRAM	69
4.12.2. USE OF THE EXTERNAL EVENT FUNCTION	70

4.13. AUTOMATIC BACKUP SWITCHOVER INTERRUPT FUNCTION	72
4.13.1. AUTOMATIC BACKUP SWITCHOVER DIAGRAM.....	73
4.13.2. USE OF THE AUTOMATIC BACKUP SWITCHOVER INTERRUPT	74
4.14. POWER ON RESET INTERRUPT FUNCTION	75
4.14.1. POWER ON RESET DIAGRAM	75
4.14.2. USE OF THE POWER ON RESET INTERRUPT	76
4.15. TIME STAMP FUNCTION	77
4.16. FREQUENCY OFFSET CORRECTION	79
4.16.1. EEOFFSET VALUE DETERMINATION.....	79
4.16.2. VERIFICATION OF THE CORRECTED TIME ACCURACY	79
4.17. UNIX TIME COUNTER	80
4.18. RESET BIT FUNCTION	81
4.19. USER PROGRAMMABLE PASSWORD	82
4.19.1. ENABLING/DISABLING WRITE PROTECTION	82
4.19.2. CHANGING PASSWORD	83
4.19.3. FLOWCHART	84
5. I²C INTERFACE	85
5.1. BIT TRANSFER	85
5.2. START AND STOP CONDITIONS	85
5.3. DATA VALID	86
5.4. SYSTEM CONFIGURATION	86
5.5. ACKNOWLEDGE	87
5.6. SLAVE ADDRESS	88
5.7. WRITE OPERATION	88
5.8. READ OPERATION AT SPECIFIC ADDRESS	89
5.9. READ OPERATION	89
5.10. I²C-BUS IN SWITCHOVER CONDITION	90
6. ELECTRICAL SPECIFICATIONS	91
6.1. ABSOLUTE MAXIMUM RATINGS	91
6.2. OPERATING PARAMETERS	92
6.3. OSCILLATOR PARAMETERS	94
6.3.1. XTAL FREQUENCY VS. TEMPERATURE CHARACTERISTICS	94
6.4. POWER ON AC ELECTRICAL CHARACTERISTICS	95
6.5. I²C-BUS CHARACTERISTICS	96
7. TYPICAL APPLICATION CIRCUIT	97
7.1. OPERATING RV-3028-C7 WITH BACKUP SUPPLY VOLTAGE	97
8. PACKAGE	98
8.1. DIMENSIONS AND SOLDER PAD LAYOUT	98
8.1.1. RECOMMENDED THERMAL RELIEF	98

8.2. MARKING AND PIN #1 INDEX.....	99
9. MATERIAL COMPOSITION DECLARATION & ENVIRONMENTAL INFORMATION	100
9.1. HOMOGENOUS MATERIAL COMPOSITION DECLARATION	100
9.2. MATERIAL ANALYSIS & TEST RESULTS	101
9.3. RECYCLING MATERIAL INFORMATION	102
9.4. ENVIRONMENTAL PROPERTIES & ABSOLUTE MAXIMUM RATINGS	103
10. SOLDERING INFORMATION.....	104
11. HANDLING PRECAUTIONS FOR MODULES WITH EMBEDDED CRYSTALS	105
12. PACKING & SHIPPING INFORMATION.....	106
13. COMPLIANCE INFORMATION	107
14. DOCUMENT REVISION HISTORY.....	107

RV-3028-C7

Extreme Low Power Real-Time Clock Module with I²C-Bus Interface

1. OVERVIEW

- RTC module with built-in “Tuning Fork” crystal oscillating at 32.768 kHz
- Counters for seconds, minutes, hours, date, month, year and weekday
- 32-bit UNIX Time counter
- Automatic leap year correction: 2000 to 2099
- Aging compensation with non-volatile user programmable EEOffset value
- Periodic Countdown Timer Interrupt function; interrupt output also in VBACKUP Power state
- Periodic Time Update Interrupt function (seconds, minutes); interrupt output also in VBACKUP Power state
- Alarm Interrupts for weekday or date, hour and minute settings; interrupt output also in VBACKUP Power state
- External Event Input with Interrupt and Time Stamp function; interrupt output also in VBACKUP Power state
- Factory calibrated time accuracy: ± 1 ppm @ 25°C
- 32.768 kHz Xtal frequency accuracy: ± 5 ppm @ 25°C
- 43 bytes of non-volatile user memory EEPROM
- Configuration registers stored in EEPROM and mirrored in RAM
- User programmable password for write protection of the time and configuration registers
- I²C-bus interface (up to 400 kHz)
- Programmable Clock Output
 - Enable/disable by CLKOE bit
 - or enabling with Interrupt function
 - 32.768 kHz, 8192 Hz, 1024 Hz, 64 Hz, 32 Hz, 1 Hz or periodic countdown timer interrupt
 - Synchronized enable/disable selectable
- Automatic Backup switchover with Interrupt and Time Stamp function
- Internal Power On Reset (POR) with Interrupt function
- Trickle charger
- Wide interface operating voltage: 1.2 to 5.5 V
- Wide Timekeeping voltage range: 1.1 V to 5.5 V
- Extreme low current consumption: 40 nA ($V_{DD} = 3.0$ V, $T_A = 25^\circ\text{C}$)
- Operating temperature range: -40 to +85°C
- Ultra small and compact C7 package size, RoHS-compliant and 100% lead-free: 3.2 x 1.5 x 0.8 mm
- Automotive qualification according to AEC-Q200 available

1.1. GENERAL DESCRIPTION

The RV-3028-C7 is a CMOS real-time clock/calendar module with an automatic backup switchover circuit and is optimized for extreme low power consumption. It provides full RTC function with programmable counters, alarm, selectable interrupt and clock output functions and also a 32-bit UNIX Time counter. The internal EEPROM memory hosts all configuration settings and allows for additional user memory. An EEOffset value allows compensating the frequency deviation of the 32.768 kHz clock. All addresses and data are transferred over an I²C-bus interface for communication with a host controller. The Address Pointer is incremented automatically after each written or read data byte.

This ultra small RTC module has been specially designed for miniature and cost sensitive high volume applications.

1.2. APPLICATIONS

The RV-3028-C7 RTC module combines key functions with outstanding performance in an ultra small ceramic package:

- Extreme Low Power consumption
- Smallest RTC module (embedded XTAL) in an ultra-small 3.2 x 1.5 x 0.8 mm lead-free ceramic package

These unique features make this product perfectly suitable for many applications:

- Communication: IoT / Wearables / Wireless Sensors and Tags / Handsets
- Automotive: M2M / Navigation & Tracking Systems / Dashboard / Tachometers / Engine Controller
Car Audio & Entertainment Systems
- Metering: E-Meter / Heating Counter / Smart Meters / PV Converter/ Utility metering
- Outdoor: ATM & POS systems / Surveillance & Safety systems / Ticketing Systems
- Medical: Glucose Meter / Health Monitoring Systems
- Safety: Security & Camera Systems / Door Lock & Access Control / Tamper Detection
- Consumer: Gambling Machines / TV & Set Top Boxes / White Goods
- Automation: PLC / Data Logger / Home & Factory Automation / Industrial and Consumer Electronics


1.3. ORDERING INFORMATION

Example: RV-3028-C7 TA QC

Code	Operating temperature range
TA (Standard)	-40 to +85°C


Code	Qualification
QC (Standard)	Commercial Grade
QA	Automotive Grade AEC-Q200

2. BLOCK DIAGRAM

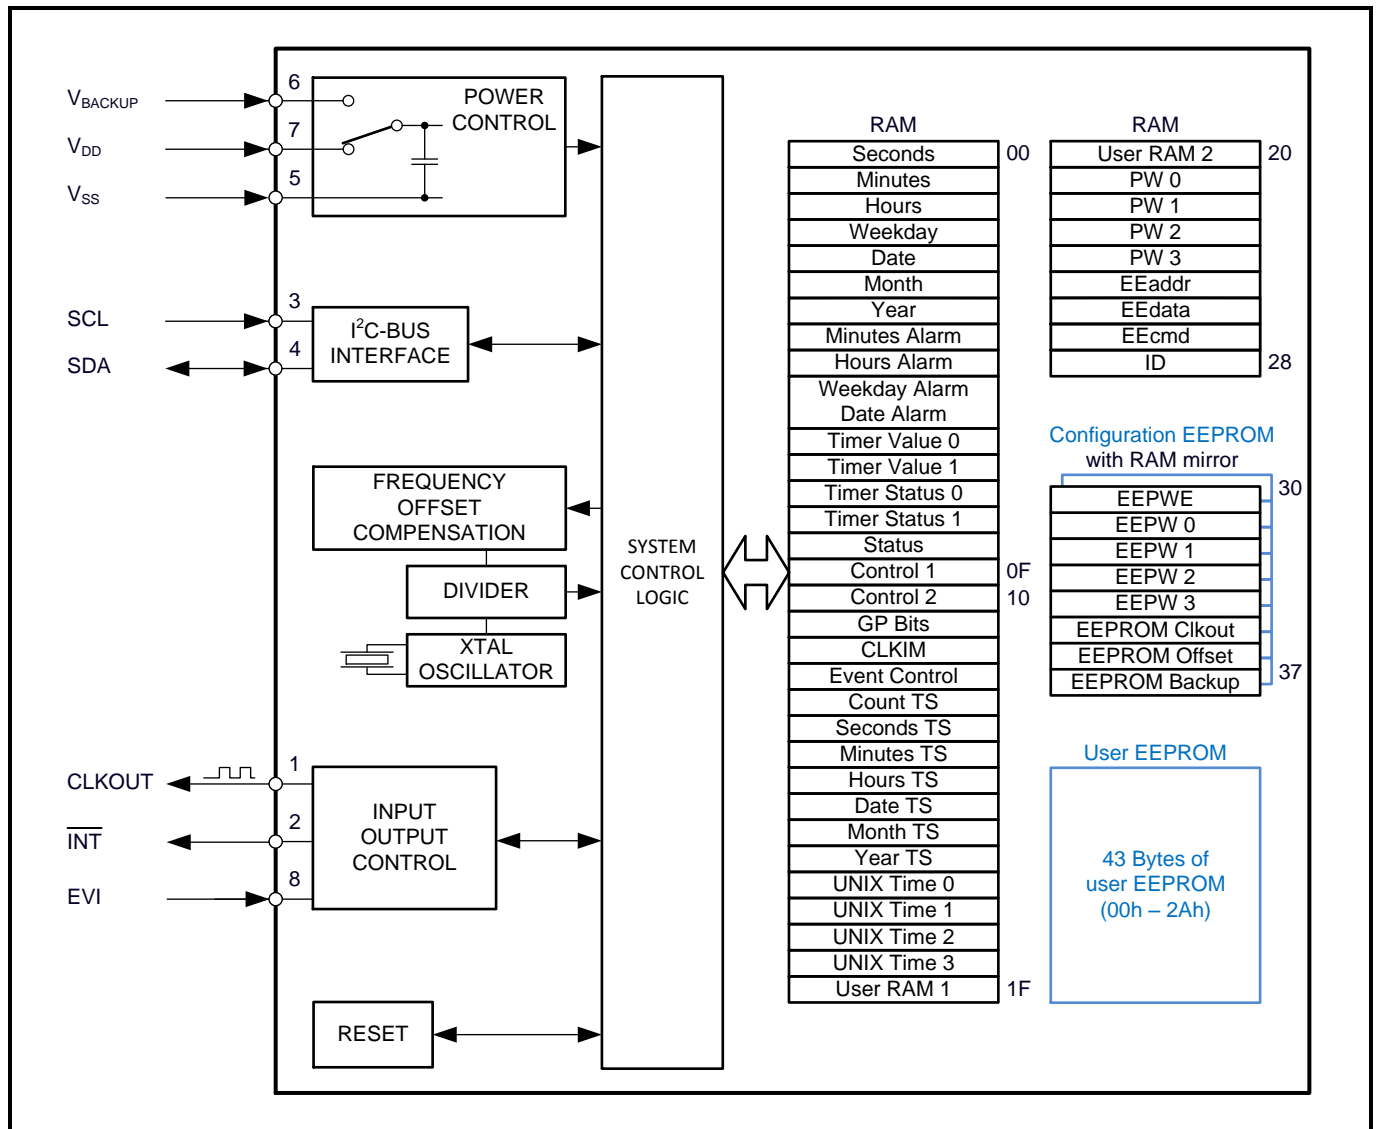

2.1. PINOUT

RV-C7 Package: (top view)

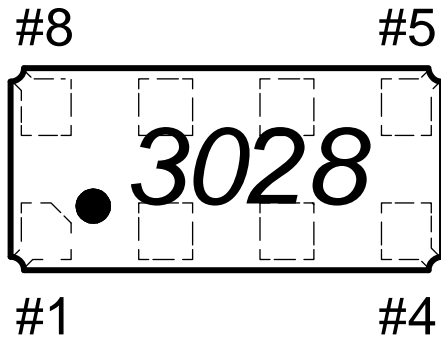

#1	CLKOUT
#2	$\overline{\text{INT}}$
#3	SCL
#4	SDA
#5	V_{SS}
#6	V_{BACKUP}
#7	V_{DD}
#8	EVI

2.2. PIN DESCRIPTION

Symbol	Pin #	Description
CLKOUT	1	<p>Clock Output; push-pull; Normal and Interrupt driven clock output can be activated concurrently.</p> <ol style="list-style-type: none"> Normal clock output is controlled by the CLKOE bit. When CLKOE is set to 1 (default), the CLKOUT pin drives the square wave on the CLKOUT pin. When CLKOE bit is set to 0, the CLKOUT pin is LOW. Interrupt driven clock output is controlled by an interrupt event. When CLKIE is set to 1 the occurrence of the interrupt selected in the Clock Interrupt Mask Register (12h) allows the square wave output on the CLKOUT pin. Writing 0 to CLKIE will disable new interrupts from driving square wave on CLKOUT. When CLKF flag is cleared, the CLKOUT pin is LOW. <p>Depending of the settings in the FD field, the CLKOUT pin can drive the square wave of 32.768 kHz (default), 8192 Hz, 1024 Hz, 64 Hz, 32 Hz or 1 Hz, or the predefined periodic countdown timer interrupt. When FD field is 111 the CLKOUT pin is LOW.</p> <p>When CLKS_Y bit set to 1, the enabling and disabling of the clock output is synchronized. CLKS_Y has no effect on the timer interrupt signal.</p> <p>In VBACKUP Power state, the CLKOUT pin is LOW.</p>
$\overline{\text{INT}}$	2	Interrupt Output; open-drain; active LOW; requires pull-up resistor; used to output Periodic Countdown Timer, Periodic Time Update, Alarm, External Event, Automatic Backup Switchover and Power On Reset Interrupt signals. Interrupt output also in VBACKUP Power state.
SCL	3	I ² C Serial Clock Input; requires pull-up resistor. In VBACKUP Power state, the SCL pin is disabled.
SDA	4	I ² C Serial Data Input-Output; open-drain; requires pull-up resistor. In VBACKUP Power state, the SDA pin is disabled (high impedance).
V_{SS}	5	Ground.
V_{BACKUP}	6	Backup Supply Voltage. When the backup switchover function is not needed, V_{BACKUP} must be tied to V_{SS} with a 10 k Ω resistor.
V_{DD}	7	Power Supply Voltage.
EVI	8	External Event Input; used for interrupt generation, interrupt driven clock output and time stamp function. Remains active also in VBACKUP Power state. This pin should not be left floating.


2.3. FUNCTIONAL DESCRIPTION

The RV-3028-C7 is an extreme-low power CMOS based Real-Time-Clock Module with embedded 32.768 kHz Crystal. It includes an Automatic Backup switchover function with a Trickle charger where the interrupt output on $\overline{\text{INT}}$ pin is also working in VBACKUP Power state. The clock output on CLKOUT pin can be enabled normally via command over interface or can be interrupt driven and synchronized clock output enable/disable on CLKOUT pin can be freely selected. The configuration registers are stored permanently in non-volatile EEPROM and mirrored in RAM in order that the RTC module is still configured correctly even after power down. For safety against inadvertent overwriting the time registers and configuration registers can be protected by a User Programmable Password. Additionally, there is an EEOffset value customer use for aging correction.


The RV-3028-C7 provides standard Clock & Calendar function including seconds, minutes, hours (12 or 24 h), weekdays, date, months, years (with leap year correction) and interrupt functions for the Periodic Countdown Timer, Periodic Time Update, Alarm, External Event, Automatic Backup Switchover and Power On Reset. All is accessible via I²C-bus (2-wire Interface). The interrupt functions and the Time Stamp of the External Event function are also working in VBACKUP Power state. Beside the standard RTC functions a 32-bit UNIX Time counter and 43 Bytes of non-volatile User Memory EEPROM and 2 Bytes of User RAM are provided. A further Byte can be used as User RAM when the Periodic Countdown Timer is not used (Timer Value register 0Ah) and a further Byte when the Alarm function is not used (Alarm register 07h).

The registers are accessed by selecting a register address and then performing read or write operations. Multiple reads or writes may be executed in a single access, with the address automatically incrementing after each byte. When address is automatically incremented, wrap around occurs from address 3Fh to address 00h (see figure below). All registers are designed as addressable 8-bit registers despite the fact that not all registers and bits are implemented (reserved).

Handling address registers:

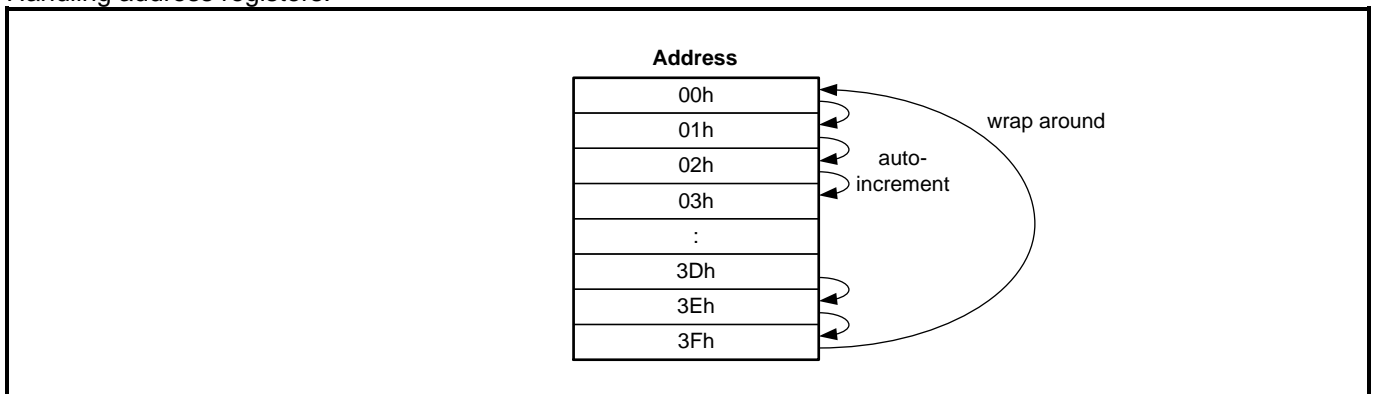

2.4. DEVICE PROTECTION DIAGRAM

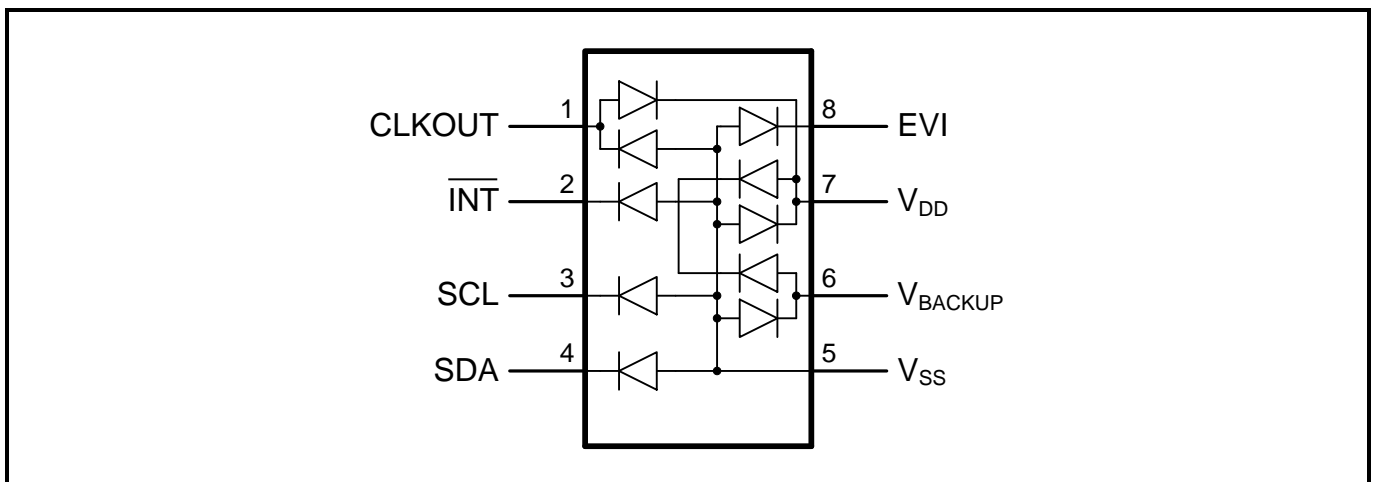

3. REGISTER ORGANIZATION

- RAM Registers at addresses 00h to 28h are accessed by selecting a register address and then performing read or write operations. Multiple reads or writes may be executed in a single access, with the address automatically incrementing after each byte.
- The Configuration Registers at addresses 2Bh and 30h to 37h are memorized in EEPROM and mirrored in RAM.
- There are 43 bytes of non-volatile user memory EEPROM at addresses 00h to 2Ah for general use.

The following tables summarize the function of each register.

3.1. REGISTER CONVENTIONS

The conventions in this table serve as a key for the register overview and individual register diagrams:

Convention (Conv.)	Description
R	Read only. Writing to this register has no effect.
W	Write only. Returns 0 when read.
R/WP	Read: Always readable. Write: Can be write-protected by password.
WP	Write only. It can be write-protected by password.
Prot.	Protected. Not readable, but normal address pointer incrementing.

3.2. REGISTER OVERVIEW

After reset, all registers are set according to Table in section REGISTER RESET VALUES SUMMARY.

Register Definitions; RAM, Address 00h to 3Fh:

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
00h	Seconds	R/WP	○	40	20	10	8	4	2	1
01h	Minutes	R/WP	○	40	20	10	8	4	2	1
02h	Hours (24 hour)	R/WP	○	○	20	10	8	4	2	1
	Hours (12 hour)				AMPM	10	8	4	2	1
03h	Weekday	R/WP	○	○	○	○	○	4	2	1
04h	Date	R/WP	○	○	20	10	8	4	2	1
05h	Month	R/WP	○	○	○	10	8	4	2	1
06h	Year	R/WP	80	40	20	10	8	4	2	1
07h	Minutes Alarm	R/WP	AE_M	40	20	10	8	4	2	1
08h	Hours Alarm (24h)	R/WP	AE_H	○	20	10	8	4	2	1
	Hours Alarm (12h)				AMPM	10	8	4	2	1
09h	Weekday Alarm	R/WP	AE_WD	○	○	○	○	4	2	1
	Date Alarm				20	10	8	4	2	1
0Ah	Timer Value 0	R/WP	128	64	32	16	8	4	2	1
0Bh	Timer Value 1	R/WP	○	○	○	○	2048	1024	512	256
0Ch	Timer Status 0	R	128	64	32	16	8	4	2	1
0Dh	Timer Status 1 shadow	R	○	○	○	○	2048	1024	512	256
0Eh	Status	R/WP	EEbusy	CLKF	BSF	UF	TF	AF	EVF	PORF
0Fh	Control 1	R/WP	TRPT	-	WADA	USEL	EERD	TE	TD	
10h	Control 2	R/WP	TSE	CLKIE	UIE	TIE	AIE	EIE	12_24	RESET
11h	GP Bits	R/WP	-	GP6	GP5	GP4	GP3	GP2	GP1	GP0
12h	Clock Int. Mask	R/WP	-	-	-	-	CEIE	CAIE	CTIE	CUIE
13h	Event Control	R/WP	○	EHL	ET		○	TSR	TSOW	TSS
14h	Count TS	R	128	64	32	16	8	4	2	1
15h	Seconds TS	R	○	40	20	10	8	4	2	1
16h	Minutes TS	R	○	40	20	10	8	4	2	1
					Hours TS	AMPM	10	8	4	2
18h	Date TS	R	○	○	20	10	8	4	2	1
19h	Month TS	R	○	○	○	10	8	4	2	1
1Ah	Year TS	R	80	40	20	10	8	4	2	1
1Bh	UNIX Time 0	R/WP	UNIX 0 [7:0]							
1Ch	UNIX Time 1	R/WP	UNIX 1 [15:8]							
1Dh	UNIX Time 2	R/WP	UNIX 2 [23:16]							
1Eh	UNIX Time 3	R/WP	UNIX 3 [31:24]							
1Fh	User RAM 1	R/WP	RAM 1 data							
20h	User RAM 2	R/WP	RAM 2 data							
21h	Password 0	W	PW 0 [7:0]							
22h	Password 1	W	PW 1 [15:8]							
23h	Password 2	W	PW 2 [23:16]							
24h	Password 3	W	PW 3 [31:24]							
25h	EEPROM Addr.	R/WP	EEaddr							
26h	EEPROM Data	R/WP	EEdata							
27h	EEPROM Com.	WP	EEcmd							
28h	ID	R	HID				VID			
29h and 2Ah	Non-existing		Non-existing RAM address (will be skipped by address pointer)							
2Ch to 2Fh	RESERVED	Prot.	RESERVED (not readable, but normal address pointer incrementing)							
38h to 3Fh	RESERVED	Prot.	RESERVED (not readable, but normal address pointer incrementing)							

○ Read only. Always 0.
- Bit not implemented. Will return a 0 when read.

Register Definitions; Configuration EEPROM with RAM mirror, Address 2Bh and 30h to 37h:

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
2Bh	EEPROM RESERVED	R/WP	RESERVED (Must not be overwritten)							
30h	EEPROM PW Enable	R/WP	EEPWE							
31h	EEPROM Password 0	WP	EEPW 0 [7:0]							
32h	EEPROM Password 1	WP	EEPW 1 [15:8]							
33h	EEPROM Password 2	WP	EEPW 2 [23:16]							
34h	EEPROM Password 3	WP	EEPW 3 [31:24]							
35h	EEPROM Clkout	R/WP	CLKOE	CLKSY	-	-	PORIE	FD		
36h	EEPROM Offset	R/WP	EEOffset [8:1]							
37h	EEPROM Backup	R/WP	EEOffset [0]	BSIE	TCE	FEDE	BSM		TCR	

- Bit not implemented. Will return a 0 when read.

Register Definitions; User EEPROM, Address 00h to 2Ah:

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
00h to 2Ah	User EEPROM (43 Bytes)	R/WP	43 Bytes of non-volatile User EEPROM							

Register Definitions; Manufacturer EEPROM, Address 2Ch to 2Fh and 38h to 3Fh:

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
2Ch to 2Fh	EEPROM RESERVED	Prot.	RESERVED							
38h to 3Fh	EEPROM RESERVED	Prot.	RESERVED							

3.3. CLOCK REGISTERS

00h – Seconds

This register holds the count of seconds, in two binary coded decimal (BCD) digits. Values will be from 00 to 59. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
00h	Seconds	R/WP	○	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	○	0	Read only. Always 0.							
6:0	Seconds	00 to 59	Holds the count of seconds, coded in BCD format. When 1 is written to the RESET bit the Seconds register value remains unchanged.							

01h – Minutes

This register holds the count of minutes, in two binary coded decimal (BCD) digits. Values will be from 00 to 59. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
01h	Minutes	R/WP	○	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	○	0	Read only. Always 0.							
6:0	Minutes	00 to 59	Holds the count of minutes, coded in BCD format.							

02h – Hours

This register holds the count of hours, in two binary coded decimal (BCD) digits. If the 12_24 bit is cleared (default) (see CONFIGURATION REGISTERS, 10h – Control 2) the values will be from 0 to 23. If the 12_24 bit is set, the hour values will range from 1 to 12 and the AMPM bit will be 0 for AM hours and 1 for PM hours. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
02h	Hours (24 hour mode) – default value	R/WP	○	○	20	10	8	4	2	1
	Hours (12 hour mode)				AMPM	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Hours (24 hour mode), 12_24 = 0 – default value										
Bit	Symbol	Value	Description							
7:6	○	0	Read only. Always 0.							
5:0	Hours (24 hour mode) – default value	0 to 23	Holds the count of hours, coded in BCD format.							
Hours (12 hour mode), 12_24 = 1										
Bit	Symbol	Value	Description							
7:6	○	0	Read only. Always 0.							
5	AMPM	0	AM hours.							
		1	PM hours.							
4:0	Hours (12 hour mode)	1 to 12	Holds the count of hours, coded in BCD format.							

3.4. CALENDAR REGISTERS

03h – Weekday

This register holds the current day of the week. Each value represents one weekday that is assigned by the user. Values will range from 0 to 6. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
03h	Weekday	R/WP	○	○	○	○	○	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:3	○	0	Read only. Always 0.							
2:0	Weekday	0 to 6	Holds the weekday counter value.							
Weekday			Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Weekday 1 – Default value			0	0	0	0	0	0	0	0
Weekday 2								0	0	1
Weekday 3								0	1	0
Weekday 4								0	1	1
Weekday 5								1	0	0
Weekday 6								1	0	1
Weekday 7								1	1	0

04h – Date

This register holds the current day of the month, in two binary coded decimal (BCD) digits. Values will range from 01 to 31. Leap years are correctly handled from 2000 to 2099. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
04h	Date	R/WP	○	○	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	1
Bit	Symbol	Value	Description							
7:6	○	0	Read only. Always 0.							
5:0	Date	01 to 31	Holds the current date of the month, coded in BCD format. – Default value = 01							

05h – Month

This register holds the current month, in two binary coded decimal (BCD) digits. Values will range from 01 to 12. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
05h	Month	R/WP	○	○	○	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	1
Bit	Symbol	Value	Description							
7:5	○	0	Read only. Always 0.							
4:0	Month	01 to 12	Holds the current month, coded in BCD format.							
Months			Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
January – Default value			0	0	0	0	0	0	0	1
February						0	0	0	1	0
March						0	0	0	1	1
April						0	0	1	0	0
May						0	0	1	0	1
June						0	0	1	1	0
July						0	0	1	1	1
August						0	1	0	0	0
September						0	1	0	0	1
October						1	0	0	0	0
November						1	0	0	0	1
December						1	0	0	1	0

06h – Year

This register holds the current year, in two binary coded decimal (BCD) digits. Values will range from 00 to 99. Leap years are correctly handled from 2000 to 2099. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
06h	Year	R/WP	80	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	Year	00 to 99	Holds the current year, coded in BCD format. – Default value = 00							

3.5. ALARM REGISTERS

07h – Minutes Alarm

This register holds the Minutes Alarm Enable bit AE_M and the alarm value for minutes, in two binary coded decimal (BCD) digits. Values will range from 00 to 59. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
07h	Minutes Alarm	R/WP	AE_M	40	20	10	8	4	2	1
	Reset		1	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	AE_M	Minutes Alarm Enable bit. Enables alarm together with AE_H and AE_WD (see USE OF THE ALARM INTERRUPT).								
		0	Minutes Alarm is enabled.							
		1	Minutes Alarm is disabled. – Default value							
6:0	Minutes Alarm	00 to 59	Holds the alarm value for minutes, coded in BCD format.							

08h – Hours Alarm

This register holds the Hours Alarm Enable bit AE_H and the alarm value for hours, in two binary coded decimal (BCD) digits. If the 12_24 bit is cleared (default value) (see CONFIGURATION REGISTERS, 10h – Control 2) the values will range from 0 to 23. If the 12_24 bit is set, the hour values will be from 0 to 12 and the AMPM bit will be 0 for AM hours and 1 for PM hours. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
08h	Hours Alarm (24 hour mode) – default value	R/WP	AE_H	○	20	10	8	4	2	1
	Hours Alarm (12 hour mode)				AMPM	10	8	4	2	1
	Reset		1	0	0	0	0	0	0	0
Hours Alarm (24 hour mode), 12_24 = 0 – default value										
Bit	Symbol	Value	Description							
7	AE_H	Hours Alarm Enable bit (see USE OF THE ALARM INTERRUPT).								
		0	Enabled							
		1	Disabled – Default value							
6	○	0	Read only. Always 0.							
5:0	Hours Alarm (24 hour mode) – default value	0 to 23	Holds the alarm value for hours, coded in BCD format.							
Hours Alarm (12 hour mode), 12_24 = 1										
Bit	Symbol	Value	Description							
7	AE_H	Hours Alarm Enable bit (see USE OF THE ALARM INTERRUPT).								
		0	Enabled							
		1	Disabled – Default value							
6	○	0	Read only. Always 0.							
5	AMPM	0	AM hours.							
		1	PM hours.							
4:0	Hours Alarm (12 hour mode)	1 to 12	Holds the alarm value for hours, coded in BCD format.							

09h – Weekday/Date Alarm

This register holds the Weekday/Date Alarm Enable bit AE_WD. If the WADA bit is 0 (Bit 5 in Register 0Fh), it holds the alarm value for the weekday (weekdays assigned by the user), in two binary coded decimal (BCD) digits. Values will range from 0 to 6. If the WADA bit is 1, it holds the alarm value for the date, in two binary coded decimal (BCD) digits. Values will range from 01 to 31. Leap years are correctly handled from 2000 to 2099. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
09h	Weekday Alarm – default value	R/WP	AE_WD	○	○	○	○	4	2	1
	Date Alarm				20	10	8	4	2	1
	Reset		1	0	0	0	0	0	0	0
Weekday Alarm, WADA = 0 – default value										
Bit	Symbol	Value	Description							
7	AE_WD	Weekday/Date Alarm Enable bit. Enables alarm together with AE_M and AE_H (see USE OF THE ALARM INTERRUPT).								
		0	Enabled							
		1	Disabled – Default value							
6:3	○	0	Read only. Always 0.							
2:0	Weekday Alarm	0 to 6	Holds the weekday alarm value, coded in BCD format.							
Date Alarm, WADA = 1										
Bit	Symbol	Value	Description							
7	AE_WD	Weekday/Date Alarm Enable bit. Enables alarm together with AE_M and AE_H (see USE OF THE ALARM INTERRUPT).								
		0	Enabled							
		1	Disabled – Default value							
6	○	0	Read only. Always 0.							
5:0	Date Alarm	01 to 31	Holds the alarm value for the date, coded in BCD format. The Reset value 00 after POR has to be replaced by a valid value (01 to 31).							

3.6. PERIODIC COUNTDOWN TIMER CONTROL REGISTERS

0Ah – Timer Value 0

This register is used to set the lower 8 bits of the Timer Value (preset value) for the Periodic Countdown Timer. This value will be reloaded into the Countdown Timer when it reaches zero if the TRPT bit is 1. This allows for periodic timer interrupts (see calculation below). Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0Ah	Timer Value 0	R/WP	128	64	32	16	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	Timer Value 0	00h to FFh	The Timer Value for the Periodic Countdown Timer in binary format (lower 8 bit) (see USE OF THE PERIODIC COUNTDOWN TIMER). When read, only the preset value is returned and not the actual value. When the Periodic Countdown Timer Interrupt function is not used, register 0Ah can be used as RAM byte.							

0Bh – Timer Value 1

This register is used to set the upper 4 bits of the Timer Value (preset value) for the Periodic Countdown Timer. This value will be reloaded into the Countdown Timer when it reaches zero if the TRPT bit is a 1. This allows for periodic timer interrupts (see calculation below). Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0Bh	Timer Value 1	R/WP	○	○	○	○	2048	1024	512	256
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:4	○	0	Read only. Always 0.							
3:0	Timer Value 1	0h to Fh	The Timer Value for the Periodic Countdown Timer in binary format (upper 4 bit) (see USE OF THE PERIODIC COUNTDOWN TIMER). When read, only the preset value is returned and not the actual value.							

Countdown Period in seconds:

$$\text{Countdown Period} = \frac{\text{Timer Value}}{\text{Timer Clock Frequency}}$$

0Ch – Timer Status 0

This register holds the lower 8 bits of the current value of the Periodic Countdown Timer. It is read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0Ch	Timer Status 0	R	128	64	32	16	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	Timer Status 0	00h to FFh	The current value of the Periodic Countdown Timer in binary format (lower 8 bit) (see USE OF THE PERIODIC COUNTDOWN TIMER).							

0Dh – Timer Status 1 shadow

This register holds the upper 4 bits of the current value of the Periodic Countdown Timer. It is read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0Dh	Timer Status 1	R	○	○	○	○	2048	1024	512	256
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:4	○	0	Read only. Always 0.							
3:0	Timer Status 1	0h to Fh	The current value of the Periodic Countdown Timer in binary format (upper 4 bit) (see USE OF THE PERIODIC COUNTDOWN TIMER).							

When TE bit is set to 1, reading the Timer Status 0 value updates the Timer Status 1 shadow register. Reading Timer Status 1 will return the Timer Status 1 shadow register value, memorized during Timer Status 0 read. When a 0 is written to the TE bit, the Timer Status 0 and Timer Status 1 registers store the last updated value.

3.7. CONFIGURATION REGISTERS

0Eh – Status

This register is used to detect the occurrence of various interrupt events and reliability problems in internal data.
Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
0Eh	Status	R/WP	EEbusy	CLKF	BSF	UF	TF	AF	EVF	PORF	
	Reset		1 → 0	0	0	0	0	0	X	1	
Bit	Symbol	Value	Description								
7	EEbusy	EEPROM Memory Busy Status Bit – (Read Only) (see EEPROM READ/WRITE)									
		0	The transfer is finished.								
		1	Indicates that the EEPROM is currently handling a read or write request and will ignore any further commands until the current one is finished. At power up a refresh is automatically generated. The time of this first refreshment is ~66 ms. After the refreshment is finished; EEbusy is cleared to 0 automatically.								
6	CLKF	Clock Output Interrupt Flag (see PROGRAMMABLE CLOCK OUTPUT)									
		0	No event detected. When cleared to 0 the frequency output will stop depending on CLKOUTSYNCH and CLKOUT settings.								
		1	If set to 0 beforehand, indicates the occurrence of an interrupt driven clock output on CLKOUT pin. The value 1 is retained until a 0 is written by the user.								
5	BSF	Backup Switch Flag (see AUTOMATIC BACKUP SWITCHOVER FUNCTION)									
		0	No backup switchover detected. At power up (POR) this flag is automatically cleared to 0. When the backup switchover function is disabled (PM field = 00) BSF is always logic 0.								
		1	If set to 0 beforehand, indicates that a switchover from main power V_{DD} to V_{BACKUP} has occurred. The value 1 can be cleared by writing a 0 to the bit if RTC module is in VDD Power state. Caution: The EVF flag is also set by an event of the Backup Switchover function when bits TSS and TSE are set to 1.								
4	UF	Periodic Time Update Flag (see PERIODIC TIME UPDATE INTERRUPT FUNCTION)									
		0	No event detected.								
		1	If set to 0 beforehand, indicates the occurrence of a Periodic Time Update Interrupt event. The value 1 is retained until a 0 is written by the user.								
3	TF	Periodic Countdown Timer Flag (see PERIODIC COUNTDOWN TIMER INTERRUPT FUNCTION)									
		0	No event detected.								
		1	If set to 0 beforehand, indicates the occurrence of a Periodic Countdown Timer Interrupt event. The value 1 is retained until a 0 is written by the user.								
2	AF	Alarm Flag (see ALARM INTERRUPT FUNCTION)									
		0	No event detected.								
		1	If set to 0 beforehand, indicates the occurrence of an Alarm Interrupt event. The value 1 is retained until a 0 is written by the user.								
1	EVF	Event Flag (see EXTERNAL EVENT FUNCTION)									
		X	At POR, the default value depends on the voltage on the EVI pin and has to be cleared by writing a 0 to the bit. At POR EHL = 0, the low level is regarded as an External Event Interrupt. At POR, EVF = 0, no LOW level was detected on EVI pin. At POR, EVF = 1, LOW level was detected on EVI pin.								
		0	No event detected.								
		1	If set to 0 beforehand, indicates the occurrence of an External Event. The value 1 is retained until a 0 is written by the user. Caution: The EVF flag is also set by an event of the Backup Switchover function when bits TSS and TSE are set to 1.								
0	PORF	Power On Reset Flag									
		0	No voltage drop detected.								
		1	If set to 0 beforehand, indicates a voltage drop below V_{POR} . The data in the device are no longer valid and all registers must be initialized. The value 1 is retained until a 0 is written by the user. At startup (POR) the value is set to 1, the user has to write 0 to the flag to use it.								

0Fh – Control 1

This register is used to specify the target for the Alarm Interrupt function and the Periodic Time Update Interrupt function and to select or set operations for the Periodic Countdown Timer. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
0Fh	Control 1	R/WP	TRPT	-	WADA	USEL	EERD	TE	TD		
	Reset		0	0	0	0	0	0	0	0	
Bit	Symbol	Value	Description								
7	TRPT	Timer Repeat bit. Specifies either Single or Repeat Mode for the Periodic Countdown Timer Interruption function (see PERIODIC COUNTDOWN TIMER INTERRUPT FUNCTION).									
		0	Single Mode is selected. When the Countdown Timer is enabled (TE = 1) it will halt when it reaches zero and TE is automatically cleared. – Default value								
		1	Repeat Mode is selected. When the Countdown Timer is enabled (TE = 1) it reloads the value from the Timer Value registers upon reaching 0, and continues counting.								
6	-	0	Bit not implemented. Will return a 0 when read.								
5	WADA	Weekday Alarm / Date Alarm selection bit. This bit is used to specify either the Weekday or Date as the source for the Alarm Interrupt function (see ALARM INTERRUPT FUNCTION).									
		0	Weekday is the source for the Alarm Interrupt function. – Default value								
		1	Date is the source for the Alarm Interrupt function.								
4	USEL	Update Interrupt Select bit. Specifies either Second or Minute update for the Periodic Time Update Interrupt function. When 1 is written to the RESET bit the interrupt function is retarded (see PERIODIC TIME UPDATE INTERRUPT FUNCTION).									
		0	Second update (Auto reset time $t_{RTN2} = 500$ ms). – Default value								
		1	Minute update (Auto reset time $t_{RTN2} = 7.813$ ms).								
3	EERD	EEPROM Memory Refresh Disable bit. When 1, disables the automatic refresh of the Configuration Registers from the non-volatile EEPROM Memory (see AUTOMATIC REFRESH (ALL CONFIGURATION EEPROM → RAM)).									
		0	Refresh is active. All data in the Configuration Registers are refreshed by the data stored in the EEPROM each 24 hours, at date increment (1 second before midnight). Refresh is only active when RTC is not in VBACKUP mode. At power up a refresh is automatically generated. The time of the first refreshment is ~66 ms. – Default value								
		1	Refresh is disabled.								
2	TE	Periodic Countdown Timer Enable bit. This bit controls the start/stop setting for the Periodic Countdown Timer Interruption function (see PERIODIC COUNTDOWN TIMER INTERRUPT FUNCTION).									
		0	Stops the Periodic Countdown Timer Interrupt function. TE is also automatically cleared when Single Mode is selected (TRPT = 0) and when the Countdown Timer reaches zero. – Default value								
		1	Starts the Periodic Countdown Timer Interrupt function (a countdown starts from the preset value set in Timer Value registers).								
1:0	TD	00 to 11	Timer Clock Frequency selection. Sets the countdown source clock for the Periodic Countdown Timer Interrupt function. With this setting the Auto reset time t_{RTN1} is also defined. When the clock source has been set to Second update (1 Hz) or Minute update (1/60 Hz), the timing of both, countdown and interrupts, is coordinated with the clock update timing. When 1 is written to the RESET bit, the interrupt function is retarded. See table below (see also PERIODIC COUNTDOWN TIMER INTERRUPT FUNCTION).								
TD Value	Timer Clock Frequency	Countdown period	t_{RTN1}	RESET bit							
00	4096 Hz – Default value	244.14 μ s	122 μ s	When 1 is written to the RESET bit, the interrupt function is retarded.							
01	64 Hz	15.625 ms	7.813 ms								
10	1 Hz	1 s									
11	1/60 Hz	60 s									

10h – Control 2

This register is used to control the interrupt event output for the $\overline{\text{INT}}$ pin, the stop/start status of clock and calendar operations, the interrupt controlled clock output on CLKOUT pin, the hour mode and the time stamp enable. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
10h	Control 2	R/WP	TSE	CLKIE	UIE	TIE	AIE	EIE	12_24	RESET	
	Reset		0	0	0	0	0	0	0	0	
Bit	Symbol	Value	Description								
7	TSE	Time Stamp Enable bit (see TIME STAMP FUNCTION)									
		0	Disables the time stamp function. – Default value								
		1	Enables the Time stamp function.								
6	CLKIE	Interrupt Controlled Clock Output Enable bit. When enabled, it is possible to wake-up an external system by outputting a frequency. (see PROGRAMMABLE CLOCK OUTPUT)									
		0	Disabled – Default value								
		1	When set to 1, the clock output on CLKOUT pin is automatically enabled when an interrupt occurs, based on the Clock Interrupt Mask Register (12h) and according to clock setting defined by the FD field. This function is disabled in VBACKUP Power state.								
5	UIE	Periodic Time Update Interrupt Enable bit (see PERIODIC TIME UPDATE INTERRUPT FUNCTION)									
		0	No interrupt signal is generated on $\overline{\text{INT}}$ pin when a Periodic Time Update event occurs or the signal is cancelled on $\overline{\text{INT}}$ pin. – Default value								
		1	An interrupt signal is generated on $\overline{\text{INT}}$ pin when a Periodic Time Update event occurs. The low-level output signal is automatically cleared after $t_{\text{RTN2}} = 500 \text{ ms}$ (Second update) or $t_{\text{RTN2}} = 7.813 \text{ ms}$ (Minute update).								
4	TIE	Periodic Countdown Timer Interrupt Enable bit (see PERIODIC COUNTDOWN TIMER INTERRUPT FUNCTION)									
		0	No interrupt signal is generated on $\overline{\text{INT}}$ pin when a Periodic Countdown Timer event occurs or the signal is cancelled on $\overline{\text{INT}}$ pin. – Default value								
		1	An interrupt signal is generated on $\overline{\text{INT}}$ pin when a Periodic Countdown Timer event occurs. The low-level output signal is automatically cleared after $t_{\text{RTN1}} = 122 \mu\text{s}$ (TD = 00) or $t_{\text{RTN1}} = 7.813 \text{ ms}$ (TD = 01, 10, 11).								
3	AIE	Alarm Interrupt Enable bit (see ALARM INTERRUPT FUNCTION)									
		0	No interrupt signal is generated on $\overline{\text{INT}}$ pin when an Alarm event occurs or the signal is cancelled on $\overline{\text{INT}}$ pin. – Default value								
		1	An interrupt signal is generated on $\overline{\text{INT}}$ pin when an Alarm event occurs. This setting is retained until the AF flag is cleared to 0 (no automatic cancellation).								
2	EIE	Event Interrupt Enable bit (see EXTERNAL EVENT FUNCTION and INTERRUPT SCHEME)									
		0	No interrupt signal is generated on $\overline{\text{INT}}$ pin when an External Event on EVI pin occurs, or when an Automatic Backup Switchover occurs when TSS and TSE are set to 1, or the signal on $\overline{\text{INT}}$ pin is cleared. – Default value								
		1	An interrupt signal is generated on $\overline{\text{INT}}$ pin when an External Event on EVI pin occurs, or when an Automatic Backup Switchover occurs when TSS and TSE are set to 1. The signal on $\overline{\text{INT}}$ pin is retained until the EVF flag is cleared to 0 (no automatic cancellation).								
1	12_24	12 or 24 hour mode (see CLOCK REGISTERS and ALARM REGISTERS)									
		0	24 hour mode is selected (0 to 23). – Default value								
		1	12 hour mode is selected (1 to 12).								
0	RESET	Reset bit. This bit is used for a software-based time adjustment (synchronizing) (see RESET BIT FUNCTION).									
		0	No reset. – Default value								
		1	When 1 is written to the RESET bit, the clock prescaler from 4096 Hz to 1 Hz is reset. An eventual present memorized 1 Hz update is also reset. The RESET bit is then automatically cleared. Because the upper two stages of the prescaler are not reset (16.384 kHz and 8192 Hz) and the I ² C interface is asynchronous, the first 1 Hz period after synchronization will be 0 to 244 μs shorter than 1 second. Resetting the prescaler will have an influence on the length of the current clock period on all subsequent peripherals (clock and calendar, CLKOUT, timer clock, update timer clock, UNIX clock, EVI input filter).								

11h – GP Bits

This register holds the bits for general purpose use (7 bits). Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
11h	GP Bits	R/WP	-	GP6	GP5	GP4	GP3	GP2	GP1	GP0
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	-	0	Bit not implemented. Will return a 0 when read.							
6:0	GPx	0 or 1	Register bits for general purpose use (7 bits).							

12h – Clock Interrupt Mask

This register is used to select a predefined interrupt for automatic clock output. Setting a bit to 1 selects the corresponding interrupt. Multiple interrupts can be selected. After power on, no interrupt is selected (see CLOCK OUTPUT SCHEME). Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
12h	Clock Interrupt Mask	R/WP	-	-	-	-	CEIE	CAIE	CTIE	CUIE
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:4	-	0	Bit not implemented. Will return a 0 when read.							
3	CEIE	Clock output when Event Interrupt bit. The source for the Event Interrupt can be the External Event from EVI pin or the Automatic Backup Switchover (see INTERRUPT SCHEME).								
		0	Disabled – Default value							
		1	Enabled. Internal signal EI is selected.							
2	CAIE	Clock output when Alarm Interrupt bit.								
		0	Disabled – Default value							
		1	Enabled. Internal signal AI is selected.							
1	CTIE	Clock output when Periodic Countdown Timer Interrupt bit.								
		0	Disabled – Default value							
		1	Enabled: Internal signal TI is selected.							
0	CUIE	Clock output when Periodic Time Update Interrupt bit.								
		0	Disabled – Default value							
		1	Enabled. Internal signal UI is selected.							

3.8. EVENT CONTROL REGISTER

13h – Event Control

This register controls the event detection on the EVI pin. Depending of the EHL bit a high or a low signal can be detected. Moreover a digital glitch filtering can be applied to the EVI signal by selecting a sampling period in the ET field. Furthermore this register holds control functions for the Time Stamp data. And the switching over to VBACKUP Power state can be selected as source for an event. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
13h	Event Control	R/WP	○	EHL	ET		○	TSR	TSOW	TSS
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	○	0	Read only. Always 0.							
6	EHL	Event High/Low detection Select (see EXTERNAL EVENT FUNCTION)								
		0	The low level (negative edge) is regarded as the External Event on pin EVI. – Default value							
		1	The high level (positive edge) is regarded as the External Event on pin EVI.							
5:4	ET	Event Filtering Time set. Applies a digital filtering to the EVI pin by sampling the EVI signal. Edge and stable steady state are detected when ET = 01, 10 or 11 (see USE OF THE EXTERNAL EVENT FUNCTION).								
		00	No filtering. Edge detection (minimal pulse time is 30.5 μs). – Default value							
		01	3.9 ms sampling period (256 Hz).							
		10	15.6 ms sampling period (64 Hz).							
3	○	0	Read only. Always 0.							
			Time Stamp Reset bit (see TIME STAMP FUNCTION)							
2	TSR	0	Disables the Time Stamp Reset. – Default value							
		1	When this bit is set to 1, all seven time stamp registers (Count TS to Year TS) are cleared to 00h. The TSR bit is automatically cleared to 0 after performing the reset.							
1	TSOW	Time Stamp Overwrite bit. Controls the overwrite function of the TS registers. Exception: The counter Count TS is always working, independent of the settings of the overwrite bit TSOW. (see TIME STAMP FUNCTION)								
		0	The time stamp of the first occurred event is recorded and remains in TS registers. To initialize or reinitialize the first event detection function, the EVF has to be cleared. – Default value							
		1	The time stamp of the last occurred event is recorded and TS registers are overwritten. The EVF flag does not need to be cleared.							
0	TSS	Time Stamp Source Selection bit (see TIME STAMP FUNCTION)								
		0	A time stamp is generated (if TSE = 1) when an External Event on EVI pin occurs – Default value							
		1	A time stamp is generated (if TSE = 1) when the circuit goes to VBACKUP Power state.							

3.9. TIME STAMP REGISTERS

14h – Count TS

This register contains the number of occurrences of the corresponding event in standard binary format. The values range from 0 to 255. It is read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
14h	Count TS	R	128	64	32	16	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	Count TS	0 to 255	Number of occurrences of the corresponding event, coded in binary. In case of an overflow the counter starts again with 00h When bit TSE = 0, the counter stops counting events. When bit TSE = 1, the counter is increased when event occurs. The counter Count TS is always working, independent of the settings of the overwrite bit TSOW. The Count TS register is cleared to 00h when a 1 is written to the reset bit TSR (see TIME STAMP FUNCTION).							

15h – Seconds TS

This register holds a recorded Time Stamp of the Seconds register, in two binary coded decimal (BCD) digits. The values are from 00 to 59. It is read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
15h	Seconds TS	R	0	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	0	0	Read only. Always 0.							
6:0	Seconds TS	00 to 59	Holds a recorded Time Stamp of the Seconds register, coded in BCD format. When enabled (bit TSE = 1), Depending on the setting of the TSOW bit it contains the time stamp of the first or last occurred event. The Seconds TS register is cleared to 00h when a 1 is written to the reset bit TSR.							

16h – Minutes TS

This register holds a recorded Time Stamp of the Minutes register, in two binary coded decimal (BCD) digits. The values are from 00 to 59. It is read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
16h	Minutes TS	R	0	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7	0	0	Read only. Always 0.							
6:0	Minutes TS	00 to 59	Holds a recorded Time Stamp of the Minutes register, coded in BCD format. When enabled (bit TSE = 1), Depending on the setting of the TSOW bit it contains the time stamp of the first or last occurred event. The Minutes TS register is cleared to 00h when a 1 is written to the reset bit TSR.							

17h – Hours TS

This register holds a recorded Time Stamp of the Hours register, in two binary coded decimal (BCD) digits. If the 12_24 bit is cleared (default) (see CONFIGURATION REGISTERS, 10h – Control 2) the values will be from 0 to 23. If the 12_24 bit is set, the hour values will range from 1 to 12 and the AMPM bit will be 0 for AM hours and 1 for PM hours. It is read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
17h	Hours TS (24 hour mode) – default value	R	○	○	20	10	8	4	2	1
	Hours TS (12 hour mode)		AMPM	10	8	4	2	1		
	Reset		0	0	0	0	0	0	0	0

Hours TS (24 hour mode) – default value			
Bit	Symbol	Value	Description
7:6	○	0	Read only. Always 0.
5:0	Hours TS (24 hour mode) – default value	0 to 23	Holds a recorded Time Stamp of the Hours register, coded in BCD format. When enabled (bit TSE = 1), Depending on the setting of the TSOW bit it contains the time stamp of the first or last occurred event. The Hours TS register is cleared to 00h when a 1 is written to the reset bit TSR.

Hours TS (12 hour mode)			
Bit	Symbol	Value	Description
7:6	○	0	Read only. Always 0.
5	AMPM	0	AM hours, from the recorded Time Stamp of the Hours register.
		1	PM hours, from the recorded Time Stamp of the Hours register.
4:0	Hours TS (12 hour mode)	1 to 12	Holds a recorded Time Stamp of the Hours register, coded in BCD format. When enabled (bit TSE = 1), Depending on the setting of the TSOW bit it contains the time stamp of the first or last occurred event. The Hours TS register is cleared to 00h when a 1 is written to the reset bit TSR.

18h – Date TS

This register holds a recorded Time Stamp of the Date register, in two binary coded decimal (BCD) digits. The values will range from 01 to 31. It is read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
18h	Date TS	R	○	○	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0

Bit	Symbol	Value	Description
7:6	○	0	Read only. Always 0.
5:0	Date TS	01 to 31	Holds a recorded Time Stamp of the Date register, coded in BCD format. When enabled (bit TSE = 1), Depending on the setting of the TSOW bit it contains the time stamp of the first or last occurred event. The Date TS register is cleared to 00h when a 1 is written to the reset bit TSR. After POR or when reset with bit TSR and when a Time Stamp is recorded, the value 00 will be automatically replaced by a valid value (01 to 31).

19h – Month TS

This register holds a recorded Time Stamp of the Month register, in two binary coded decimal (BCD) digits. The values will range from 01 to 12. It is read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
19h	Month TS	R	○	○	○	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:5	○	0	Read only. Always 0.							
4:0	Month TS	01 to 12	Holds a recorded Time Stamp of the Month register, coded in BCD format. When enabled (bit TSE = 1), Depending on the setting of the TSOW bit it contains the time stamp of the first or last occurred event. The Month TS register is cleared to 00h when a 1 is written to the reset bit TSR. After POR or when reset with bit TSR and when a Time Stamp is recorded, the value 00 will be automatically replaced by a valid value (01 to 12).							

1Ah – Year TS

This register holds a recorded Time Stamp of the Year register, in two binary coded decimal (BCD) digits. Values will range from 00 to 99. It is read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1Ah	Year TS	R	80	40	20	10	8	4	2	1
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	Year TS	00 to 99	Holds a recorded Time Stamp of the Year register, coded in BCD format. When enabled (bit TSE = 1), Depending on the setting of the TSOW bit it contains the time stamp of the first or last occurred event. The Year TS register is cleared to 00h when a 1 is written to the reset bit TSR.							

3.10. UNIX TIME REGISTERS

The UNIX Time counter is a 32-bit counter with the value in binary format. The counter will roll-over to 00000000h when reaching FFFFFFFFh. The 4 counter registers are fully readable and writable. The counter source clock is the digitally tuned 1 Hz clock frequency. The UNIX Time counter increment is inhibited during I²C write access to the 4 UNIX Time registers to allow coherent data values (see SETTING AND READING THE TIME). Read: Always readable. Write: Can be write-protected by password.

1Bh – UNIX Time 0

Bit 0 to 7 from 32-bit UNIX Time counter.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1Bh	UNIX Time 0	R/WP	UNIX 0 [7:0]							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	UNIX 0 [7:0]	00h to FFh	Bit 0 to 7 from 32-bit UNIX counter.							

1Ch – UNIX Time 1

Bit 8 to 15 from 32-bit UNIX Time counter.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1Ch	UNIX Time 1	R/WP	UNIX 1 [15:8]							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	UNIX 1 [15:8]	00h to FFh	Bit 8 to 15 from 32-bit UNIX counter.							

1Dh – UNIX Time 2

Bit 16 to 23 from 32-bit UNIX Time counter.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1Dh	UNIX Time 2	R/WP	UNIX 2 [23:16]							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	UNIX 2 [23:16]	00h to FFh	Bit 16 to 23 from 32-bit UNIX counter.							

1Eh – UNIX Time 3

Bit 24 to 31 from 32-bit UNIX Time counter.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1Eh	UNIX Time 3	R/WP	UNIX 3 [31:24]							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	UNIX 3 [31:24]	00h to FFh	Bit 24 to 31 from 32-bit UNIX counter.							

3.11. RAM REGISTERS

Two free RAM bytes, which can be used for any purpose, for example, status bytes of the system.

1Fh – User RAM 1

This register holds the bits for general purpose use. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
1Fh	User RAM 1	R/WP	RAM 1							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	RAM 1	00h to FFh	RAM 1 data							

20h – User RAM 2

This register holds the bits for general purpose use. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
20h	User RAM 2	R/WP	RAM 2							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	RAM 2	00h to FFh	RAM 2 data							

3.12. PASSWORD REGISTERS

After a Power up and the first refreshment of ~66 ms, the PW 0 to PW 3 registers are reset to 00h. When enabled by writing 255 into the EEPROM Password Enable register EEPWE (EEPROM 30h), the Password registers are used to be written with the 32-Bit Password necessary to be able to write into all writable registers (for time and configuration registers). This 32-Bit Password is compared to the 32 bits stored in the EEPROM Password registers EEPW 0 to EEPW 3 (EEPROM 31h to 34h) (see EEPROM PASSWORD REGISTERS).

21h – Password 0

Bit 0 to 7 from 32-bit Password. Write only. Returns 0 when read.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
21h	Password 0	W	PW 0 [7:0]							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	PW 0 [7:0]	00h to FFh	Bit 0 to 7 from 32-bit Password							

22h – Password 1

Bit 8 to 15 from 32-bit Password. Write only. Returns 0 when read.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
22h	Password 1	W	PW 1 [15:8]							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	PW 1 [15:8]	00h to FFh	Bit 8 to 15 from 32-bit Password							

23h – Password 2

Bit 16 to 23 from 32-bit Password. Write only. Returns 0 when read.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
23h	Password 2	W	PW 2 [23:16]							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	PW 2 [23:16]	00h to FFh	Bit 16 to 23 from 32-bit Password							

24h – Password 3

Bit 24 to 31 from 32-bit Password. Write only. Returns 0 when read.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
24h	Password 3	W	PW 3 [31:24]							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	PW 3 [31:24]	00h to FFh	Bit 24 to 31 from 32-bit Password							

3.13. EEPROM MEMORY CONTROL REGISTERS

See also EEPROM READ/WRITE.

25h –EEPROM Address

This register holds the Address used for read or write from/to a single EEPROM Memory byte. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
25h	EEPROM Address	R/WP	EEaddr							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	EEaddr	00h to FFh	Address for direct read or write one EEPROM Memory byte.							

26h –EEPROM Data

This register holds the Data that are read from, or that are written to a single EEPROM Memory byte. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
26h	EEPROM Data	R/WP	EEdata							
	Reset		X	X	X	X	X	X	X	X
Bit	Symbol	Value	Description							
7:0	EEdata	00h to FFh	Data from direct read or for direct write to one EEPROM Memory byte.							

27h –EEPROM Commands

This register must be written with specific values, in order to read or write all (readable/writable) configuration registers or to read or write from/to a single EEPROM Memory byte.

Before using this commands, the automatic refresh function has to be disabled (EERD = 1) and the busy status bit EEbusy has to indicate, that the last transfer has been finished (EEbusy = 0). Before entering the command 11h, 12h, 21h or 22h, EEcmd has to be written with 00h. Write only. It can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
27h	EEPROM Commands	WP	EEcmd							
	Reset		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	EEcmd		Commands for EEPROM Memory (see EEPROM READ/WRITE)							
		00h	First command must be 00h. – Default value							
		11h	Write to all Configuration EEPROM registers (Update). When writing a value of 11h, data from all (readable/writable) configuration RAM bytes (address 30h to 37h) are written (stored) into the corresponding EEPROM bytes.							
		12h	Read all Configuration EEPROM registers (Refresh). When writing a value of 12h, data from all Configuration EEPROM bytes are read and copied into the corresponding RAM bytes (address 30h to 37h).							
		21h	Write to one EEPROM byte (Configuration or User EEPROM). When writing a value of 21h, data from EEdata byte is written (stored) into the EEPROM byte with the address specified in EEaddr. (For Configuration EEPROM bytes (address 30h to 37h) and User EEPROM bytes (address 00h to 2Ah)).							
22h	Read one EEPROM byte (from Configuration or User EEPROM). When writing a value of 22h, data from the EEPROM byte with the address specified in EEaddr is read and copied into the EEdata byte. (For Configuration EEPROM bytes (address 30h to 37h) and User EEPROM bytes (address 00h to 2Ah)).									

3.14. ID REGISTER

28h – ID

This register holds the 4 bit Hardware Identification number (HID) and the 4 bit Version Identification number (VID). The ID can be used to monitor a hardware modification and the version in the production line. It is read only. Writing to this register has no effect.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
28h	ID	R	HID				VID			
	Reset		Preconfigured Value				Preconfigured Value			
Bit	Symbol	Value	Description							
7:4	HID	0 to 15	Hardware Identification number.							
3:0	VID	0 to 15	Version Identification number.							

3.15. CONFIGURATION EEPROM WITH RAM MIRROR REGISTERS

All Configuration EEPROM at addresses 2Bh and 30h to 37h are memorized in the EEPROM and mirrored in the RAM.

3.15.1. EEPROM RESERVED

2Bh – EEPROM RESERVED

Read: Always readable. Write: Can be write-protected by password. It must not be overwritten.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
2Bh	EEPROM RESERVED	R/WP	RESERVED (Must not be overwritten)							
	Default value on delivery		Preconfigured Value							
Bit	Symbol	Value	Description							
7:0	RESERVED		Preconfigured Value – It must not be overwritten.							

3.15.2. EEPROM PASSWORD ENABLE REGISTER

After a Power up and the first refreshment of ~66 ms, the Password Enable value EEPWE is copied from the EEPROM. The default value preset on delivery is 00h.

30h – EEPROM Password Enable

Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
30h	EEPROM Password Enable	R/WP	EEPWE							
	Default value on delivery		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	EEPWE		EEPROM Password Enable							
		0 to 254	Password function disabled. When writing a value not equal 255, the password function is disabled. – 00h is default value preset on delivery							
		255	Password function enabled. When writing a value of 255, the Password registers (21h to 24h) can be used to enter the 32-bit Password.							

3.15.3. EEPROM PASSWORD REGISTERS

After a Power up and the first refreshment of ~66 ms, the EEPROM Password values EEPW 0 to EEPW 3 are copied from the EEPROM. The default values preset on delivery are 00h.

31h – EEPROM Password 0

Bit 0 to 7 from 32-bit EEPROM Password. Write only. It can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
31h	EEPROM Password 0	WP	EEPW 0 [7:0]							
	Default value on delivery		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	EEPW 0 [7:0]	00h to FFh	Bit 0 to 7 from 32-bit EEPROM Password							

32h – EEPROM Password 1

Bit 8 to 15 from 32-bit EEPROM Password. Write only. It can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
32h	EEPROM Password 1	WP	EEPW 1 [15:8]							
	Default value on delivery		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	EEPW 1 [15:8]	00h to FFh	Bit 8 to 15 from 32-bit EEPROM Password							

33h – EEPROM Password 2

Bit 16 to 23 from 32-bit EEPROM Password. Write only. It can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
33h	EEPROM Password 2	WP	EEPW 2 [23:16]							
	Default value on delivery		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	EEPW 2 [23:16]	00h to FFh	Bit 16 to 23 from 32-bit EEPROM Password							

34h – EEPROM Password 3

Bit 24 to 31 from 32-bit EEPROM Password. Write only. It can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
34h	EEPROM Password 3	WP	EEPW 3 [31:24]							
	Default value on delivery		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	EEPW 3 [31:24]	00h to FFh	Bit 24 to 31 from 32-bit EEPROM Password							

3.15.4. EEPROM CLKOUT REGISTER

35h – EEPROM Clkout

A programmable square wave output is available at CLKOUT pin. Operation is enabled by the CLKOE bit (see PROGRAMMABLE CLOCK OUTPUT). Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
35h	EEPROM Clkout	R/WP	CLKOE	CLKSY	-	-	PORIE	FD			
	Default value on delivery		1	1	0	0	0	0	0	0	
Bit	Symbol	Value	Description								
7	CLKOE	CLKOUT Enable bit (see PROGRAMMABLE CLOCK OUTPUT)									
		0	The CLKOUT pin is LOW.								
6	CLKSY	CLKOUT Synchronized enable/disable (see SYNCHRONIZED ENABLE/DISABLE)									
		0	Disabled								
5:4	-	0									
		Bit not implemented. Will return a 0 when read.									
3	PORIE	Power On Reset Interrupt Enable bit (see POWER ON RESET INTERRUPT FUNCTION)									
		0	No interrupt signal is generated on $\overline{\text{INT}}$ pin when a Power On Reset occurs or the signal is cancelled on INT pin. – Default value on delivery								
2:0	FD	1									
		An interrupt signal is generated on $\overline{\text{INT}}$ pin when a Power On Reset occurs. This setting is retained until the PORF flag is cleared to 0 (no automatic cancellation).									
000 to 111		CLKOUT Frequency Selection (see CLKOUT FREQUENCY SELECTION)									
FD	CLKOUT Frequency Selection					Effect when 1 is written to the RESET bit					
000	32.768 kHz – Default value on delivery					No effect					
001	8192 Hz ⁽¹⁾					No effect					
010	1024 Hz ⁽¹⁾					CLKOUT goes LOW					
011	64 Hz ⁽¹⁾					CLKOUT goes LOW					
100	32 Hz ⁽¹⁾					CLKOUT goes LOW					
101	1 Hz ⁽¹⁾					CLKOUT goes LOW					
110	Predefined periodic countdown timer interrupt ⁽¹⁾ ⁽²⁾					CLKOUT goes LOW					
111	CLKOUT = LOW					No effect					
⁽¹⁾ 8192 Hz to 1 Hz clock pulses and the timer interrupt pulses can be affected by compensation pulses (see FREQUENCY OFFSET CORRECTION). ⁽²⁾ CLKSY bit has no effect.											

3.15.5. EEPROM OFFSET REGISTER

The registers EEPROM Offset and EEPROM Backup hold the EEOffset value to digitally compensate the initial frequency deviation of the 32.768 kHz oscillator or for aging adjustment (see FREQUENCY OFFSET CORRECTION).

Caution: Bit EEOffset [0] is in the EEPROM BACKUP REGISTER.

36h – EEPROM Offset

This register holds the upper 8 bits of the EEOffset value. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
36h	EEPROM Offset	R/WP	EEOffset [8:1]							
	Default value on delivery		0	0	0	0	0	0	0	0
Bit	Symbol	Value	Description							
7:0	EEOffset [8:1]	00h to FFh	Bits 8 to 1 of the EEOffset [8:0] value. EEOffset defines correction pulses in steps. Each pulse introduces a deviation of 0.9537 ppm, the maximum range is from +243.2 ppm to -244.1 ppm. The value of 0.9537 ppm is based on a nominal 32.768 kHz clock (see FREQUENCY OFFSET CORRECTION).							

3.15.6. EEPROM BACKUP REGISTER

37h – EEPROM Backup

This register is used to control the switchover function and the trickle charger and it holds bit 0 (LSB) of the EEOffset value. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
37h	EEPROM Backup	R/WP	EEOffset [0]	BSIE	TCE	FEDE	BSM		TCR	
	Default value on delivery		0	0	0	1	0	0	0	0
Bit	Symbol	Value	Description							
7	EEOffset [0]	0 to 1	Bit 0 of the EEOffset [8:0] value. EEOffset defines correction pulses in steps. Each pulse introduces a deviation of 0.9537 ppm, the maximum range is from +243.2 ppm to -244.1 ppm. The value of 0.9537 ppm is based on a nominal 32.768 kHz clock (see FREQUENCY OFFSET CORRECTION).							
6	BSIE	Backup Switchover Interrupt Enable bit (see AUTOMATIC BACKUP SWITCHOVER FUNCTION and AUTOMATIC BACKUP SWITCHOVER INTERRUPT FUNCTION)								
		0	No interrupt signal is generated on $\overline{\text{INT}}$ pin when an Automatic Backup Switchover occurs or the signal is cancelled on $\overline{\text{INT}}$ pin.– Default value on delivery							
5	TCE	Trickle Charger Enable bit (see TRICKLE CHARGER)								
		1	Enabled							
4	FEDE	Fast Edge Detection Enable bit (see AUTOMATIC BACKUP SWITCHOVER FUNCTION and AUTOMATIC BACKUP SWITCHOVER INTERRUPT FUNCTION)								
		1	FEDE should always be set to 1. When the FEDE bit is 1, the Fast Edge Detection for the Automatic Backup Switchover function is enabled. A voltage with a rising or falling edge with a slew rate typically bigger than 7 V/ms can be recorded correctly on V_{DD} power supply pin and the Automatic Backup Switchover function is adapted to this specific situation. – Default value on delivery							
3:2	BSM	Backup Switchover Mode (see AUTOMATIC BACKUP SWITCHOVER FUNCTION and AUTOMATIC BACKUP SWITCHOVER INTERRUPT FUNCTION)								
		To read/write to/from the EEPROM, the user has to disable the Backup Switchover function by setting the BSM field to 00 or 10 (see routine in EEPROM READ/WRITE CONDITIONS)								
		00	Switchover Disabled. The automatic backup switchover function is disabled. Used when only one power supply is available (V_{DD}). V_{BACKUP} pin should be connected to ground. – Default value on delivery							
		01	Enables the Direct Switching Mode (DSM). Switchover when $V_{\text{DD}} < V_{\text{BACKUP}}$.							
1:0	TCR	Trickle Charger Series Resistance (see TRICKLE CHARGER)								
		00	TCR = 1 k Ω – Default value on delivery							
		01	TCR = 3 k Ω							
		10	TCR = 6 k Ω							
		11	TCR = 11 k Ω							

EEOffset [8:0] value (9 bits):

EEOffset [8:0]	EEOffset correction value in decimal	Correction pulses in steps	CLKOUT frequency correction in ppm ^(*)
011111111	255	255	243.187
011111110	254	254	242.233
:	:	:	:
000000001	1	1	0.954
000000000 (default)	0	0	0.000
111111111	511	-1	-0.954
111111110	510	-2	-1.907
:	:	:	:
100000001	257	-255	-243.187
100000000	256	-256	-244.141

^(*) Each correction pulse corresponds to $1 / (32768 \times 32) = 0.9537$ ppm.

The frequency deviation measured at CLKOUT pin can be compensated by computing the correction value EEOffset and writing it into the EEPROM Offset and EEPROM Backup registers (see FREQUENCY OFFSET CORRECTION).

3.16. USER EEPROM

00h – 2Ah – User EEPROM

43 Bytes of User EEPROM for general purpose storage are provided. Read: Always readable. Write: Can be write-protected by password.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
00h to 2Ah	User EEPROM	R/WP	43 Bytes of non-volatile User EEPROM							

3.17. MANUFACTURER EEPROM

2Ch – 2Fh and 38h to 3Fh – Manufacturer EEPROM

This registers are Protected. Not readable, but normal address pointer incrementing.

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
2Ch to 2Fh	EEPROM RESERVED	Prot.	4 Bytes of non-volatile Manufacturer EEPROM							
38h to 3Fh	EEPROM RESERVED	Prot.	8 Bytes of non-volatile Manufacturer EEPROM							

3.18. REGISTER RESET VALUES SUMMARY

Reset values; RAM, Address 00h to 3Fh:

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
00h	Seconds	R/WP	0	0	0	0	0	0	0	0
01h	Minutes	R/WP	0	0	0	0	0	0	0	0
02h	Hours (24h / 12h)	R/WP	0	0	0	0	0	0	0	0
03h	Weekday	R/WP	0	0	0	0	0	0	0	0
04h	Date	R/WP	0	0	0	0	0	0	0	1
05h	Month	R/WP	0	0	0	0	0	0	0	1
06h	Year	R/WP	0	0	0	0	0	0	0	0
07h	Minutes Alarm	R/WP	1	0	0	0	0	0	0	0
08h	Hours Alarm (24h / 12h)	R/WP	1	0	0	0	0	0	0	0
09h	Weekday Alarm / Date Alarm	R/WP	1	0	0	0	0	0	0	0
0Ah	Timer Value 0	R/WP	0	0	0	0	0	0	0	0
0Bh	Timer Value 1	R/WP	0	0	0	0	0	0	0	0
0Ch	Timer Status 0	R	0	0	0	0	0	0	0	0
0Dh	Timer Status 1 shadow	R	0	0	0	0	0	0	0	0
0Eh	Status	R/WP	1 → 0	0	0	0	0	0	X	1
0Fh	Control 1	R/WP	0	0	0	0	0	0	0	0
10h	Control 2	R/WP	0	0	0	0	0	0	0	0
11h	GP Bits	R/WP	0	0	0	0	0	0	0	0
12h	Clock Int. Mask	R/WP	0	0	0	0	0	0	0	0
13h	Event Control	R/WP	0	0	0	0	0	0	0	0
14h	Count TS	R	0	0	0	0	0	0	0	0
15h	Seconds TS	R	0	0	0	0	0	0	0	0
16h	Minutes TS	R	0	0	0	0	0	0	0	0
17h	Hours TS	R	0	0	0	0	0	0	0	0
18h	Date TS	R	0	0	0	0	0	0	0	0
19h	Month TS	R	0	0	0	0	0	0	0	0
1Ah	Year TS	R	0	0	0	0	0	0	0	0
1Bh	UNIX Time 0	R/WP	0	0	0	0	0	0	0	0
1Ch	UNIX Time 1	R/WP	0	0	0	0	0	0	0	0
1Dh	UNIX Time 2	R/WP	0	0	0	0	0	0	0	0
1Eh	UNIX Time 3	R/WP	0	0	0	0	0	0	0	0
1Fh	User RAM 1	R/WP	0	0	0	0	0	0	0	0
20h	User RAM 2	R/WP	0	0	0	0	0	0	0	0
21h	Password 1	W	0	0	0	0	0	0	0	0
22h	Password 2	W	0	0	0	0	0	0	0	0
23h	Password 3	W	0	0	0	0	0	0	0	0
24h	Password 4	W	0	0	0	0	0	0	0	0
25h	EEPROM Addr.	R/WP	0	0	0	0	0	0	0	0
26h	EEPROM Data	R/WP	X	X	X	X	X	X	X	X
27h	EEPROM Com.	WP	0	0	0	0	0	0	0	0
28h	ID	R	Preconfigured Value				Preconfigured Value			
29h and 2Ah	Non-existing		Non-existing RAM address (will be skipped by address pointer)							
2Ch to 2Fh	RESERVED	Prot.	RESERVED (not readable, but normal address pointer incrementing)							
38h to 3Fh	RESERVED	Prot.	RESERVED (not readable, but normal address pointer incrementing)							
X = not defined										

Default values on delivery; Configuration EEPROM with RAM mirror, Address 2Bh and 30h to 37h:

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
2Bh	EEPROM RESERVED	R/WP	0	0	0	0	0	0	0	0
30h	EEPROM PW Enable	R/WP	0	0	0	0	0	0	0	0
31h	EEPROM Password 0	WP	0	0	0	0	0	0	0	0
32h	EEPROM Password 1	WP	0	0	0	0	0	0	0	0
33h	EEPROM Password 2	WP	0	0	0	0	0	0	0	0
34h	EEPROM Password 3	WP	0	0	0	0	0	0	0	0
35h	EEPROM Clkout	R/WP	1	1	0	0	0	0	0	0
36h	EEPROM Offset	R/WP	0	0	0	0	0	0	0	0
37h	EEPROM Backup	R/WP	0	0	0	1	0	0	0	0

Default values on delivery; User EEPROM, Address 00h to 2Ah:

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
00h to 2Ah	User EEPROM (43 Bytes)	R/WP	00h							

Default values on delivery; Manufacturer EEPROM, Address 2Ch to 2Fh and 38h to 3Fh:

Address	Function	Conv.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
2Ch to 2Fh	EEPROM RESERVED	Prot..	XXh							
38h to 3Fh	EEPROM RESERVED	Prot..	XXh							
X = not defined										

RV-3028-C7 reset values after power on (RAM) and default values on delivery (EEPROM):

RAM, reset values:

Time (hh:mm:ss)	=	00:00:00
Date (YY-MM-DD)	=	00-01-01
Weekday	=	0
Hour mode	=	24 hour mode (0 to 23)
Count TS	=	0 (read only)
Time TS (hh:mm:ss)	=	00:00:00 (read only)
Date TS (YY-MM-DD)	=	00-00-00 (read only)
UNIX Time	=	00000000h
Alarm function	=	disabled, weekday is selected
Timer function	=	disabled, Timer Frequency = 4096 Hz, Single Mode selected
Update function	=	Second update is selected
Ext. Event function	=	LOW level is regarded as External Event on pin EVI, filtering on EVI pin disabled, first event recorded is enabled
Time Stamp function	=	disabled, Ext. Event selected, Time Stamp overwrite disabled, Time Stamp Reset disabled
EEPROM Memory Refresh	=	enabled
Reset function	=	disabled
Interrupts	=	disabled
EEbusy status bit	=	1 → 0 (1 for the time of ~66 ms, then it is cleared to 0 automatically)
EVF Flag	=	0 or 1 (0 if High level is detected on EVI pin; 1 if Low level is detected)
PORF Flag	=	1 (can be cleared by writing 0 to the bit)
Int. Controlled Clock	=	disabled, no interrupt selected
Password	=	00000000h (write only)
EEPROM Address	=	00h
EEPROM Data	=	XXh
EEPROM Commands	=	00h (first command) (write only)
ID	=	Preconfigured Value (read only)
General Purpose Bits	=	0 (7 bits)
User RAM 1, 2	=	00h (2 bytes)

Configuration EEPROM with RAM mirror, default values on delivery:

EEPROM RESERVED	=	Preconfigured Value (must not be overwritten)
EEPROM Password Enable	=	disabled
EEPROM Password	=	00000000h (write only)
CLKOUT	=	enabled, synchronization enabled, F = 32.768 kHz
Power On Reset Interrupt	=	disabled
EEOffset value	=	0 (9 bits)
Backup Switchover	=	disabled, interrupt disabled, Fast Edge Detection enabled
Trickle charger	=	disabled, TCR = 1 kΩ selected

User EEPROM, default values on delivery:

User EEPROM (43 Bytes)	=	00h
------------------------	---	-----

Manufacturer EEPROM, Address 2Ch to 2Fh and 38h to 3Fh, default values on delivery:

EEPROM RESERVED	=	XXh (protected)
-----------------	---	-----------------

4. DETAILED FUNCTIONAL DESCRIPTION

4.1. POWER ON RESET (POR)

The power on reset (POR) is generated at start-up (see POWER ON AC ELECTRICAL CHARACTERISTICS). All RAM registers including the Counter Registers are initialized to their reset values and the Configuration EEPROM registers with the RAM mirror registers are set to their preset default values. At power up a refresh of the RAM mirror values by the values in the Configuration EEPROM is automatically generated. The time of this first refreshment is ~66 ms. The EEbusy bit in the Status register (0Eh) can be used to monitor the status of the refreshment (see REGISTER RESET VALUES SUMMARY).

The Power On Reset Flag PORF indicates the occurrence of a voltage drop of the internal power supply voltage below V_{POR} threshold needed to cause the generation of the device POR. A PORF value of 1 indicates that the voltage had dropped below the threshold level V_{POR} and that the time information is corrupted. The value 1 is retained until a 0 is written by the user.

When PORIE bit (EEPROM 35h) is set and the PORF flag was cleared beforehand, an interrupt signal on \overline{INT} pin can be generated when a Power On Reset occurs (see POWER ON RESET INTERRUPT FUNCTION).

4.2. AUTOMATIC BACKUP SWITCHOVER FUNCTION

Basic Hardware Definitions:

- The RV-3028-C7 has two power supply pins.
 - V_{DD} is the main power supply input pin.
 - V_{BACKUP} is the backup power supply input pin.
- V_{DSSW} is the backup switchover threshold voltage. The typical value is 2.0 V.
- A debounce logic provides a 122 μ s – 183 μ s debounce time t_{DEB} , which will filter V_{DD} oscillation when the backup switchover will switch back from V_{BACKUP} to V_{DD} .
- The FEDE bit (EEPROM 37h) should always be set to 1, so that Fast Edge Detection (≥ 7 V/ms) is always enabled. – Default value on delivery

Switchover Modes:

The RV-3028-C7 has four backup switchover modes. The desired mode can be selected by the BSM field in the Configuration EEPROM, see EEPROM BACKUP REGISTER:

- BSM = 00. Backup switchover disabled (default value on delivery), see SWITCHOVER DISABLED.
- BSM = 01. Direct Switching Mode (DSM): when $V_{DD} < V_{BACKUP}$, switchover occurs from V_{DD} to V_{BACKUP} without requiring V_{DD} to drop below V_{DSSW} , see DIRECT SWITCHING MODE (DSM).
- BSM = 10. Standby mode: when $V_{DD} < V_{BACKUP}$ (backup battery charged, no V_{DD}), the device enters the standby mode and draw any current from the backup source, see STANDBY MODE.
- BSM = 11. Level Switching Mode (LSM): when $V_{DD} < V_{BACKUP}$ AND $V_{DD} < V_{DSSW}$ (AND $V_{BACKUP} > V_{DSSW}$), switchover occurs from V_{DD} to V_{BACKUP} , see LEVEL SWITCHING MODE (LSM).

Function Overview:

When a valid backup switchover condition occurs (direct or level switching mode) and the internal power supply switches to the V_{BACKUP} voltage (VBACKUP Power state) the following sequence applies:

- The Backup Switch Flag BSF is set and, if BSIE bit is 1 (EEPROM 37h), an interrupt will be generated on \overline{INT} pin and remains as long as BSF is not cleared to 0. If BSIE is 0 no interrupt will be generated (see AUTOMATIC BACKUP SWITCHOVER INTERRUPT FUNCTION).
- The I²C-bus interface is automatically disabled (high impedance) and reset.
- EVI input remains active for interrupt generation, interrupt driven clock output and time stamp function
- CLKOUT pin is held LOW during VBACKUP Power state.
- The interrupt output pin \overline{INT} remains active in VBACKUP Power state for any previously configured interrupt condition.
- Going into VBACKUP Power state can be used as a time stamp condition (see TIME STAMP FUNCTION).
- The backup switchover condition can also be used to enable the clock output on CLKOUT pin automatically, when again in VDD Power state (see AUTOMATIC BACKUP SWITCHOVER INTERRUPT FUNCTION).

The Backup Switch Flag BSF can be cleared using the I²C-bus interface as soon as the circuit resumes from VBACKUP Power state and switched back to V_{DD} .

Note: After the device has switched back from VBACKUP Power state to VDD Power state the I²C interface has to be reinitialized by sending a STOP followed by a START (see also I²C-BUS IN SWITCHOVER CONDITION).

4.2.1. SWITCHOVER DISABLED

The automatic backup switchover function is disabled when the BSM field (EEPROM 37h) is set to 00 (default value on delivery). Used when only one power supply is available.

- The power supply is applied on V_{DD} pin.
- V_{BACKUP} pin must be tied to V_{SS} with a 10 k Ω resistor.
- The battery flag BSF is always logic 0.

4.2.2.DIRECT SWITCHING MODE (DSM)

This mode is selected with BSM = 01 (EEPROM 37h).


- If $V_{DD} > V_{BACKUP}$ the internal power supply is V_{DD} .
- If $V_{DD} < V_{BACKUP}$ the internal power supply is V_{BACKUP} .

The Direct Switching Mode is useful in systems where V_{DD} is higher than V_{BACKUP} at all times (for example, $V_{DD} = 5.0\text{ V}$, $V_{BACKUP} = 3.5\text{ V}$). If the V_{DD} and V_{BACKUP} values are similar (for example, $V_{DD} = 3.3\text{ V}$, $V_{BACKUP} \geq 3.0\text{V}$), the Direct Switching Mode is not recommended.

In Direct Switching Mode, the power consumption is reduced compared to the Level Switching Mode (LSM) because the monitoring of V_{BACKUP} and V_{DDSW} is not performed (typical $I_{VDD:DIRECT} = 75\text{ nA}$).

Note that the circuit needs in worst case 2 ms to react when the mode is changed from Standby Mode or Backup Switchover Disabled to DSM.

Backup switchover in Direct Switching Mode and with Backup Switchover Interrupt enabled with BSIE = 1 (EEPROM 37h):

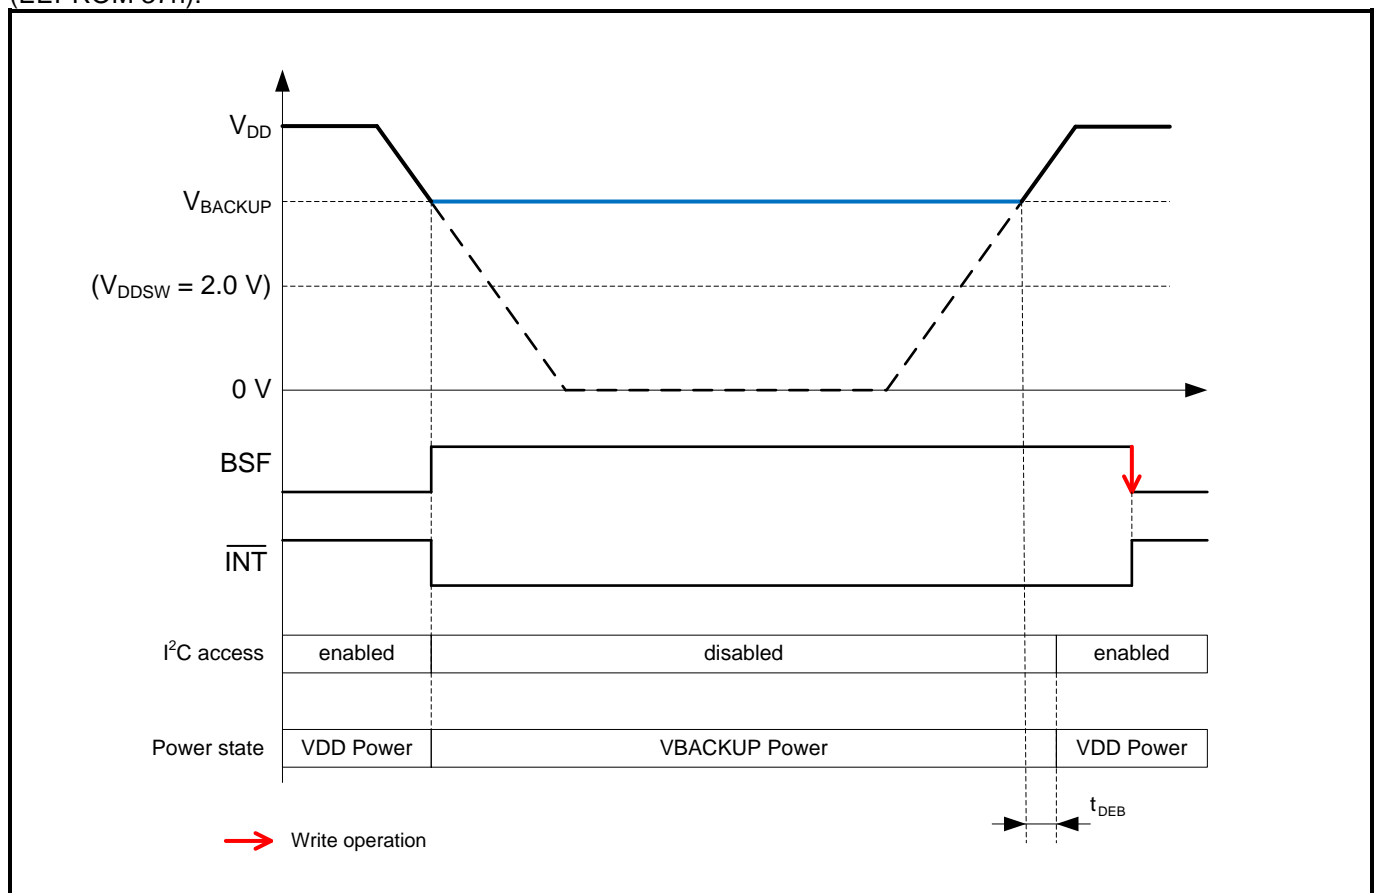

4.2.3. STANDBY MODE

When the device is first powered up from the backup supply (V_{BACKUP}) but without a main supply (V_{DD}), the device automatically enters the Standby Mode. In Standby Mode the device does not draw any power from the backup source until the device is powered up from the main power supply V_{DD} . It is also possible to enter into Standby Mode when the device is already supplied by the main power supply V_{DD} and a backup supply V_{BACKUP} is connected. To enter the Standby Mode, the BSM field (EEPROM 37h) has to be set logic 10. Then the main power supply V_{DD} must be removed. As a result of it, the device enters the Standby Mode and does not draw any current from the backup supply before it is powered up again from main supply V_{DD} and set to a switchover mode.

4.2.4. LEVEL SWITCHING MODE (LSM)


This mode is selected with BSM = 11 (EEPROM 37h).

- If $V_{DD} > V_{BACKUP}$ OR $V_{DD} > V_{DDSW}$, the internal power supply is V_{DD} .
- If $V_{DD} < V_{BACKUP}$ AND $V_{DD} < V_{DDSW}$ (AND $V_{BACKUP} > V_{DDSW}$), the internal power supply is V_{BACKUP} .

In Level Switching Mode, the power consumption is increased compared to the Direct Switching Mode (DSM) because of the monitoring of V_{BACKUP} and V_{DDSW} (typical $I_{VDD:LEVEL} = 95\text{ nA}$). See also typical characteristics in level switching mode in section OPERATING PARAMETERS.

Note that the circuit needs in worst case 15.625 ms to react when the mode is changed from Standby Mode or Backup Switchover Disabled to LSM.


Backup switchover in Level Switching Mode and with Backup Switchover Interrupt enabled with BSIE = 1 (EEPROM 37h):

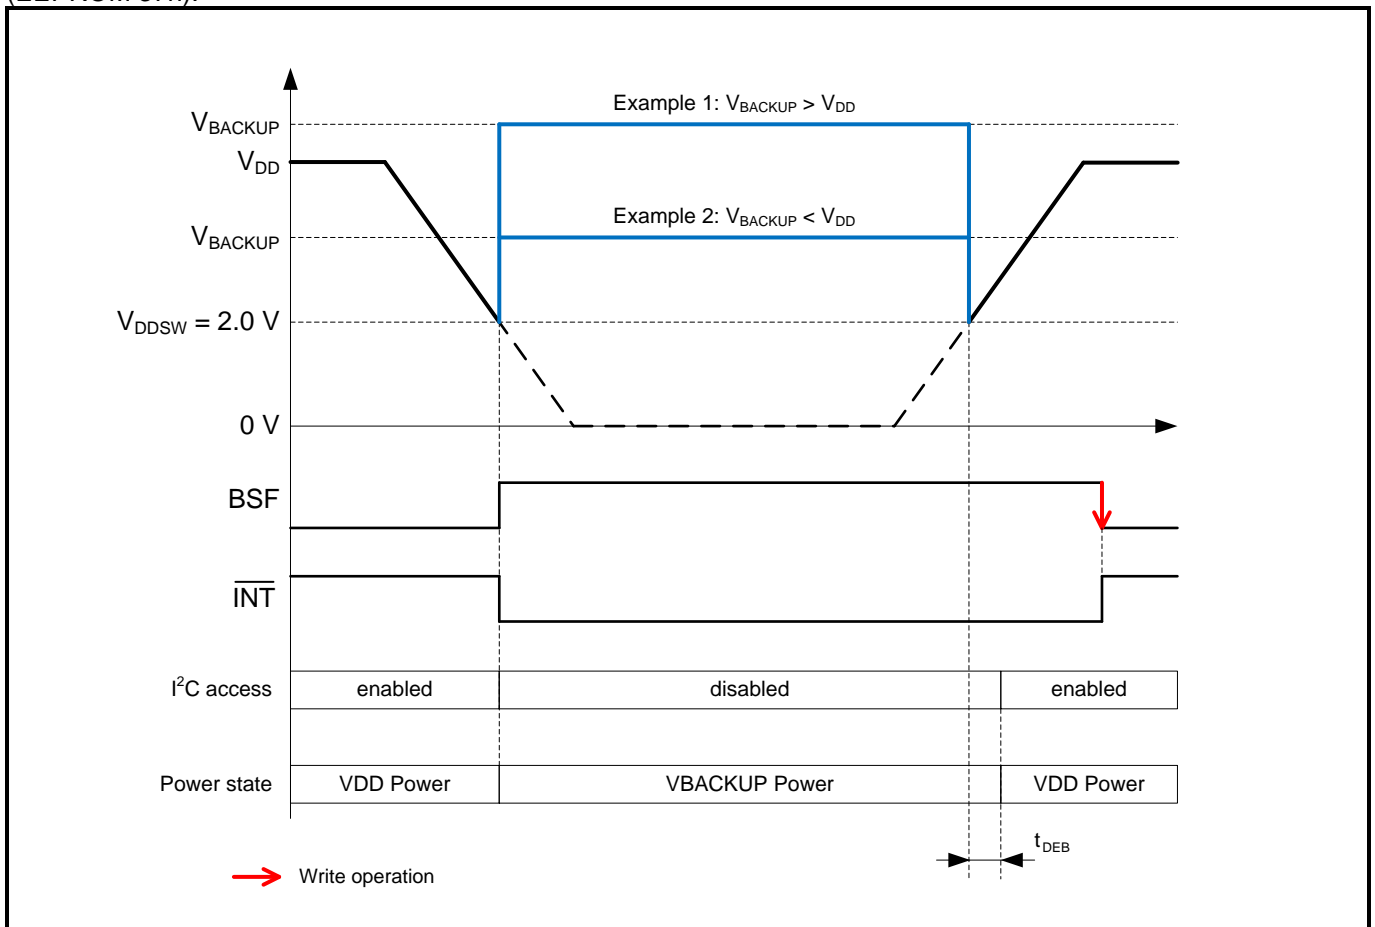

4.3. TRICKLE CHARGER

The device supporting the V_{BACKUP} pin include a trickle charging circuit which allows a battery or supercapacitor connected to the V_{BACKUP} pin to be charged from the power supply connected to the V_{DD} pin. The circuit of the Trickle Charger is shown in the following Figure. The Trickle Charger is enabled with bit TCE (EEPROM 37h). The series current limiting resistor is selected by the TCR field (EEPROM 37h) as shown in the Figure (default value on delivery is 1 k Ω). A schottky diode, with a typical voltage drop of 0.25 V, is inserted in the charging path.

Trickle Charger:

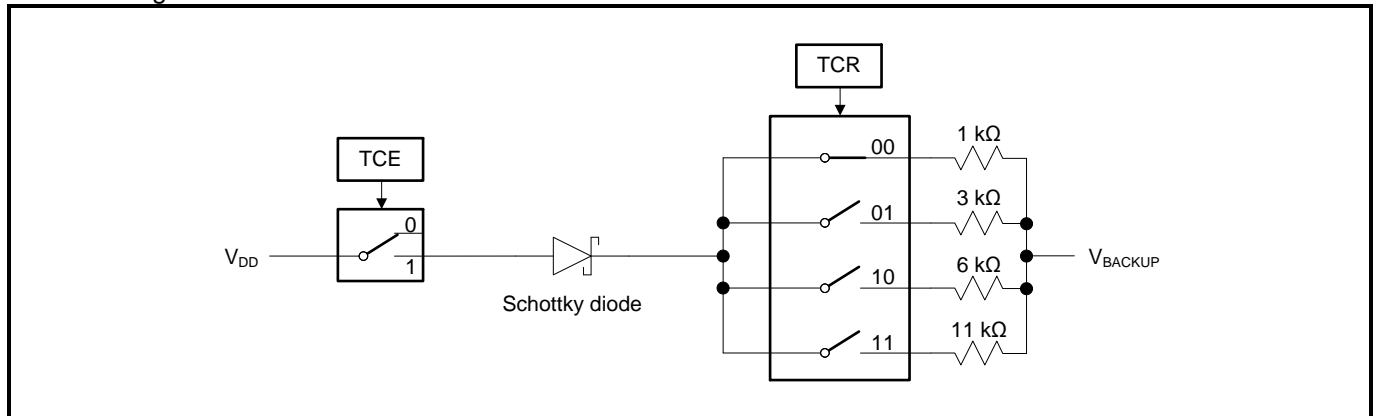

The trickle charger is disabled when the device is in VBACKUP Power state.

4.4. PROGRAMMABLE CLOCK OUTPUT

Six different frequencies or the countdown timer interrupt signal can be output on CLKOUT pin, the signal selection is done in the FD field (EEPROM 35h).

- 32.768 kHz, direct from Xtal oscillator, not tuned.
- 8192 Hz, 1024 Hz, 64 Hz, 32 Hz, 1 Hz; divided Xtal oscillator frequencies, digitally tuned according to the oscillator offset value EEOffset (EEPROM 36h and 37h).
- Timer interrupt is controlled by the Countdown Timer Control Registers and the Control 1 register.

The initial original clock signal (32.768 kHz) is initiated for switching on/off at his negative edge, a subsequently selected clock signal is taking over on his negative edge by controlling bits CLKF, CLKOE and FD field, in-between CLKOUT is tied to V_{SS} .

CLKOUT is tied to V_{SS} in VBACKUP Power state independent of the CLKOUT configuration settings.

The frequency output can be controlled directly via the I²C-bus interface commands (normal operation) or can be interrupt driven to allow waking up an external system by supplying a clock.

At POR the synchronization function is active since the bit CLKSY is set to 1 (default), the 32.768 kHz frequency is output to CLKOUT pin since the bit CLKOE is set to 1 (default) and FD field is set to 000 (default). Hint: These are the default values on delivery, stored in the Configuration EEPROM with RAM mirror. To customize these POR values, the user can change the values in the Configuration EEPROM.

4.4.1. CLKOUT FREQUENCY SELECTION

A programmable square wave is available at pin CLKOUT. Operation is controlled by the FD field (EEPROM 35h). Frequencies from 32.768 kHz (Default value on delivery) to 1 Hz and countdown timer interrupt can be generated for use as a system clock, microcontroller clock, input to a charge pump, or for calibration of the crystal oscillator.

Pin CLKOUT is a push-pull output that is enabled at power on (Default value on delivery). CLKOUT can be disabled by setting CLKOE bit to 0 or FD field to 111. When disabled, the CLKOUT pin is LOW.

The RESET bit function can affect the CLKOUT signal depending on the selected frequency. When 1 is written to the RESET bit and the CLKOUT is enabled, the CLKOUT pin goes LOW for the frequencies 1024 Hz to 1 Hz (for more details, see RESET BIT FUNCTION).

CLKOUT Frequency Selection:

FD	CLKOUT Frequency Selection	When 1 is written to the RESET bit
000	32.768 kHz –Default value on delivery	No effect
001	8192 Hz ⁽¹⁾	No effect
010	1024 Hz ⁽¹⁾	CLKOUT goes LOW
011	64 Hz ⁽¹⁾	CLKOUT goes LOW
100	32 Hz ⁽¹⁾	CLKOUT goes LOW
101	1 Hz ⁽¹⁾	CLKOUT goes LOW
110	Predefined periodic countdown timer interrupt ⁽¹⁾ ⁽²⁾	CLKOUT goes LOW
111	CLKOUT = LOW	No effect

⁽¹⁾ 8192 Hz to 1 Hz clock pulses and the timer interrupt pulses can be affected by correction pulses (see FREQUENCY OFFSET CORRECTION).
⁽²⁾ CLKSYS bit has no effect.

4.4.2. NORMAL CLOCK OUTPUT

Writing bit CLKOE to 1 will drive the selected frequency on CLKOUT, writing CLKOE to 0 will clear the selected frequency on CLKOUT.

4.4.3. INTERRUPT CONTROLLED CLOCK OUTPUT

Writing 1 to CLKIE the occurrence of the selected interrupt condition allows frequency output on CLKOUT. This function allows waking up an external system by outputting a clock.


Writing 0 to CLKIE will disable new interrupts from driving frequencies on CLKOUT, but if there is already an active interrupt driven frequency output (CLKF flag is set), the active frequency output will not be stopped. Writing the CLKF flag to 0 will clear the flag and frequency output will stop. Normal and Interrupt controlled clock output can be activated concurrently.

4.4.4.SYNCHRONIZED ENABLE/DISABLE

The enabled Synchronized CLKOUT Enable/Disable function (CLKSY = 1) consists of two sub-functions.

- Synchronized CLKOUT enable. For enabling clock output on CLKOUT pin the internal first negative clock edge of the selected clock source (FD field) is detected after CLKF or CLKOE are set.
- Synchronized CLKOUT disable. Clock output on CLKOUT will be disabled at the next negative clock edge of the selected clock source (FD field) after both CLKF and CLKOE are cleared and after the I²C-bus interface stop condition. When disabled, CLKOUT is tied to V_{SS}.
(CLKF and CLKOE = 0 → disable condition → next negative clock edge → CLKOUT driven to V_{SS})

Synchronized CLKOUT Enable/Disable times (CLKSY = 1):

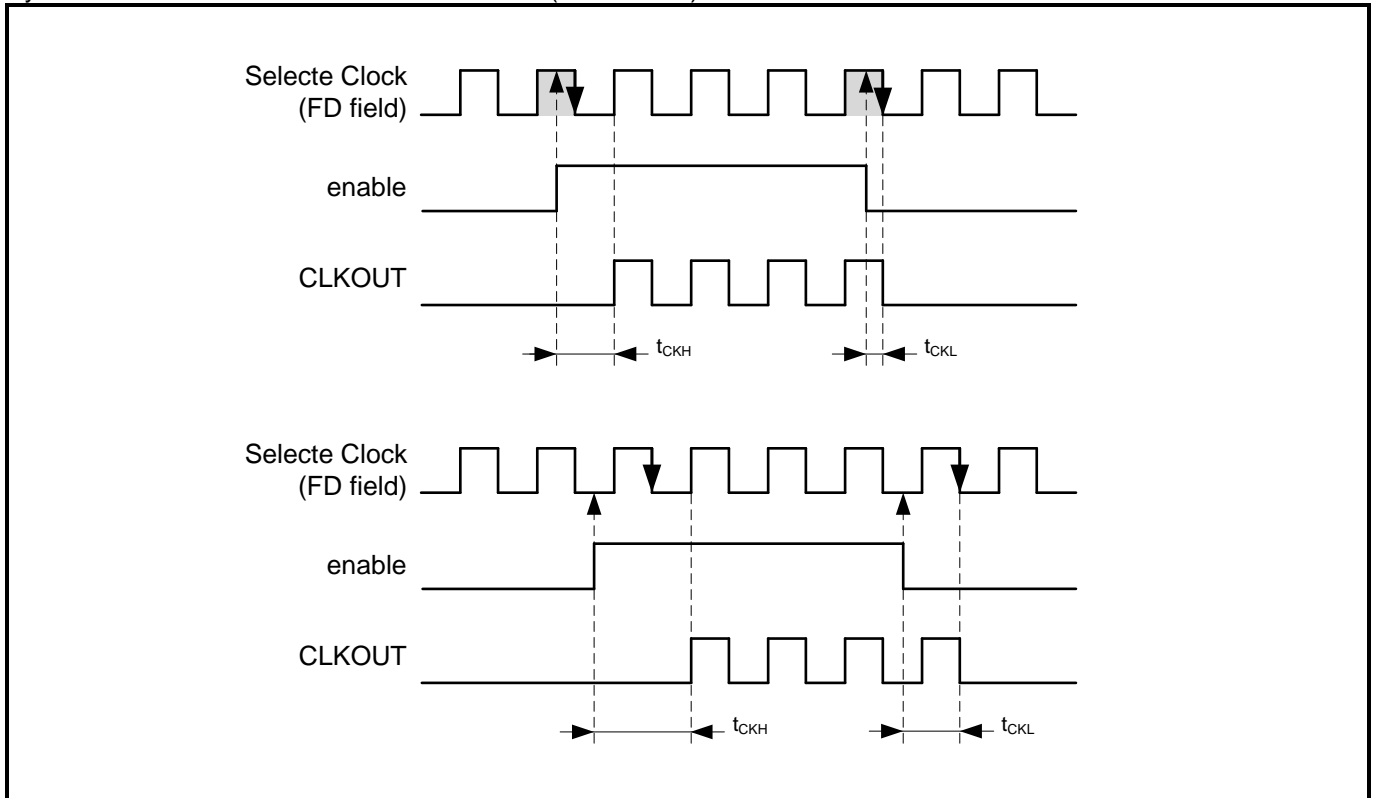


Hint: Glitch free frequency change on CLKOUT requires clearing flag CLKF and bit CLKOE to 0 before the new clock is selected in FD field.

(CLKF and CLKOE = 0 → disable condition → next negative clock edge → CLKOUT driven to V_{SS} → FD field selection → CLKF and/or CLKOE = 1 → enable condition → next negative clock edge)


4.4.5.CLOCK OUTPUT SCHEME

Complete frequency output scheme:

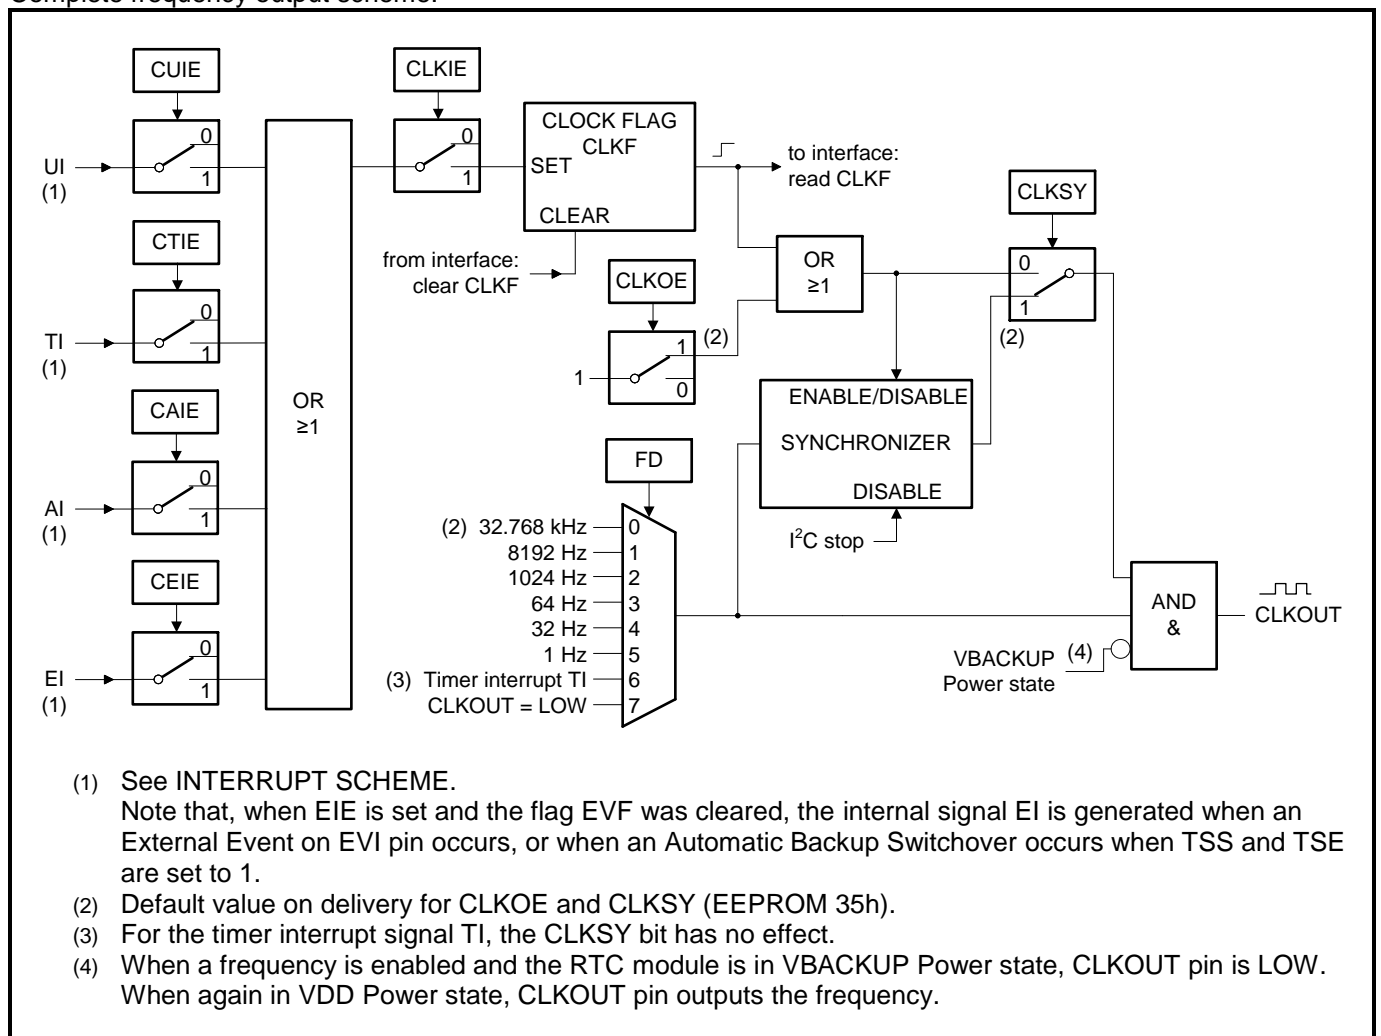

4.5. SETTING AND READING THE TIME

Data flow and data dependencies starting from the 1 Hz clock tick:

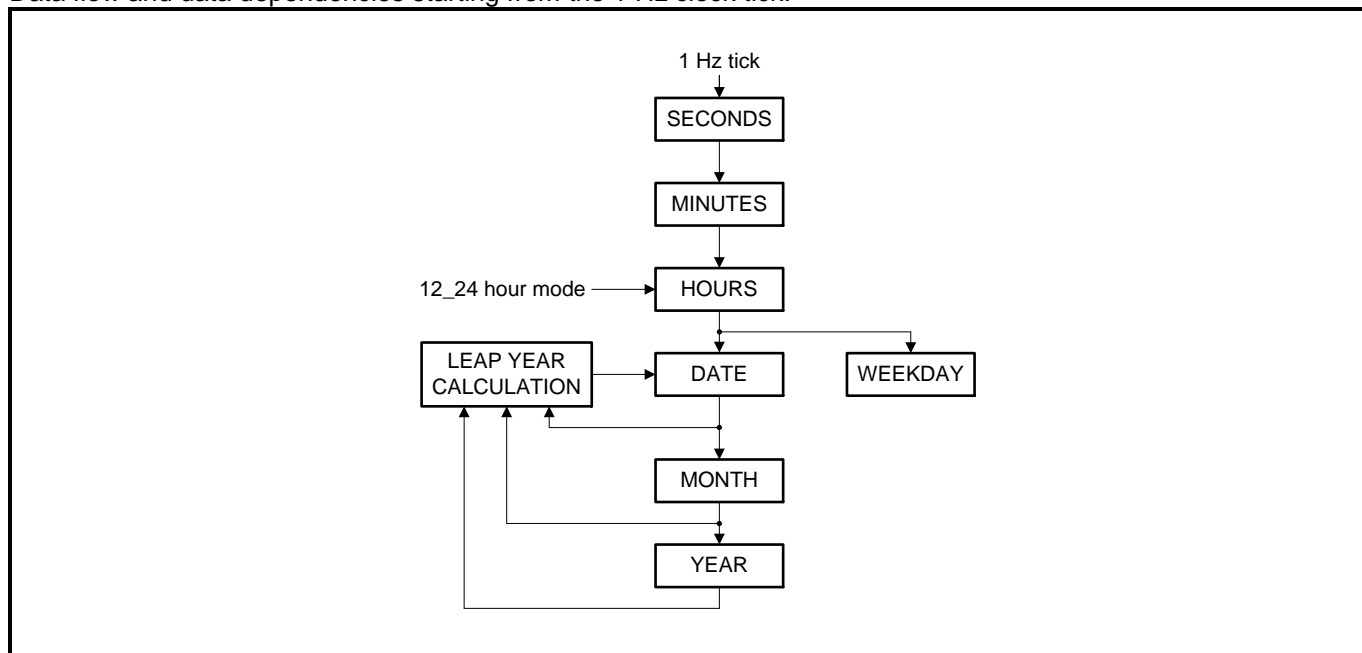


During read/write operations, all clock and calendar registers (00h to 06h) are blocked for 950 ms second. The clock counter increment (1 Hz tick) is inhibited during I²C access to the RV-3028-C7 to allow coherent data values. A counter increment (maximum one 1 Hz tick) occurring during inhibition time is memorized and will be realized after the I²C stop condition.

Exception: If during the inhibition time the Seconds register was written by an I²C command the prescaler from 4096 Hz to 1 Hz will be reset. Resetting the prescaler will have an influence on the length of the current clock period on all subsequent peripherals (clock and calendar, CLKOUT, timer clock, update timer clock, UNIX clock, EVI input filter). Writing to the Seconds register has the same effect as setting RESET bit to 1 (see RESET BIT FUNCTION).

When the read/write access has been terminated within 950 milliseconds (t < 950 ms), the time circuit is de-blocked immediately and any pending request to increment the time counters that occurred during a read access is correctly applied. Maximal one 1 Hz tick can be handled (see following Figure).

Access time for read/write operations:

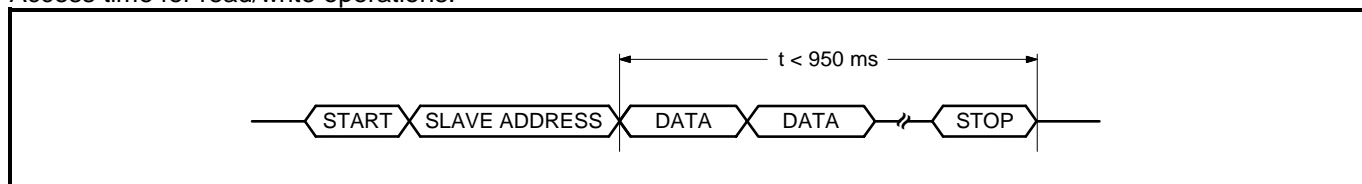

Because of this method, it is very important to make a read or write access in one go, that is, setting or reading seconds through to years should be made in one single access. Failing to comply with this method could result in the time becoming corrupted.

4.5.1.SETTING THE TIME

Advantage of register blocking during setting the time:

- Register blocking prevents faulty writing to the clock and calendar during an I²C write access (no incrementing of time registers during the write access).
- A possible 1 Hz tick occurring during the write access will be dropped.

The divider chain is reset whenever the Seconds register is written. This feature can be used to make a synchronized time setting. The other method is to use the RESET BIT FUNCTION.

4.5.2.READING THE TIME

Advantage of register blocking and memorization of one 1 Hz tick during reading the time:

- Register blocking prevents faulty reading of the clock and calendar during an I²C read access (no incrementing of time registers during the read access).
- After reading, one memorized 1 Hz tick can be handled. Clock and calendar are updated.
- No second reading is needed. The read data are coherent.

Hint: The UNIX Time counter does not know such register blocking (see UNIX TIME COUNTER).

4.6. EEPROM READ/WRITE

4.6.1.POR REFRESH (ALL CONFIGURATION EEPROM → RAM)

Read of all Configuration EEPROM registers at Power On Reset (POR):

At power up a refresh of the RAM mirror values by the values in the Configuration EEPROM is automatically generated (see REGISTER RESET VALUES SUMMARY). The time of this first refreshment is ~66 ms. The EEbusy bit in the register Status (0Eh) can be used to monitor the status of the refreshment.

4.6.2.AUTOMATIC REFRESH (ALL CONFIGURATION EEPROM → RAM)

Read all Configuration EEPROM registers automatically:

- To keep the integrity of the configuration data, all data of the Configuration RAM are refreshed by the data in the Configuration EEPROM each 24 hours, at date increment (1 second before midnight).
- Refresh is only active when RV-3028-C7 is not in VBACKUP mode and not disabled by EERD (EEPROM Memory Refresh Disable) bit.

4.6.3.REFRESH (ALL CONFIGURATION EEPROM → RAM)

Read all Configuration EEPROM registers:

- Before starting to read the configuration stored in the EEPROM, the auto refresh of the registers from the EEPROM has to be disabled by writing 1 into the EERD control bit.
- Then the actual configuration can be read from the Configuration EEPROM registers, writing the command 00h into the register EEcmd, and then the second command 12h into the register EEcmd will start the copy of the configuration into the RAM.
- When the transfer is finished (EEbusy = 0), the user can enable again the auto refresh of the registers by writing 0 into the EERD bit in the Control 1 register.

4.6.4.UPDATE (ALL CONFIGURATION RAM → EEPROM)

Write to all Configuration EEPROM registers:

- Before starting to change the configuration stored in the EEPROM, the auto refresh of the registers from the EEPROM has to be disabled by writing 1 into the EERD control bit.
- Then the new configuration can be written into the configuration RAM registers, when the whole new configuration is in the registers, writing the command 00h into the register EEcmd, then the second command 11h into the register EEcmd will start the copy of the configuration into the EEPROM.
- When the transfer is finished (EEbusy = 0), the user can enable again the auto refresh of the registers by writing 0 into the EERD bit in the Control 1 register.

4.6.5.READ ONE EEPROM BYTE (EEPROM → RAM-EEdata)

Read one EEPROM byte from Configuration EEPROM or User EEPROM registers:

- Before starting to read a byte in the EEPROM, the auto refresh of the registers from the EEPROM has to be disabled by writing 1 into the EERD control bit.
- To read a single byte from EEPROM, the address to be read from is put in the EEaddr register, then the command 00h is written in the EEcmd register, then the second command 22h is written in the EEcmd register and the resulting byte can be read from the EEdata register.
- When the transfer is finished (EEbusy = 0), the user can enable again the auto refresh of the registers by writing 0 into the EERD bit in the Control 1 register.

4.6.6.WRITE TO ONE EEPROM BYTE (RAM-EEdata → EEPROM)

Write to one EEPROM byte of the Configuration EEPROM or User EEPROM registers:

- Before starting to change data stored in the EEPROM, the auto refresh of the registers from the EEPROM has to be disabled by writing 1 into the EERD control bit.


- To write a single byte to EEPROM, the address to be written to is put in the EEaddr register and the data to be written is put in the EEdata register, then the command 00h is written in the EEcmd register, then a second command 21h is written in the EEcmd register to start the EEPROM write.
- When the transfer is finished (EEbusy = 0), the user can enable again the auto refresh of the registers by writing 0 into the EERD bit in the Control 1 register.

4.6.7.EEBUSY BIT

The set EEBusy status bit (bit 7 in the Status register 0Eh) indicates that the EEPROM is currently handling a read or write request and will ignore any further commands until the current one is finished. At power up a refresh is automatically generated. The time of this first refreshment is ~66 ms. After the refreshment is finished; EEBusy is cleared to 0 automatically. The cleared EEBusy status bit indicates that the EEPROM transfer is finished.

To prevent access collision between the internal automatic EEPROM refresh cycle (EERD = 0) and external EEPROM read/write access through interface the following procedures can be applied.

- Set EERD = 1 Automatic EEPROM Refresh needs to be disabled before EEPROM access.
- Check for EEBusy = 0 Access EEPROM only if not busy.
- Clear EERD = 0 It is recommended to enable Automatic EEPROM Refresh at the end of read/write access.
- Write EEPROM Wait 10 ms after each written EEPROM register before checking for EEBusy = 0 to allow internal data transfer.

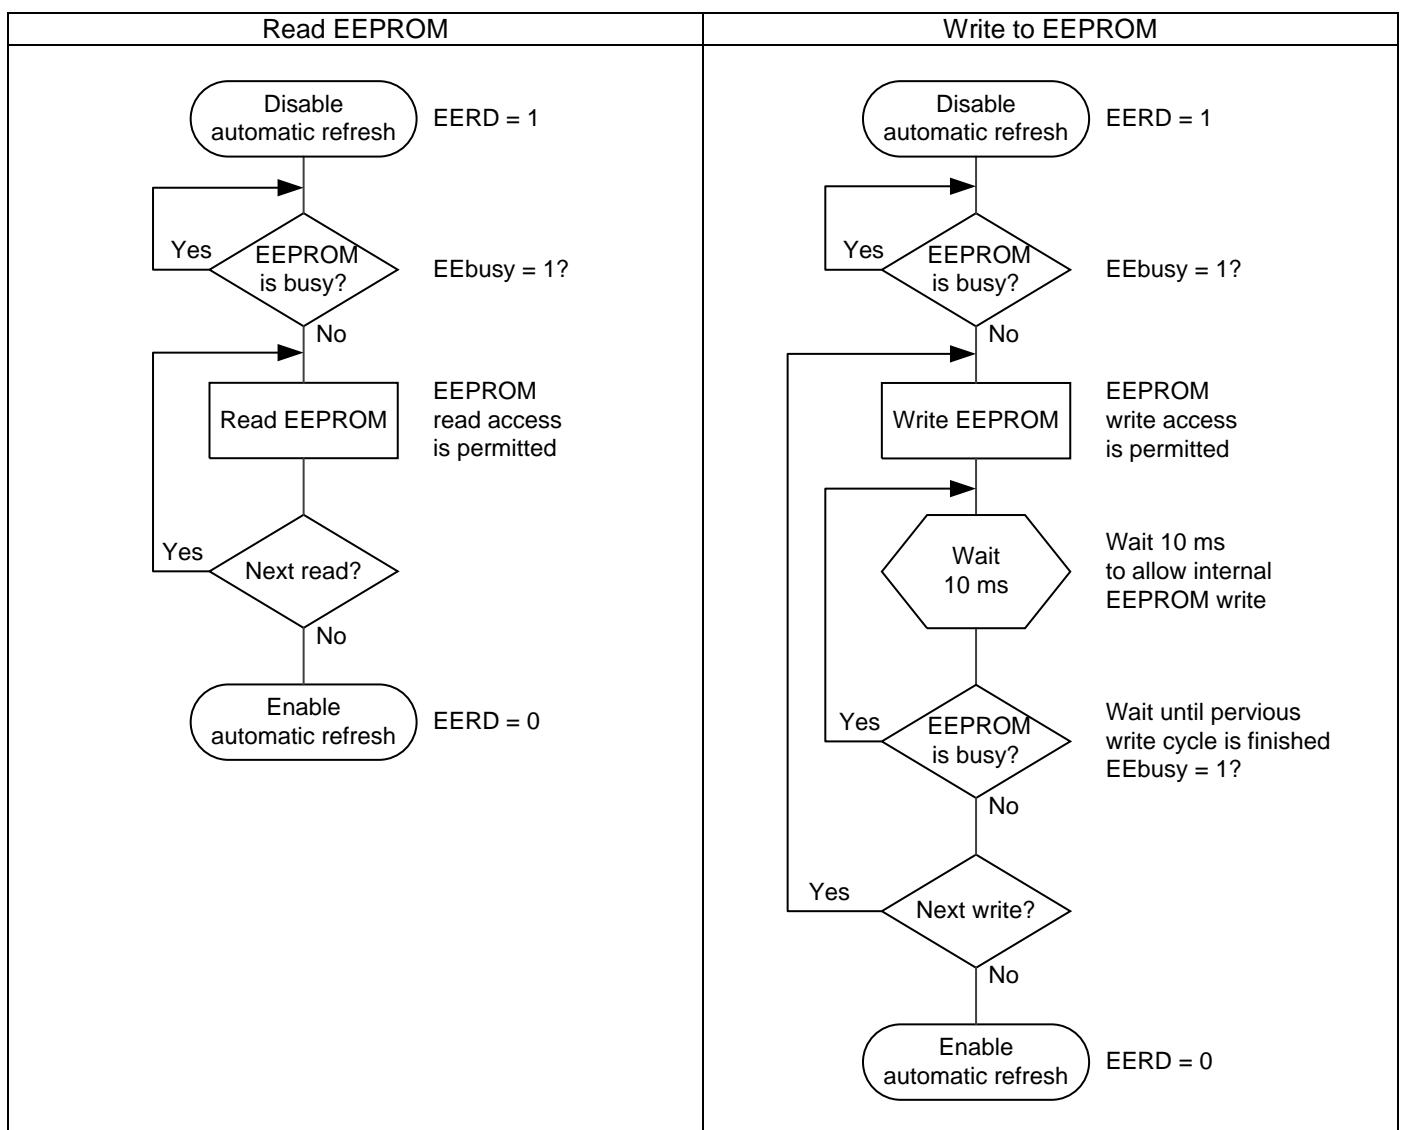

Note: In VDD Power state a minimum voltage of $V_{PROG} = 1.5\text{ V}$ during the whole EEPROM write procedure is required; i.e. until EEBusy = 0.

4.6.8. EEPROM READ/WRITE CONDITIONS

During a read/write of the EEPROM, if the V_{DD} supply drops, the device will continue to operate and communicate until a switchover to V_{BAT} occurs (in DSM or LSM mode). It is not recommended to operate during this time and all I²C communication should be halted as soon as V_{DD} failure is detected.

During the time that data is being written to the EEPROM, V_{DD} should remain above the minimum programming voltage $V_{PROG} = 1.5$ V. If at any time V_{DD} drops below this voltage, the data written to the device get corrupted.

To program the EEPROM, the backup switchover circuit must switch back to the main power supply V_{DD} . See also AUTOMATIC BACKUP SWITCHOVER FUNCTION.

4.7. USE OF THE CONFIGURATION EEPROM WITH RAM MIRROR REGISTERS

The best practice method to use the Configuration EEPROM with RAM mirror registers at addresses 2Bh and 30h to 37h is to make all Configuration settings in the RAM first and then to update all Configuration EEPROMs by the Update command $EEcmd = 11h$, see UPDATE (ALL CONFIGURATION RAM → EEPROM).

Edit the Configuration settings:

1. Enter the correct password PW ($PW = EEPW$) to unlock write protection (PW0 to PW3)
2. Disable automatic refresh ($EERD = 1$)
3. Edit Configuration settings (RAM)
 - a. For changing Password $EEPW$, see USER PROGRAMMABLE PASSWORD
4. Enter correct password PW ($PW = EEPW$) to unlock write protection (PW0 to PW3)
5. Update EEPROM (all Configuration RAM → EEPROM) with $EEcmd = 00h$ followed by 11h
6. Enable automatic refresh ($EERD = 0$)
7. Enter an incorrect password PW ($PW \neq EEPW$) to (PW0 to PW3) to lock the device

4.8. INTERRUPT OUTPUT

The interrupt pin $\overline{\text{INT}}$ can be triggered by six different functions:

- PERIODIC COUNTDOWN TIMER INTERRUPT FUNCTION
- PERIODIC TIME UPDATE INTERRUPT FUNCTION
- ALARM INTERRUPT FUNCTION
- EXTERNAL EVENT FUNCTION
- AUTOMATIC BACKUP SWITCHOVER INTERRUPT FUNCTION
- POWER ON RESET INTERRUPT FUNCTION

4.8.1. SERVICING INTERRUPTS


The $\overline{\text{INT}}$ pin can indicate six types of interrupts. It outputs the logic OR operation result of these interrupt outputs. When an interrupt is detected (when $\overline{\text{INT}}$ pin produces a negative pulse or is at low level), the TF, UF, AF, EVF, BSF and PORF flags can be read to determine which interrupt event has occurred.

To keep $\overline{\text{INT}}$ pin from changing to low level, clear the TIE, UIE, AIE, EIE and BSIE (EEPROM 37h) and PORIE (EEPROM 35h) bits. To check whether an event has occurred without outputting any interrupts via the $\overline{\text{INT}}$ pin, software can read the TF, UF, AF, EVF, BSF and PORF interrupt flags (polling).


Caution: The EVF flag is also set by an event of the Backup Switchover function when bits TSS and TSE are set to 1.

4.8.2. INTERRUPT SCHEME

Interrupt Scheme (Part 1)

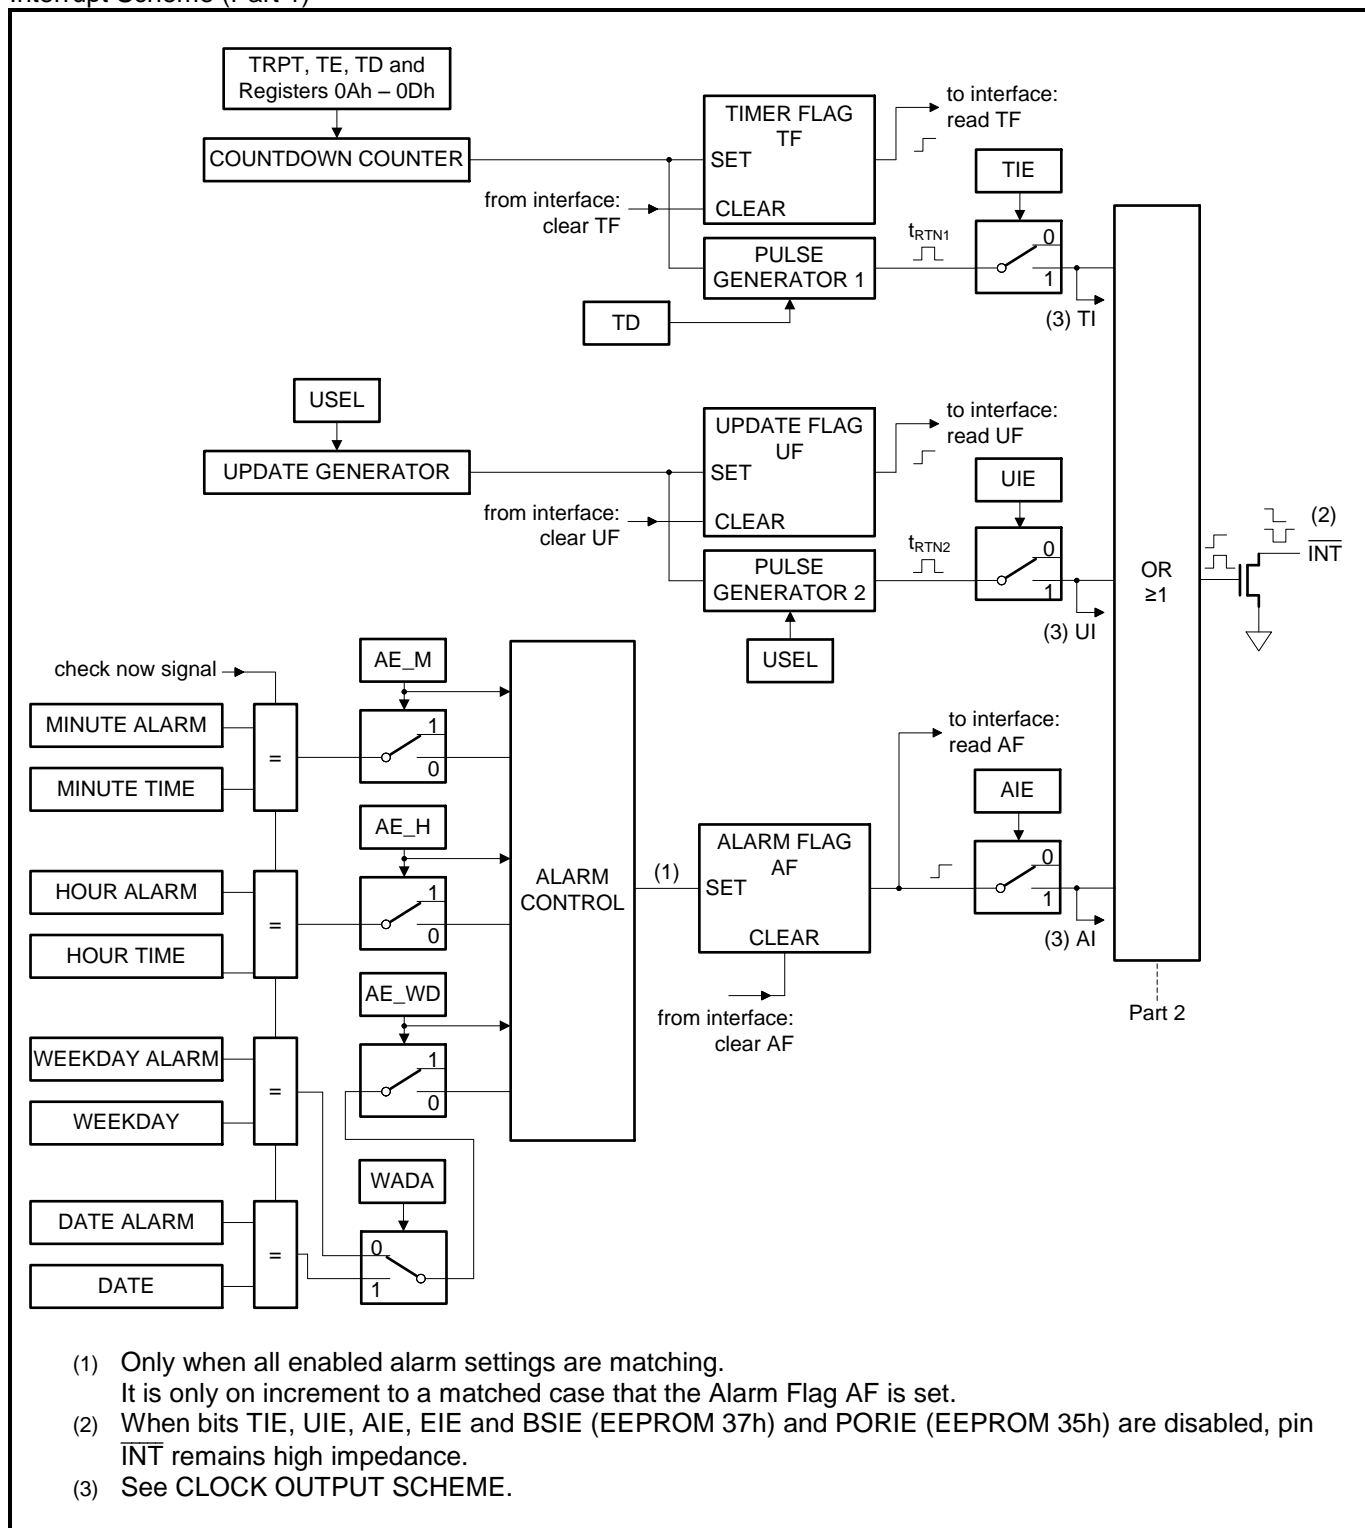

Interrupt Scheme (Part 2)

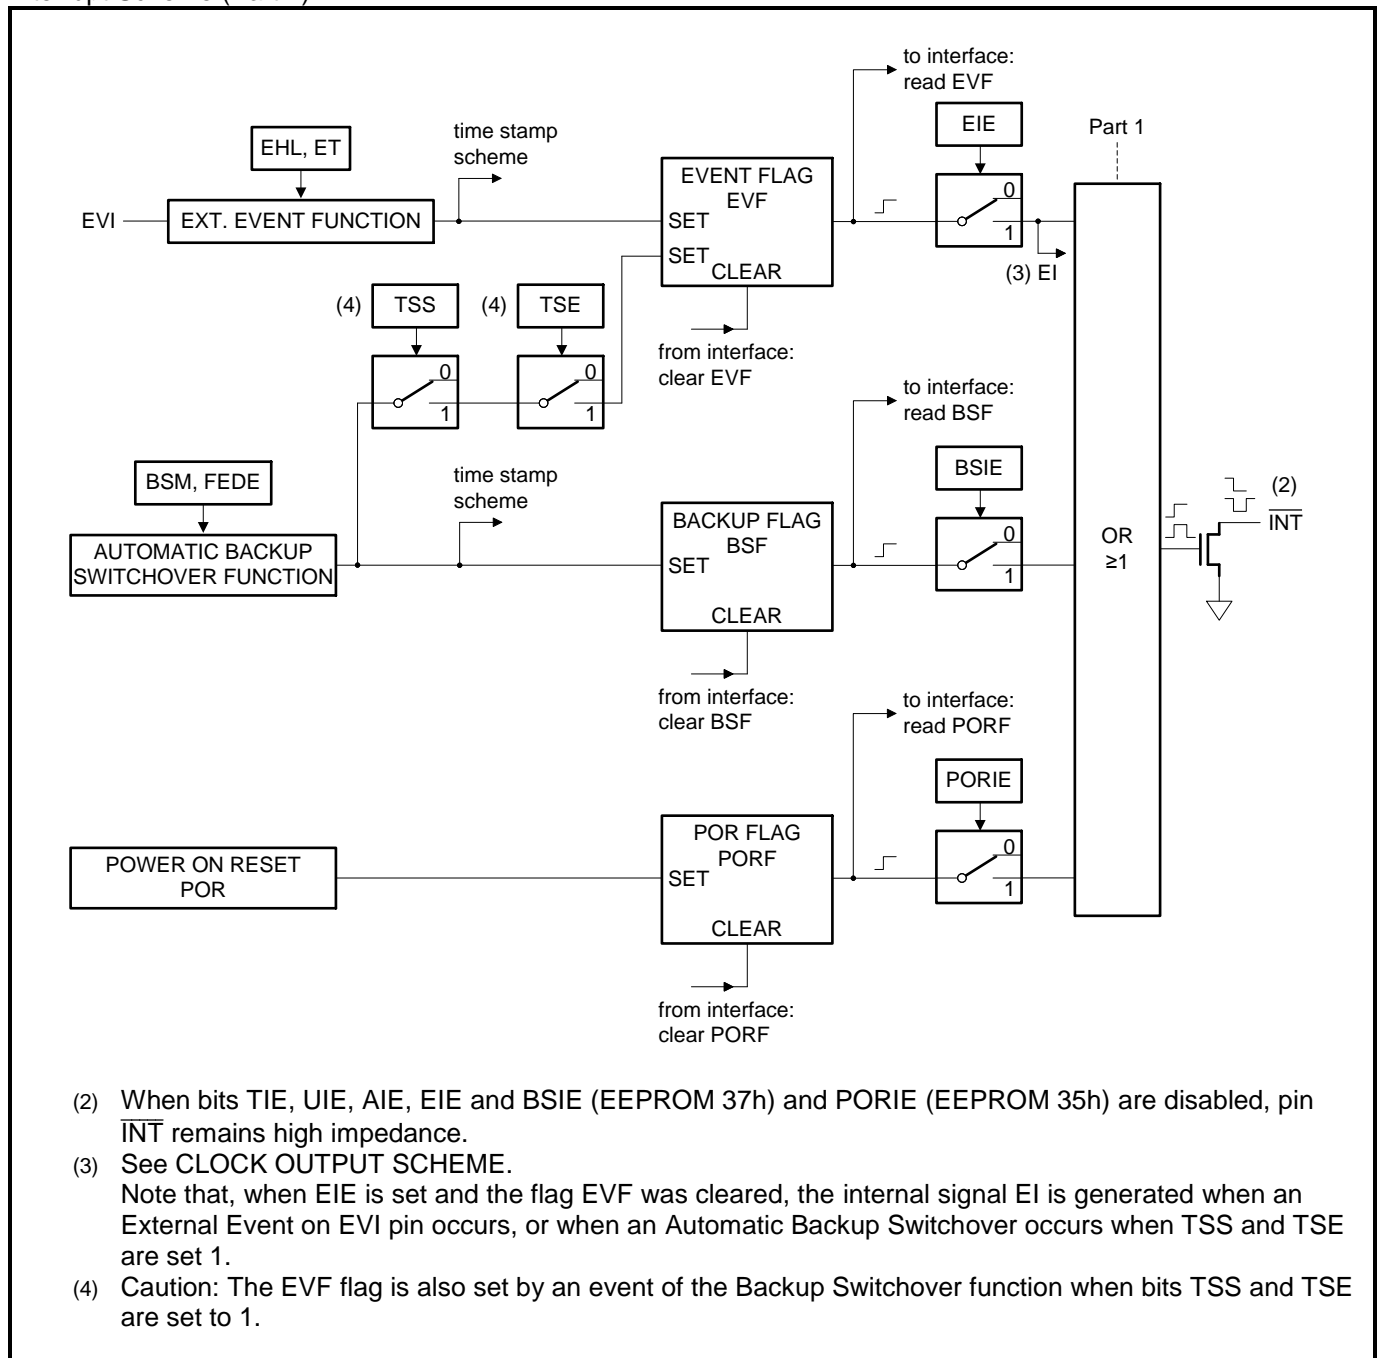

4.9. PERIODIC COUNTDOWN TIMER INTERRUPT FUNCTION

The Periodic Countdown Timer Interrupt function generates an interrupt event once or periodically at any period set from 244.14 μ s to 4095 minutes.

If TRPT is set to 0 (default), Single Mode is selected. In Single Mode the counter will stop after reaching 0 and bit TE will be reset.

TRPT bit has to be set to 1 if periodic countdown is needed (Repeat Mode). In Repeat Mode the timer will be reloaded with the Timer Value from the Timer Value 0 and Timer Value 1 registers. This will repeat until TE is cleared or TRPT will be set to 0. In later case the countdown will stop when the timer reaches 0 for the next time and TE will be cleared. Loading the Timer Value with 0 stops the timer, interrupt is cleared and the flag TF is reset.


When starting the countdown timer for the first time, only the first period does not have a fixed duration. The amount of inaccuracy for the first timer period depends on the selected source clock (see FIRST PERIOD DURATION).

When an interrupt event is generated, the $\overline{\text{INT}}$ pin goes to the low level and the TF flag is set to 1 to indicate that an event has occurred. The output on the $\overline{\text{INT}}$ pin is only effective if the TIE bit in the Control 2 register is set to 1. The low-level output signal on the $\overline{\text{INT}}$ pin is automatically cleared after the Auto reset time $t_{\text{RTN1}} \cdot t_{\text{RTN1}} = 122 \mu\text{s}$ (TD = 00) or $t_{\text{RTN1}} = 7.813 \text{ ms}$ (TD = 01, 10, 11).

When bit TIE is set to 1, the internal countdown timer interrupt pulse (TI) can be used to enable the clock output on CLKOUT pin automatically, when bits CTIE, CLKIE and CLKOE are set to 1 and a frequency is selected in the FD field. The interrupt pulses (TI) can even be used as CLKOUT frequency, when selecting 110 in the FD field (see CLOCK OUTPUT SCHEME).

4.9.1.PERIODIC COUNTDOWN TIMER DIAGRAM

Diagram of the Periodic Countdown Timer Interrupt function: In Repeat Mode (TRPT = 1). Countdown Timer Signal on CLKOUT (CLKOE = 1 and FD = 110).

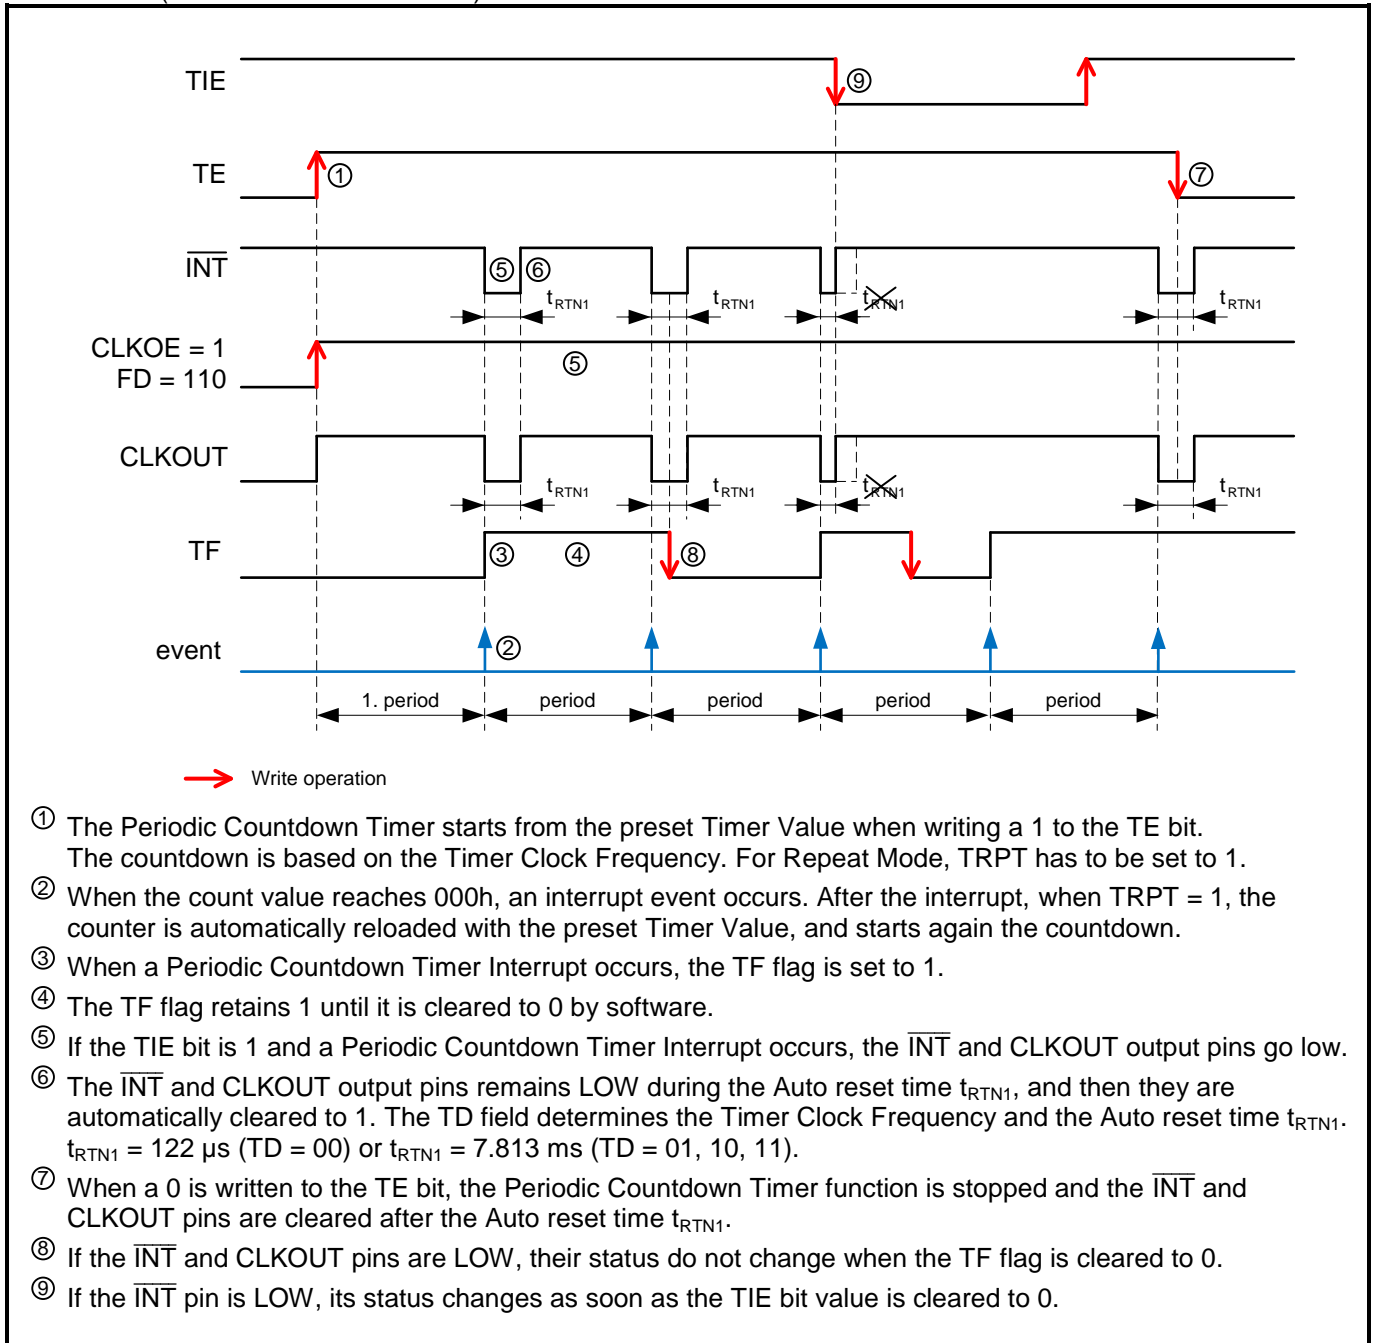

4.9.2.USE OF THE PERIODIC COUNTDOWN TIMER INTERRUPT

The following registers, fields and bits are related to the Periodic Countdown Timer Interrupt and Automatic Clock output function:

- Timer Value 0 Register (0Ah) (see PERIODIC COUNTDOWN TIMER CONTROL REGISTERS)
- Timer Value 1 Register (0Bh) (see PERIODIC COUNTDOWN TIMER CONTROL REGISTERS)
- Timer Status 0 Register (0Ch) (see PERIODIC COUNTDOWN TIMER CONTROL REGISTERS)
- Timer Status 1 shadow Register (0Dh) (see PERIODIC COUNTDOWN TIMER CONTROL REGISTERS)
- TF flag (see CONFIGURATION REGISTERS, 0Eh – Status)
- TRPT bit, TE bit and TD field (see CONFIGURATION REGISTERS, 0Fh – Control 1)
- TIE bit (see CONFIGURATION REGISTERS, 10h – Control 2)
- CTIE bit (see CONFIGURATION REGISTERS, 12h – Clock Interrupt Mask)

For selecting Countdown Timer Signal for CLKOUT pin (CLKOE = 1 and FD = 110):

- CLKOE bit and FD field (see EEPROM CLKOUT REGISTER)

Prior to entering any timer settings for the Periodic Countdown Timer Interrupt, it is recommended to write a 0 to the TIE and TE bits to prevent inadvertent interrupts on $\overline{\text{INT}}$ pin. When 1 is written to the RESET bit, the Periodic Countdown Timer Interrupt function is retarded. When the Periodic Countdown Timer Interrupt function is not used, one Timer Value register (0Ah) can be used as RAM byte. The Timer Clock Frequency selection field TD is used to set the countdown period (source clock) for the Periodic Countdown Timer Interrupt function (four settings are possible).

Procedure to use the Periodic Countdown Timer Interrupt function and Automatic Clock output function:

1. Initialize bits TE, TIE and TF to 0. In that order, to prevent inadvertent interrupts on $\overline{\text{INT}}$ pin.
2. Set TRPT bit to 1 if periodic countdown is needed (Repeat Mode).
3. Choose the Timer Clock Frequency and write the corresponding value in the TD field.
4. Choose the Countdown Period based on the Timer Clock Frequency, and write the corresponding Timer Value to the registers Timer Value 0 (0Ah) and Timer Value 1 (0Bh). See following table.
5. Set the TIE bit to 1 if you want to get a hardware interrupt on $\overline{\text{INT}}$ pin.
6. Set CTIE bit to 1 to enable clock output when a timer interrupt occurs. See also CLOCK OUTPUT SCHEME.
7. Set the TIE and CLKOE bits to 1 and the FD field to 110 if you want to get the timer signal on CLKOUT.
8. Set the TE bit from 0 to 1 to start the Periodic Countdown Timer. The countdown starts at the rising edge of the SCL signal after Bit 0 of the Address 0Fh is transferred. See subsequent Figure that shows the start timing.


Countdown Period in seconds:

$$\text{Countdown Period} = \frac{\text{Timer Value}}{\text{Timer Clock Frequency}}$$


Countdown Period:

Timer Value (0Ah and 0Bh)	Countdown Period			
	TD = 00 (4096 Hz)	TD = 01 (64 Hz)	TD = 10 (1 Hz)	TD = 11 (1/60 Hz)
0	-	-	-	-
1	244.14 μ s	15.625 ms	1 s	1 min
2	488.28 μ s	31.25 ms	2 s	2 min
:	:	:	:	:
41	10.010 ms	640.63 ms	41 s	41 min
205	50.049 ms	3.203 s	205 s	205 min
410	100.10 ms	6.406 s	410 s	410 min
2048	500.00 ms	32.000 s	2048 s	2048 min
:	:	:	:	:
4095 (FFFh)	0.9998 s	63.984 s	4095 s	4095 min

General countdown timer behavior:

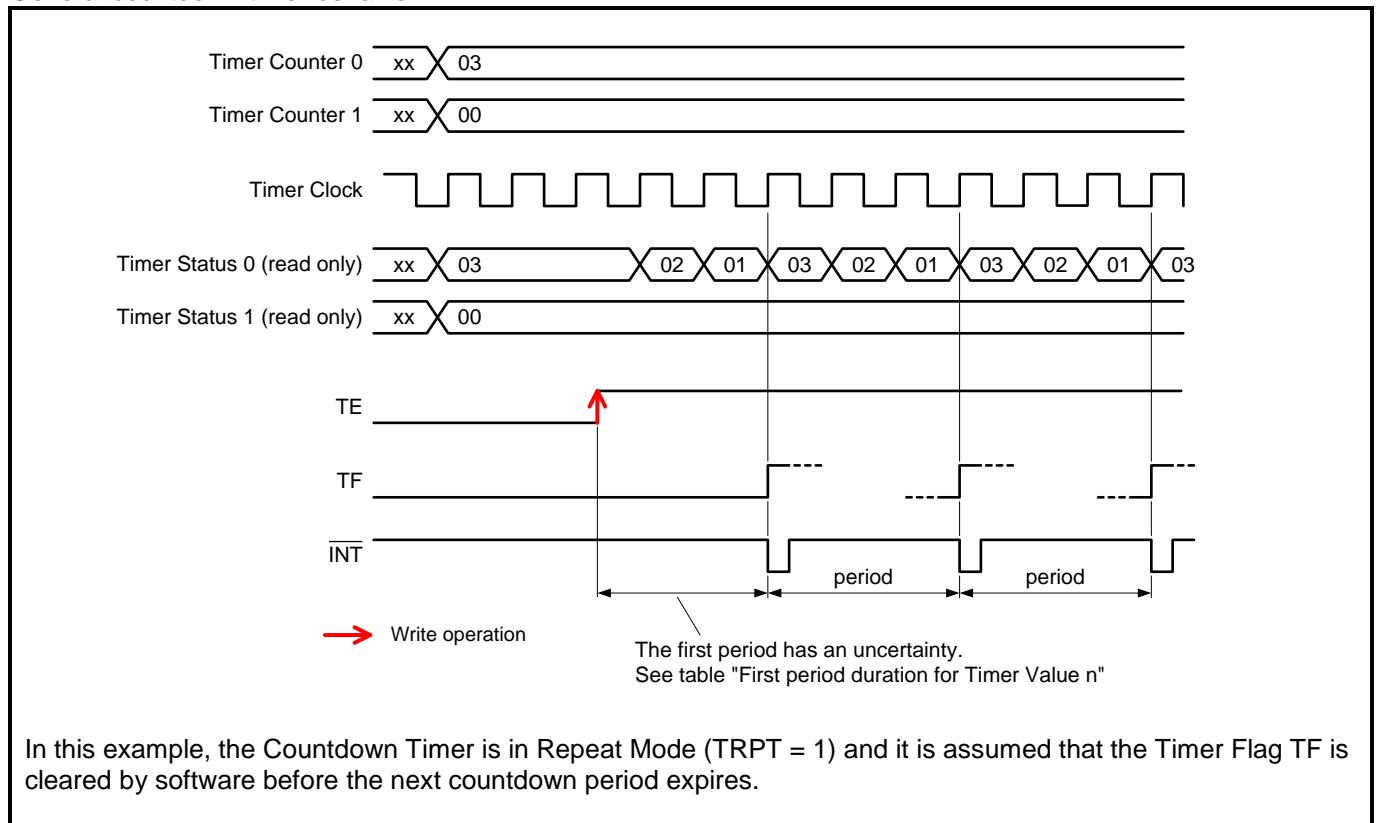

Start timing of the Periodic Countdown Timer:

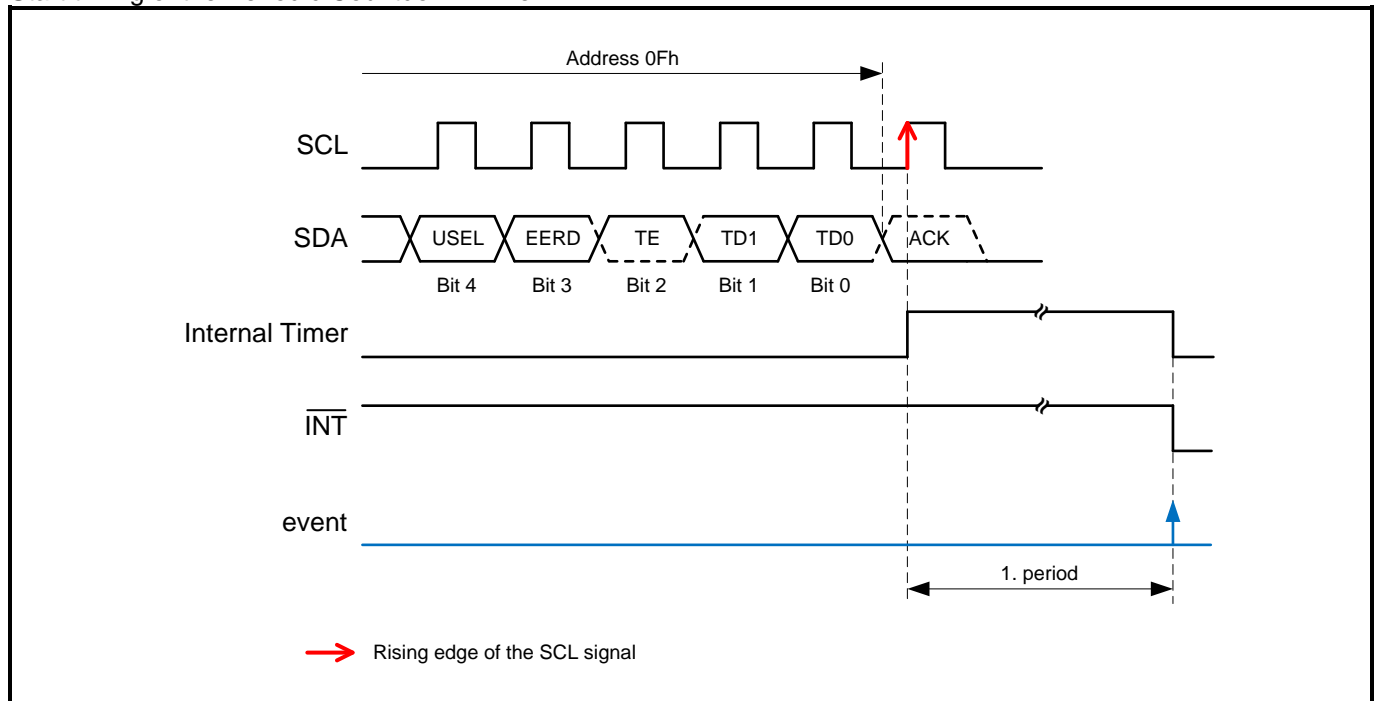

4.9.3.FIRST PERIOD DURATION

When the TF flag is set, it indicates that an interrupt signal on $\overline{\text{INT}}$ is generated if this mode is enabled. See Section INTERRUPT OUTPUT for details on how the interrupt can be controlled.

When starting the timer for the first time, the first period has an uncertainty. The uncertainty is a result of the enable instruction being generated from the interface clock which is asynchronous from the Timer Clock Frequency. Subsequent timer periods do not have such deviation. The amount of deviation for the first timer period depends on the chosen Timer Clock Frequency, see following Table.

First period duration for Timer Value $n^{(1)}$:

TD	Timer Clock Frequency	First period duration		Subsequent periods duration
		Minimum Period	Maximum Period	
00	4096 Hz	$n * 244 \mu\text{s}$	$(n + 1) * 244 \mu\text{s}$	$n * 244 \mu\text{s}$
01	64 Hz	$n * 15.625 \text{ ms}$	$(n + 1) * 15.625 \text{ ms}$	$n * 15.625 \text{ ms}$
10	1 Hz	$n * 1 \text{ s}$	$n * 1 \text{ s} + 15.625 \text{ ms}$	$n * 1 \text{ s}$
11	1/60 Hz	$n * 60 \text{ s}$	$n * 60 \text{ s} + 15.625 \text{ ms}$	$n * 60 \text{ s}$

⁽¹⁾ Timer Values n from 1 to 4095 are valid. Loading the counter with 0 stops the timer.

At the end of every countdown, the timer sets the Periodic Countdown Timer Flag (bit TF in Status Register). Bit TF can only be cleared by command. When enabled, a pulse is generated at the interrupt pin $\overline{\text{INT}}$.

When reading the Timer Value (Timer Value 0 and Timer Value 1), the preset value is returned and not the actual value. The actual value of the Periodic Countdown Timer can be read in the registers Timer Status 0 and Timer Status 1.

4.10. PERIODIC TIME UPDATE INTERRUPT FUNCTION


The Periodic Time Update Interrupt function generates an interrupt event periodically at the One-Second or the One-Minute update time, according to the selected timer source with bit USEL.

When an interrupt event is generated, the $\overline{\text{INT}}$ pin goes to the low level and the UF flag is set to 1 to indicate that an event has occurred. The output on $\overline{\text{INT}}$ pin is only effective if UIE bit in Control 2 register is set to 1. The low-level output signal on the $\overline{\text{INT}}$ pin is automatically cleared after the Auto reset time t_{RTN2} . $t_{\text{RTN2}} = 500 \text{ ms}$ (Second update) or $t_{\text{RTN2}} = 7.813 \text{ ms}$ (Minute update).

When bit UIE is set to 1, the internal update interrupt pulse (UI) can be used to enable the clock output on CLKOUT pin automatically, when bits CUIE, CLKIE and CLKOE are set to 1 and a frequency is selected in the FD field (see CLOCK OUTPUT SCHEME).

4.10.1. PERIODIC TIME UPDATE DIAGRAM

Diagram of the Periodic Time Update Interrupt function:

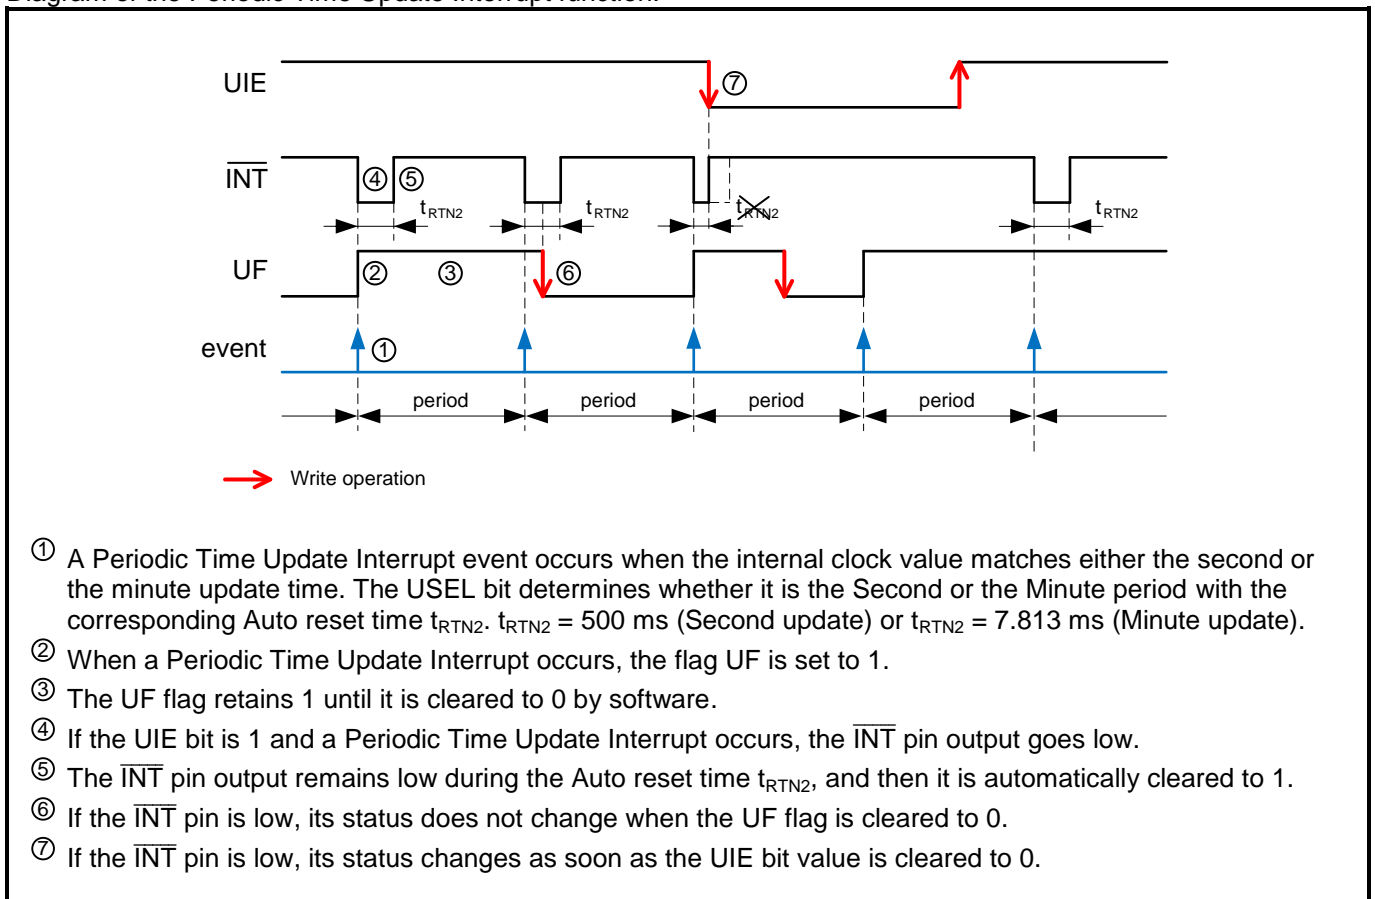

4.10.2. USE OF THE PERIODIC TIME UPDATE INTERRUPT

The following bits are related to the Periodic Time Update Interrupt and Automatic Clock output function:

- UF flag (see CONFIGURATION REGISTER, 0Eh – Status)
- USEL bit (see CONFIGURATION REGISTER, 0Fh – Control 1)
- UIE bit (see CONFIGURATION REGISTER, 10h – Control 2)
- CUIE bit (see CONFIGURATION REGISTERS, 12h – Clock Interrupt Mask)

Prior to entering any other settings, it is recommended to write a 0 to the UIE bit to prevent inadvertent interrupts on $\overline{\text{INT}}$ pin. The Periodic Time Update Interrupt function cannot be fully stopped, but by writing a 0 in the UIE bit, it prevents the occurrence of a hardware interrupt on the $\overline{\text{INT}}$ pin.

When 1 is written to the RESET bit (see CONFIGURATION REGISTER, 10h – Control 2) the divider chain is reset and the Periodic Time Update Interrupt will be retarded. The reset function only interrupts the Periodic Time Update Interrupt function but does not turn it off.

Procedure to use the Periodic Time Update Interrupt and Automatic Clock output function:

1. Initialize bits UIE and UF to 0.
2. Choose the timer source clock and write the corresponding value in the USEL bit.
3. Set the UIE bit to 1 if you want to get a hardware interrupt on $\overline{\text{INT}}$ pin.
4. Set CUIE bit to 1 to enable clock output when a time update interrupt occurs. See also CLOCK OUTPUT SCHEME.
5. The first interrupt will occur after the next event, either second or minute change.

4.11. ALARM INTERRUPT FUNCTION


The Alarm Interrupt function generates an interrupt for alarm settings such as weekday/date, hour and minute settings.

When an interrupt event is generated, the $\overline{\text{INT}}$ pin goes to the low level and the AF flag is set to 1 to indicate that an event has occurred. The output on the $\overline{\text{INT}}$ pin is only effective if the AIE bit in the Control 2 register is set to 1.

When bit AIE is set to 1, the internal alarm interrupt signal (AI) can be used to enable the clock output on CLKOUT pin automatically, when bits CAIE, CLKIE and CLKOE are set to 1 and a frequency is selected in the FD field (see CLOCK OUTPUT SCHEME).

4.11.1. ALARM DIAGRAM

Diagram of the Alarm Interrupt function:

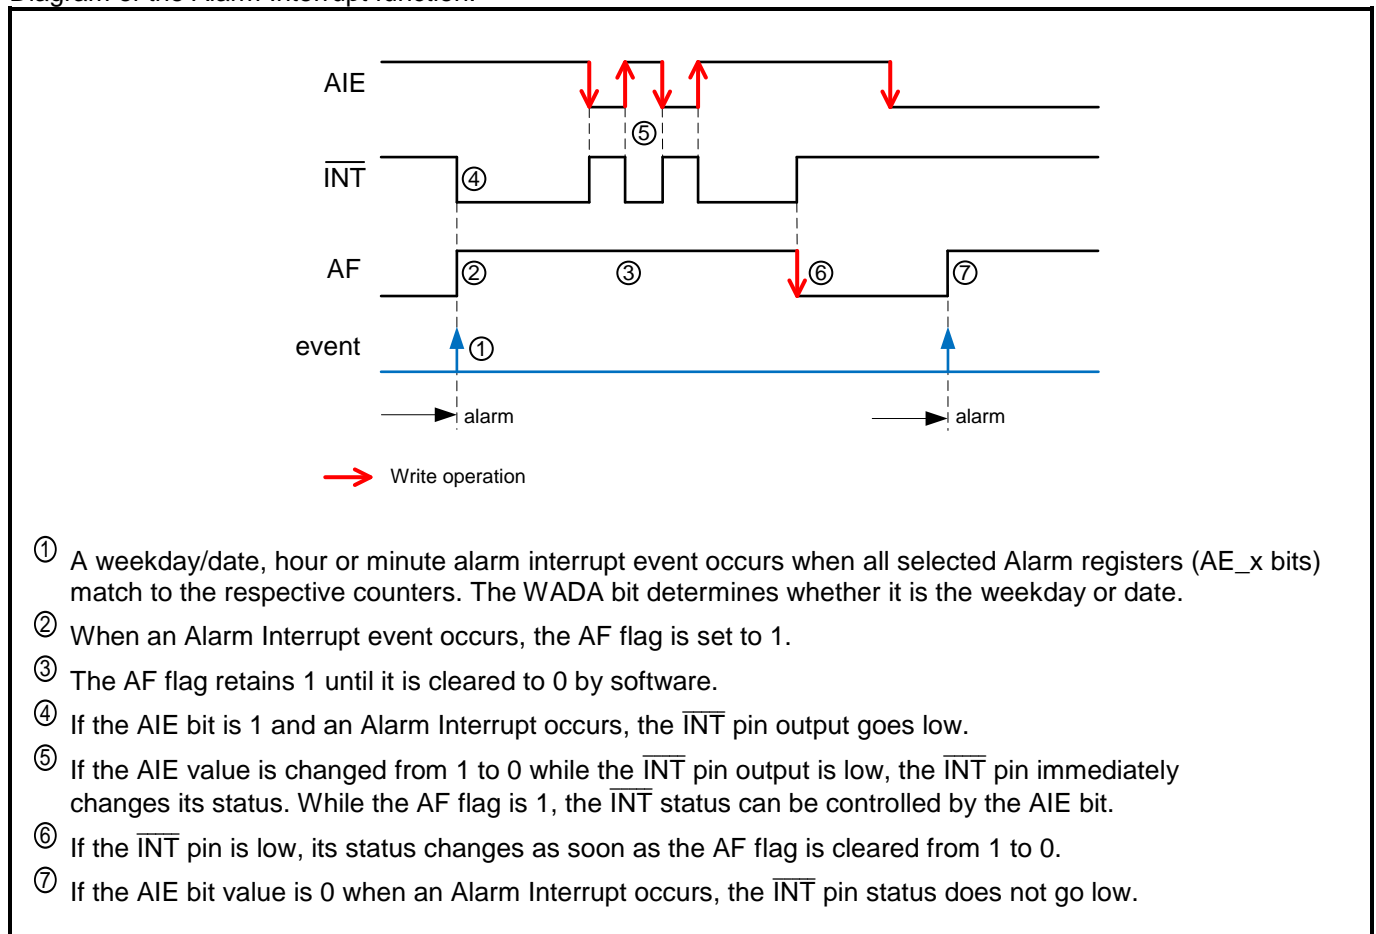

4.11.2. USE OF THE ALARM INTERRUPT

The following registers and bits are related to the Alarm Interrupt and Automatic Clock output function:

- Minutes Register (01h) (see CLOCK REGISTERS)
- Hours Register (02h) (see CLOCK REGISTERS)
- Weekday Register (03h) (see CALENDAR REGISTERS)
- Date Register (04h) (see CALENDAR REGISTERS)
- Minutes Alarm Register and AE_M bit (07h) (see ALARM REGISTERS)
- Hours Alarm Register and AE_H bit (08h) (see ALARM REGISTERS)
- Weekday/Date Alarm Register and AE_WD bit (09h) (see ALARM REGISTERS)
- AF flag (see CONFIGURATION REGISTER, 0Eh – Status)
- WADA bit (see CONFIGURATION REGISTERS, 0Fh – Control 1)
- AIE bit (see CONFIGURATION REGISTERS, 10h – Control 2)
- CAIE bit (see CONFIGURATION REGISTERS, 12h – Clock Interrupt Mask)

Prior to entering any timer settings for the Alarm Interrupt, it is recommended to write a 0 to the AIE bit to prevent inadvertent interrupts on $\overline{\text{INT}}$ pin. When 1 is written to the RESET bit, an Alarm Interrupt function event can be retarded. When the Alarm Interrupt function is not used, one Byte (07h) of the Alarm registers can be used as RAM byte. In such case, be sure to write a 0 to the AIE bit (if the AIE bit value is 1 and the Alarm register is used as RAM register, $\overline{\text{INT}}$ may change to low level unintentionally).

Procedure to use the Alarm Interrupt and Automatic Clock output function:

1. Initialize bits AIE and AF to 0.
2. Choose weekday alarm or date alarm (weekday/date) by setting the WADA bit. WADA = 0 for weekday alarm or WADA = 1 for date alarm.
3. Write the desired alarm settings in registers 07h to 09h. The three alarm enable bits, AE_M, AE_H and AE_WD, are used to select the corresponding register that has to be taken into account for match or not. See the following table.
4. Set CAIE bit to 1 to enable clock output when an alarm occurs. See also CLOCK OUTPUT SCHEME.
5. Set the AIE bit to 1 if you want to get a hardware interrupt on $\overline{\text{INT}}$ pin.

Alarm Interrupt:

Alarm enable bits			Alarm event
AE_WD	AE_H	AE_M	
0	0	0	When minutes, hours and weekday/date match (once per weekday/date)
0	0	1	When hours and weekday/date match (once per weekday/date)
0	1	0	When minutes and weekday/date match (once per hour per weekday/date)
0	1	1	When weekday/date match (once per weekday/date)
1	0	0	When hours and minutes match (once per day)
1	0	1	When hours match (once per day)
1	1	0	When minutes match (once per hour)
1	1	1	All disabled – Default value

AE_x bits (where x is WD, H or M)
 AE_x = 0: Alarm is enabled
 AE_x = 1: Alarm is disabled – Default value

4.12. EXTERNAL EVENT FUNCTION

The External Event Interrupt and the Time Stamp function are enabled by the control bits EIE, TSS and TSE. Depending of the EHL bit a high level (positive edge) or low level (negative edge) signal can be regarded as an event and furthermore a digital glitch filtering is applied to the EVI signal when selecting a sampling period in the ET field.


If enabled (EIE = 1, TSS = 0, TSE = 1 and EVF flag was cleared to 0 before) and an External Event on EVI pin is detected, the clock and calendar registers are captured and copied into the Time Stamp registers, the \overline{INT} is issued and the EVF flag is set to 1 to indicate that an external event has occurred.

When bit EIE is set to 1, the internal event interrupt signal (EI) can be used to enable the clock output on CLKOUT pin automatically, when bits CEIE, CLKIE and CLKOE are set to 1 and a frequency is selected in the FD field (see CLOCK OUTPUT SCHEME).

Caution: The EVF flag is also set by an event of the Backup Switchover function when bits TSS and TSE are set to 1.

4.12.1. EXTERNAL EVENT DIAGRAM

Diagram of the External Event function. Example with positive edge/level detection (EHL = 1):

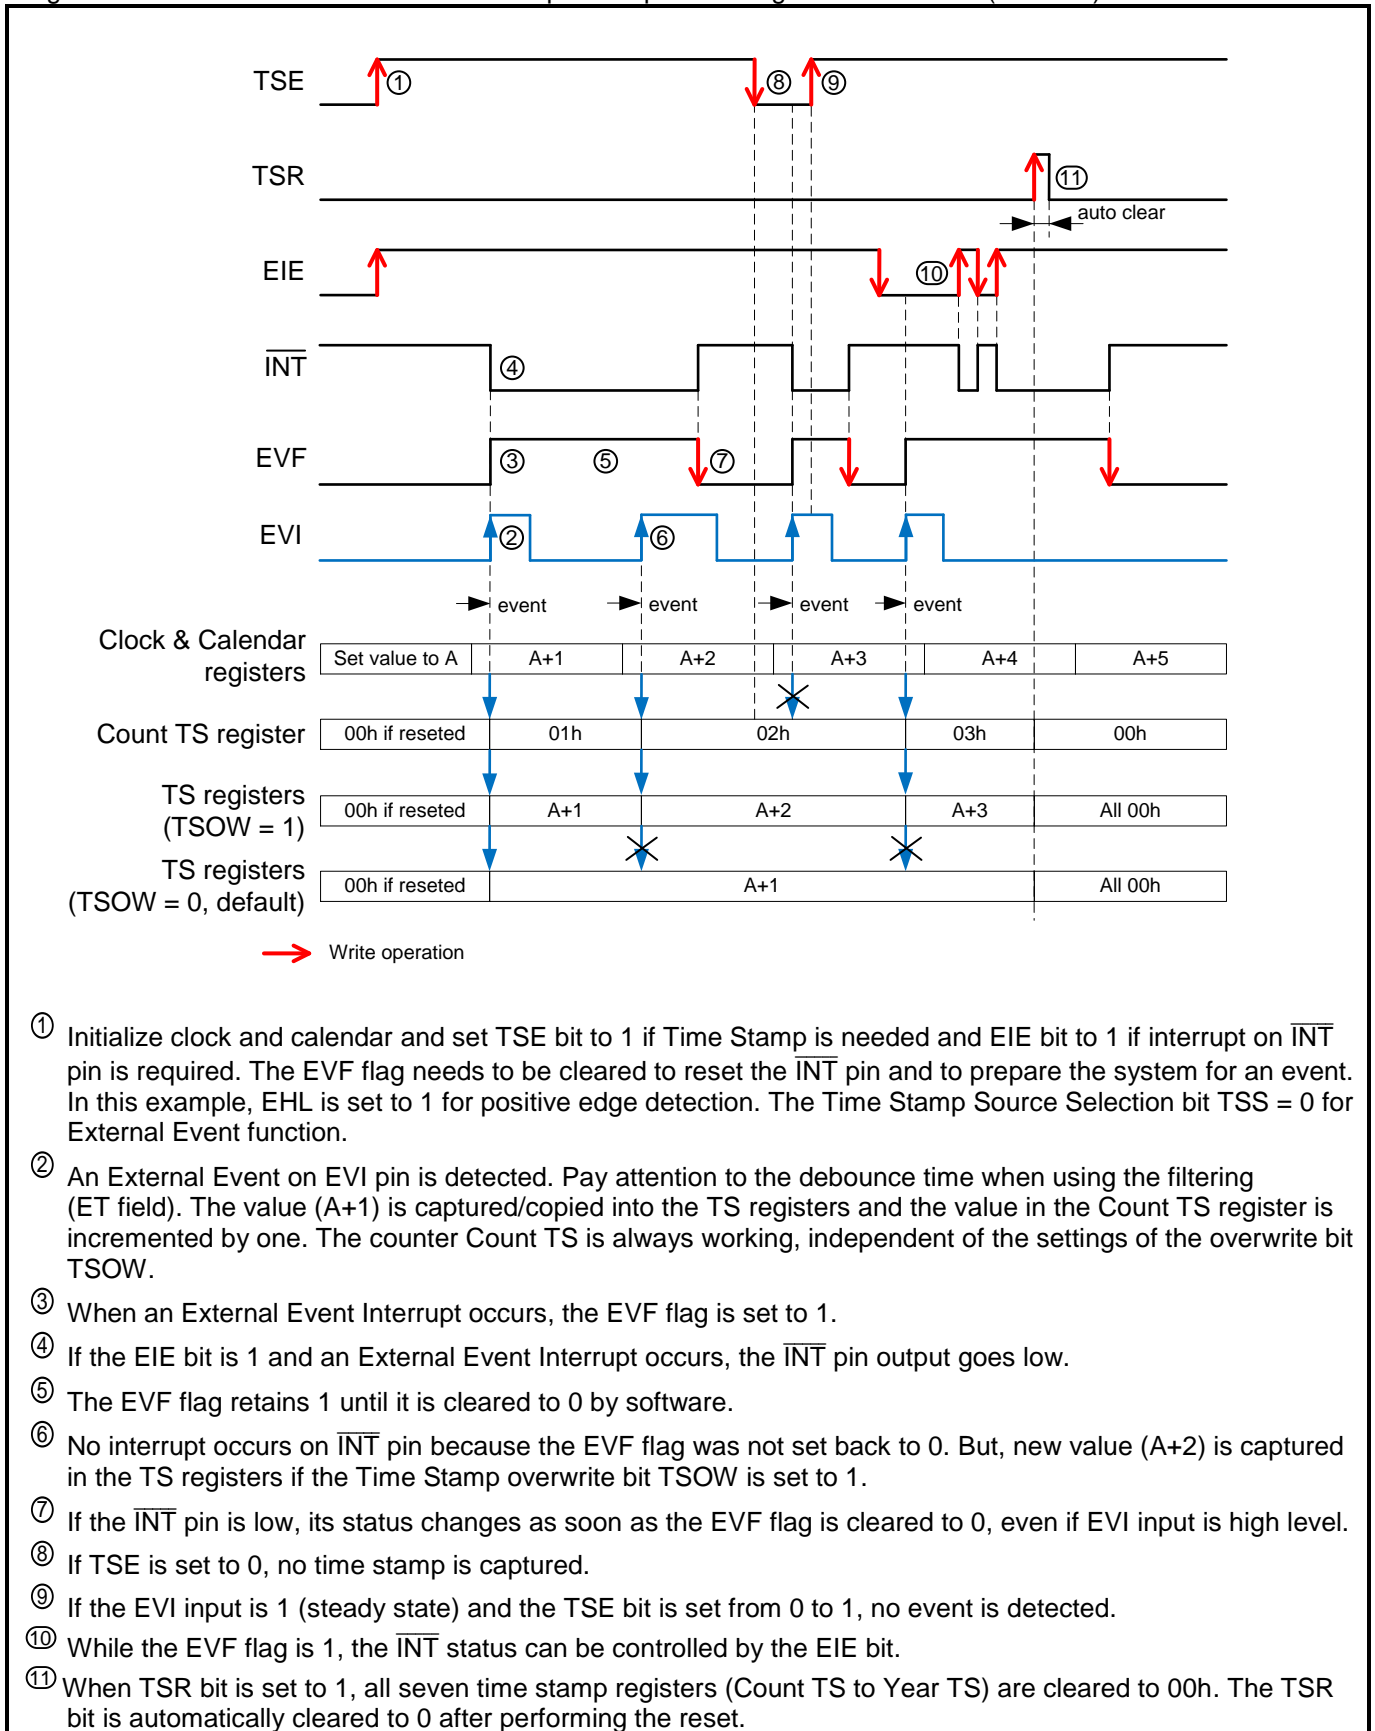

4.12.2. USE OF THE EXTERNAL EVENT FUNCTION

The following registers and bits are related to the External Event Interrupt, Time Stamp and Automatic Clock output function:


- Seconds Register (00h) (see CLOCK REGISTERS)
- Minutes Register (01h) (see CLOCK REGISTERS)
- Hours Register (02h) (see CLOCK REGISTERS)
- Date Register (04h) (see CALENDAR REGISTERS)
- Month Register (05h) (see CALENDAR REGISTERS)
- Year Register (06h) (see CALENDAR REGISTERS)
- Count TS Register (14h) (see TIME STAMP REGISTERS)
- Seconds TS (15h) (see TIME STAMP REGISTERS)
- Minutes TS (16h) (see TIME STAMP REGISTERS)
- Hours TS (17h) (see TIME STAMP REGISTERS)
- Date TS (18h) (see TIME STAMP REGISTERS)
- Month TS (19h) (see TIME STAMP REGISTERS)
- Year TS (1A) (see TIME STAMP REGISTERS)
- EVF flag (see CONFIGURATION REGISTERS, 0Eh – Status)
- TSE and EIE bits (see CONFIGURATION REGISTERS, 10h – Control 2)
- CEIE bit (see CONFIGURATION REGISTERS, 12h – Clock Interrupt Mask)
- EHL bit, ET field, TSR bit, TSOW bit and TSS bit (see EVENT CONTROL REGISTER)

Prior to entering any timer settings for the event interrupt, it is recommended to write a 0 to the EIE bit to prevent inadvertent interrupts on $\overline{\text{INT}}$ pin.


Procedure to use the External Event Interrupt, Time Stamp and Automatic Clock output function:

1. Initialize bits TSE, EIE and flag EVF to 0.
2. Set TSR bit to 1, to reset all Time Stamp registers to 00h. After reset the TSR bit is automatically cleared.
3. Set EHL bit to 1 or 0 to choose high or low level detection on pin EVI.
4. Set ET field to apply filtering to the EVI pin. See following two diagrams.
5. Set TSS bit to 0 to select External Event on EVI pin as Time Stamp source.
6. Set TSOW bit to 1 if the last occurred event has to be recorded and TS registers are overwritten.
Hint: The counter Count TS is always working, independent of the settings of the overwrite bit TSOW.
7. Set CEIE bit to 1 to enable clock output when external event occurs. See also CLOCK OUTPUT SCHEME.
8. Set TSE bit to 1 if you want to enable the Time Stamp function.
9. Set EIE bit to 1 if you want to get a hardware interrupt on $\overline{\text{INT}}$ pin.

Example with no filtering ($ET = 00$), with positive edge detection ($EHL = 1$) and enabled interrupt ($EIE = 1$):

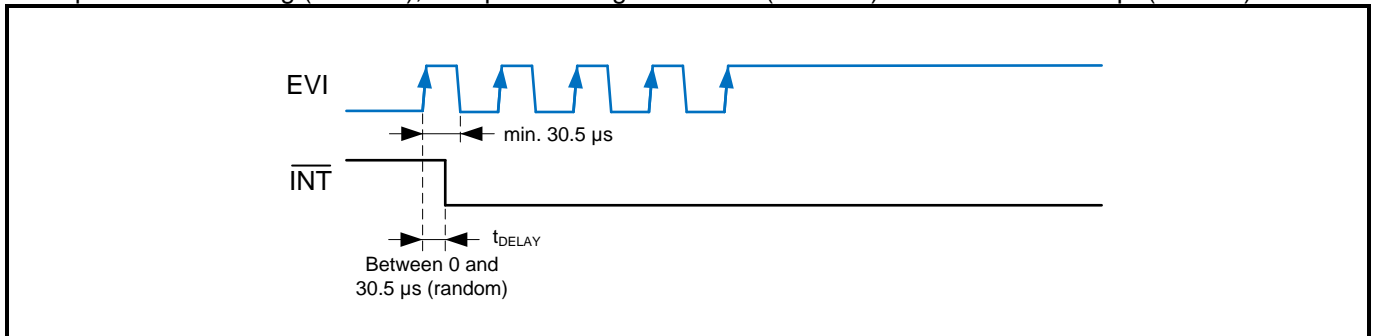

Example with digital debounce filtering ($ET = 01, 10$ or 11 ; sampling period $t_{SP} = 3.9$ ms, 15.6 ms or 125 ms), with positive edge/level detection ($EHL = 1$) and enabled interrupt ($EIE = 1$):

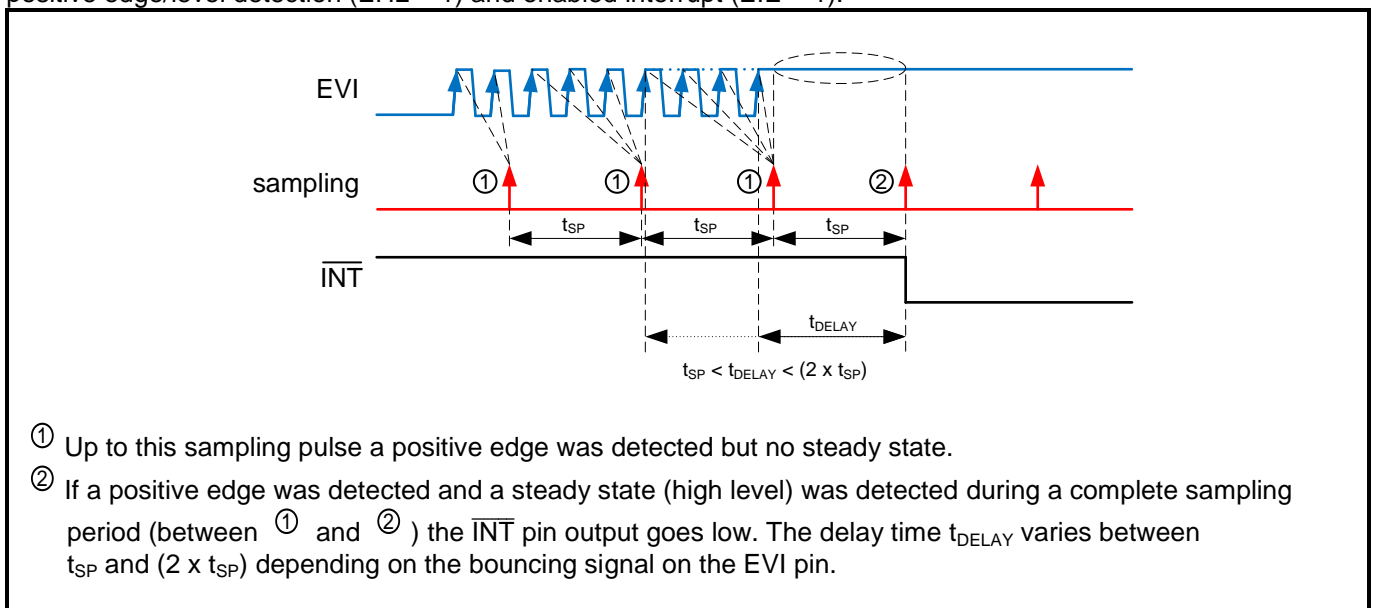

- ① Up to this sampling pulse a positive edge was detected but no steady state.
- ② If a positive edge was detected and a steady state (high level) was detected during a complete sampling period (between ① and ②) the \overline{INT} pin output goes low. The delay time t_{DELAY} varies between t_{SP} and $(2 \times t_{SP})$ depending on the bouncing signal on the EVI pin.

4.13. AUTOMATIC BACKUP SWITCHOVER INTERRUPT FUNCTION

The Automatic Backup Switchover Interrupt function generates an interrupt event when the BSM field (EEPROM 37h) is set to 01 (DSM) or 11 (LSM) and a switchover from VDD Power state to VBACKUP Power state occurs. When an interrupt event is generated, the $\overline{\text{INT}}$ pin goes to the low level and the BSF flag is set to 1 to indicate that an event has occurred. The output on the $\overline{\text{INT}}$ pin is only effective if the BSIE bit (EEPROM 37h) is set to 1.


When bit EIE is set to 1 and when the bits TSS and TSE are set to 1, the internal event interrupt signal (EI) created by the Automatic Backup Switchover function can be used to enable the clock output on CLKOUT pin automatically, when bits CEIE, CLKIE and CLKOE are set to 1 and a frequency is selected in the FD field. When again in VDD Power state, CLKOUT pin outputs the frequency (see CLOCK OUTPUT SCHEME).

Hint: A debounce logic provides a 122 μs – 183 μs debounce time t_{DEB} , which will filter V_{DD} oscillation when the backup switchover will switch back from V_{BACKUP} to V_{DD} (see AUTOMATIC BACKUP SWITCHOVER FUNCTION).

Hint: The FEDE bit (EEPROM 37h) should always be set to 1, so that Fast Edge Detection ($\geq 7 \text{ V/ms}$) is always enabled (see EEPROM BACKUP REGISTER). – Default value on delivery

4.13.1. AUTOMATIC BACKUP SWITCHOVER DIAGRAM

Diagram of the Automatic Backup Switchover Interrupt function:

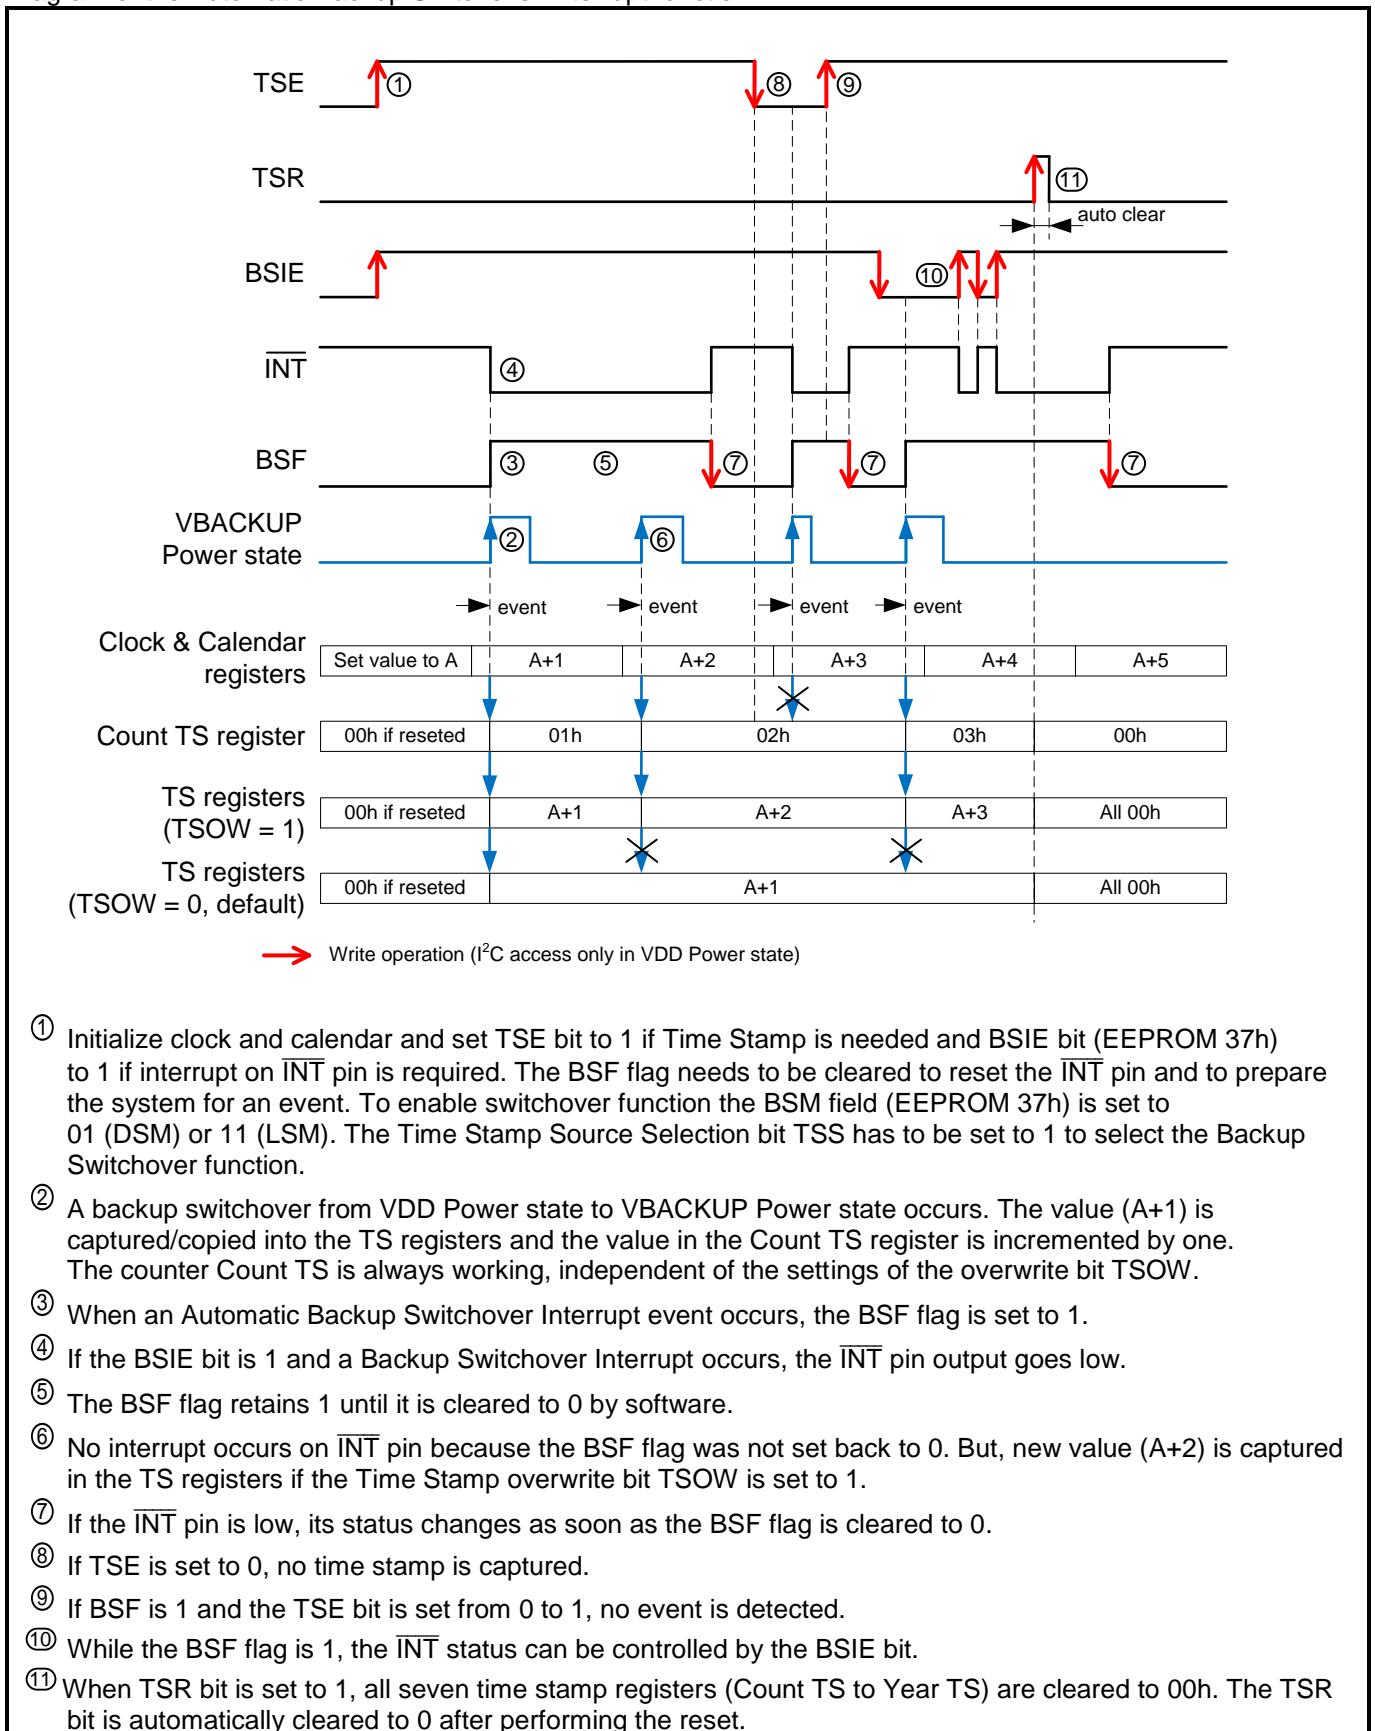

4.13.2. USE OF THE AUTOMATIC BACKUP SWITCHOVER INTERRUPT

The following registers and bits are related to the Automatic Backup Switchover Interrupt, Time Stamp and Automatic Clock output function:

- Seconds Register (00h) (see CLOCK REGISTERS)
- Minutes Register (01h) (see CLOCK REGISTERS)
- Hours Register (02h) (see CLOCK REGISTERS)
- Date Register (04h) (see CALENDAR REGISTERS)
- Month Register (05h) (see CALENDAR REGISTERS)
- Year Register (06h) (see CALENDAR REGISTERS)
- Count TS (14h) (see TIME STAMP REGISTERS)
- Seconds TS (15h) (see TIME STAMP REGISTERS)
- Minutes TS (16h) (see TIME STAMP REGISTERS)
- Hours TS (17h) (see TIME STAMP REGISTERS)
- Date TS (18h) (see TIME STAMP REGISTERS)
- Month TS (19h) (see TIME STAMP REGISTERS)
- Year TS (1A) (see TIME STAMP REGISTERS)
- BSF flag (see CONFIGURATION REGISTERS, 0Eh – Status)
- CEIE bit (see CONFIGURATION REGISTERS, 12h – Clock Interrupt Mask)
- TSR bit, TSOW bit and TSS bit (see EVENT CONTROL REGISTER)
- BSIE bit, FEDE bit and BSM field (see EEPROM BACKUP REGISTER)

Prior to entering any other settings, it is recommended to write a 0 to the BSIE bit to prevent inadvertent interrupts on $\overline{\text{INT}}$ pin.

Procedure to use the Automatic Backup Switchover Interrupt, Time Stamp and Automatic Clock output function:

1. Initialize bits TSE, BSIE and BSF to 0.
2. Set TSR bit to 1, to reset all Time Stamp registers to 00h. After reset, the TSR bit is automatically cleared.
3. Set TSS bit to 1 to select Backup Switchover as Time Stamp source.
4. Set TSOW bit to 1 if the last occurred event has to be recorded and TS registers are overwritten.
Hint: The counter Count TS is always working, independent of the settings of the overwrite bit TSOW.
5. Set TSE bit to 1 if you want to enable the Time Stamp function.
6. Set CEIE bit to 1 to enable clock output when a backup switchover occurs.
Caution: This function is only working with the Automatic Backup Switchover function when the bits TSS and TSE are set to 1. See also CLOCK OUTPUT SCHEME.
7. The FEDE bit (EEPROM 37h) should always be set to 1, so that Fast Edge Detection (≥ 7 V/ms) is always enabled.
8. Set the BSIE bit to 1 (EEPROM 37h) if you want to get a hardware interrupt on $\overline{\text{INT}}$ pin.
9. Choose the switchover mode (DSM or LSM) and write the corresponding value in the BSM field.


See also EEPROM READ/WRITE CONDITIONS.

4.14. POWER ON RESET INTERRUPT FUNCTION

The Power On Reset Interrupt function is enabled by the PORIE bit (EEPROM 35h). The PORIE bit has to be set beforehand in the EEPROM not in the RAM (see EEPROM READ/WRITE). When voltage drop below V_{POR} is detected ($V_{DD} < V_{POR}$) the PORF flag is set to 1 to indicate that a Power On Reset has occurred and when the PORIE bit is 1 the \overline{INT} pin goes to low level. A PORF value of 1 indicates also that the time information is corrupted. The value 1 is retained until a 0 is written by the user.

4.14.1. POWER ON RESET DIAGRAM

Diagram of the Power On Reset Interrupt function:

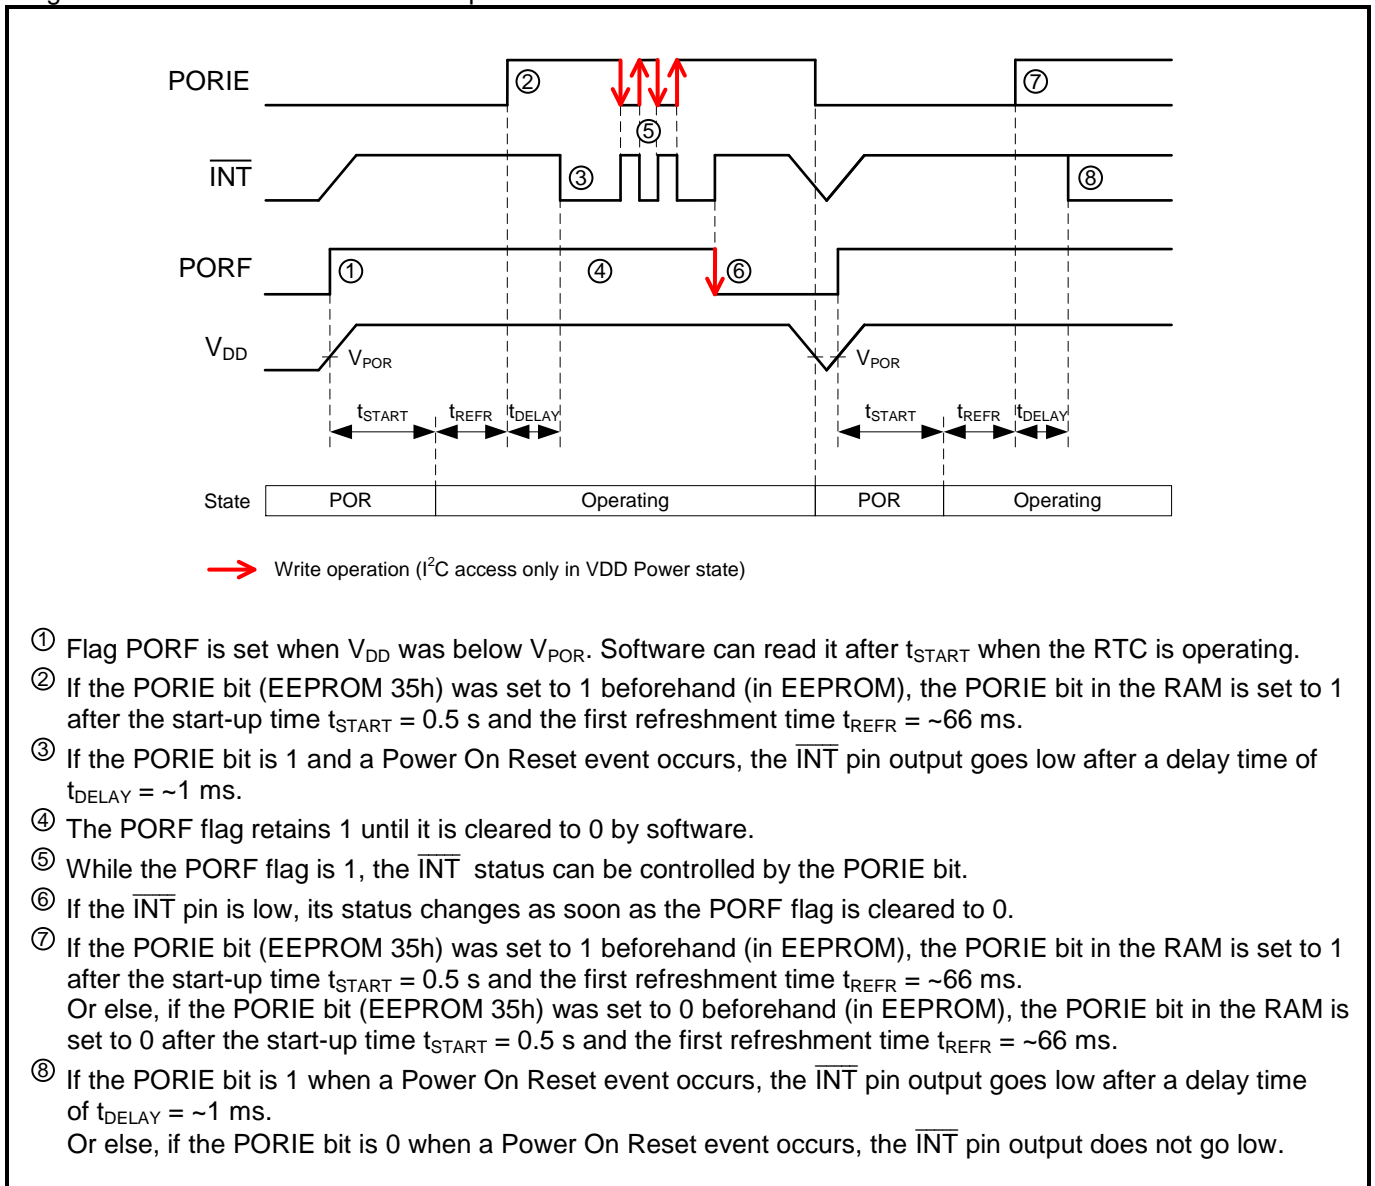

4.14.2. USE OF THE POWER ON RESET INTERRUPT

The following registers and bits are related to the Power On Reset Interrupt function (including EEPROM handling):

- PORF flag and EEbusy bit (see CONFIGURATION REGISTERS, 0Eh – Status)
- EERD bit (see CONFIGURATION REGISTERS, 0Fh – Control 1)
- EEaddr register (see EEPROM MEMORY CONTROL REGISTERS, 25h –EEPROM Address)
- EEdata register (see EEPROM MEMORY CONTROL REGISTERS, 26h –EEPROM Data)
- EEcmd register (see EEPROM MEMORY CONTROL REGISTERS, 27h –EEPROM Commands)
- PORIE bit (see EEPROM CLKOUT REGISTER, 35h – EEPROM Clkout)

The PORIE bit has to be set beforehand in the EEPROM not in the RAM (see EEPROM READ/WRITE).

Procedure to use the Power On Reset Interrupt function:

1. In the EEPROM, set the PORIE bit to 1 if you want to get a hardware interrupt on $\overline{\text{INT}}$ pin at the next Power On Reset event. Procedure according to EEPROM READ/WRITE.
2. The first interrupt will occur after the next POR event.

4.15. TIME STAMP FUNCTION

The Time Stamp function is enabled by the control bit TSE. Sources are the External Event function (TSS = 0) or the Automatic Backup Switchover function (TSS = 1).

If a source is enabled and an event is detected, the Time Stamp (TS) registers are recorded. When the TSOW bit is set to 0 and the EVF flag was cleared to 0 before, only one (the first) event is recorded. When the TSOW bit is set to 1, the last event is recorded (EVF flag does not need to be cleared). The counter Count TS is always working, independent of the settings of the overwrite bit TSOW.

- When the TSR bit value is 1, the data of the time stamp in TS registers and Count TS are reset.
- Before writing settings for TS, it is recommended to write a 0 in the TSE bit and a 1 to EVR bit.
- When 1 is written to the RESET bit, the TS event can be retarded.


Procedures to use the Time Stamp function with the External Event Interrupt function or with the Automatic Backup Switchover function:

1. Write 0 in TSS and TSE bits. Select TSOW (0 or 1), clear EVF and BSF.
2. Write 1 in TSR bit then it is automatically cleared after performing the reset.
3. Write the desired external event or backup switchover settings (enabling function and interrupt on $\overline{\text{INT}}$ pin):
 - a. See EXTERNAL EVENT FUNCTION
 - b. See AUTOMATIC BACKUP SWITCHOVER INTERRUPT FUNCTION
4. Set the TSE bit to 1 to enable the Time Stamp function.

Hint: The $\overline{\text{INT}}$ signal is issued when EIE (RAM) or BSIE (EEPROM 37h) bit is set to 1. The EVF or BSF flag is set to 1 to indicate that a corresponding event has occurred.

Caution: Because the EVF flag is internally used for the identification of a First Event detection it is set by an event from the External Event function (TSS = 0, TSE = 1) or by an event of the Backup Switchover function (TSS = 1, TSE = 1). See also following scheme.

Complete Time Stamp scheme:

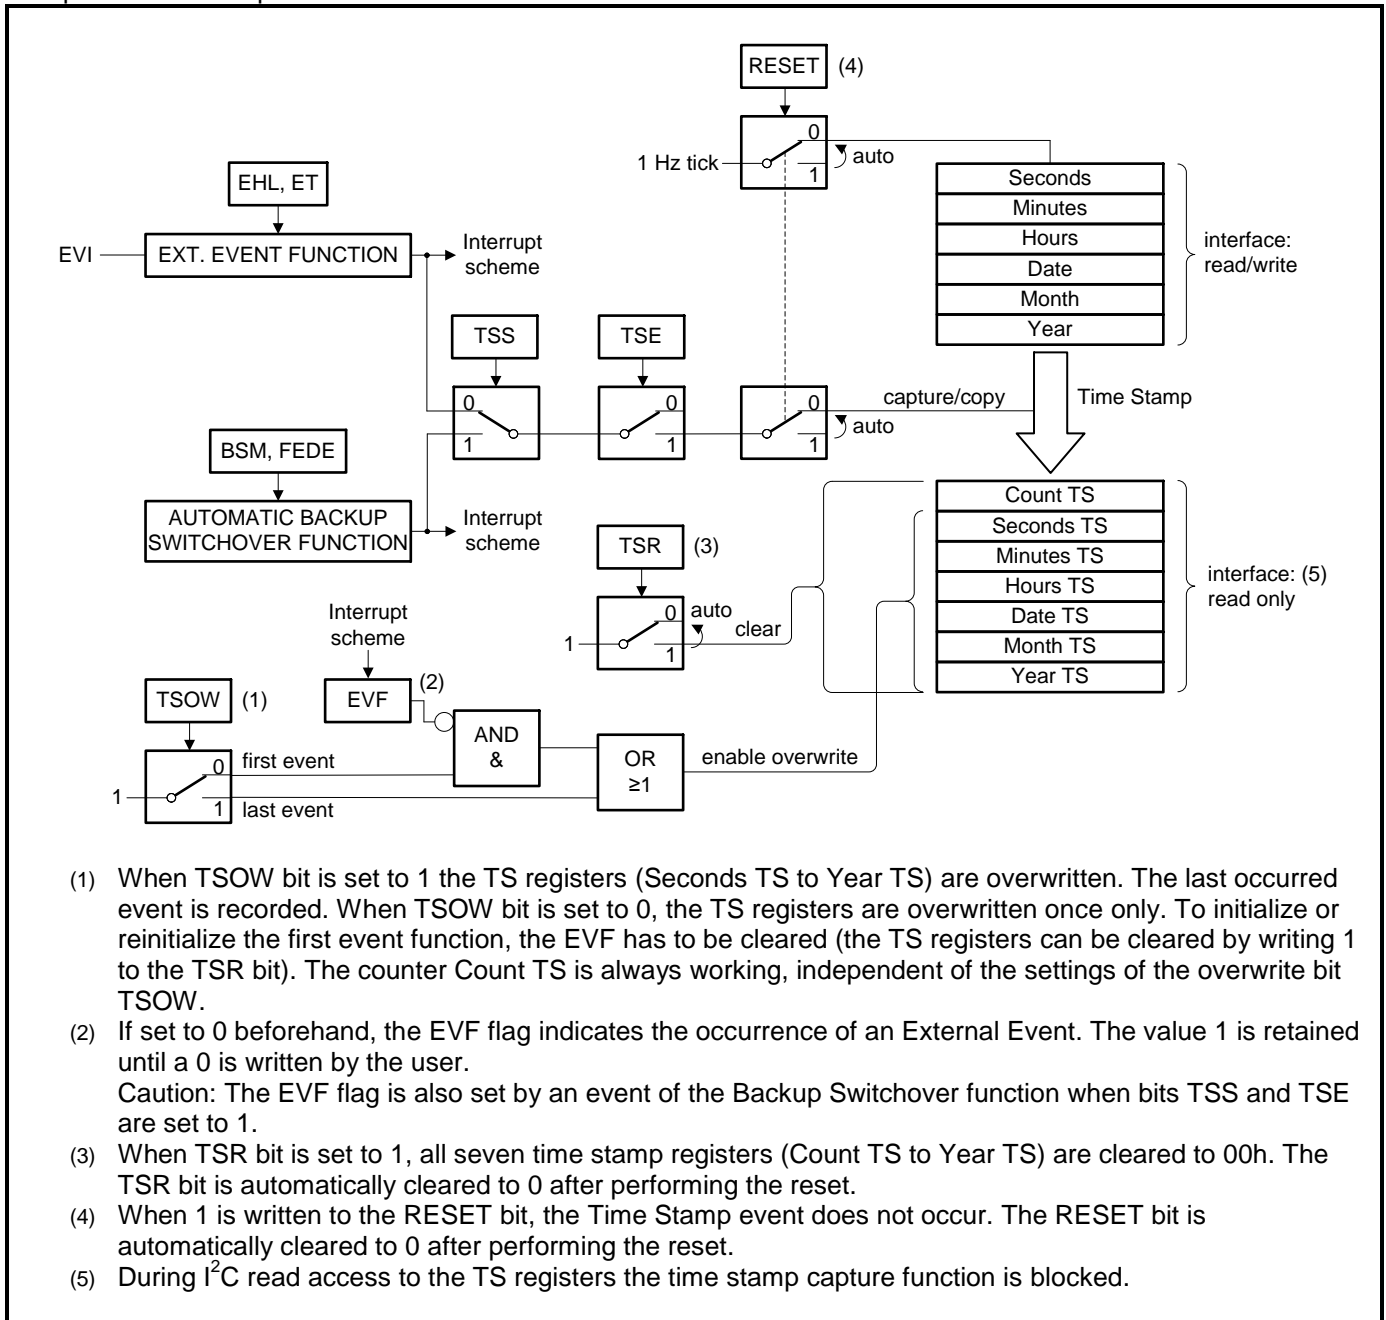

- (1) When TSOV bit is set to 1 the TS registers (Seconds TS to Year TS) are overwritten. The last occurred event is recorded. When TSOV bit is set to 0, the TS registers are overwritten once only. To initialize or reinitialize the first event function, the EVF has to be cleared (the TS registers can be cleared by writing 1 to the TSR bit). The counter Count TS is always working, independent of the settings of the overwrite bit TSOV.
- (2) If set to 0 beforehand, the EVF flag indicates the occurrence of an External Event. The value 1 is retained until a 0 is written by the user.
Caution: The EVF flag is also set by an event of the Backup Switchover function when bits TSS and TSE are set to 1.
- (3) When TSR bit is set to 1, all seven time stamp registers (Count TS to Year TS) are cleared to 00h. The TSR bit is automatically cleared to 0 after performing the reset.
- (4) When 1 is written to the RESET bit, the Time Stamp event does not occur. The RESET bit is automatically cleared to 0 after performing the reset.
- (5) During I²C read access to the TS registers the time stamp capture function is blocked.

4.16. FREQUENCY OFFSET CORRECTION

An aging adjustment or accuracy tuning can be done with the EEOffset value. The correction is purely digitally and has only the effect of shifting the time vs. temperature curve vertically up or down. It has no effect on the time vs. temperature characteristics of the final frequency. The EEOffset value contains a two's complement number with a range of +255 to -256 adjustment steps. The minimal correction step (one LSB) is $\pm 1 / (32768 * 32) = \pm 0.9537$ ppm. The compensation period is 32 seconds. The maximum correction range is from +243.2 ppm to -244.1 ppm. Note that the signed offset value EEOffset corresponds to the correction value of the measured frequency (32.768 kHz). The user has access to this field (see EEPROM OFFSET REGISTER).

4.16.1. EEOFFSET VALUE DETERMINATION

The EEOffset value is determined by the following process:

1. Select the 32.768 kHz frequency on the CLKOUT pin.
(If another frequency than 32.768 kHz is selected, the EEOffset value has to be set to 0 so that the uncorrected frequency can be measured, and the following calculations have to be adapted.)
2. Measure the frequency F_{meas} at CLKOUT pin in Hz.
3. Compute the offset value required in ppm: $POffset = ((F_{meas} - 32768) / 32768 * 1'000'000)$
4. Compute the offset value in steps: $Offset = POffset / (1 / (32768 * 32))$ in ppm) = $POffset / (0.9537 \text{ ppm})$
5. If $Offset > 256$, the frequency is too high to be corrected.
6. Else if $1 \leq Offset \leq 256$ (correction is $-1 \geq OffsetCorr. \geq -256$), \rightarrow set $EEOffset = 512 - Offset$
7. Else if $-255 \leq Offset \leq 0$ (correction is $+255 \leq OffsetCorr. \leq 0$), \rightarrow set $EEOffset = - Offset$
8. Else the frequency is too low to be corrected.

Examples:

- If 32768.48 Hz is measured when the 32.768 kHz clock is selected, the offset is +0.48 Hz, which is $+0.48 \text{ Hz} / 32768 \text{ Hz} * 1'000'000 = +14.648$ ppm. The Offset value in steps is then calculated as follows: $+14.648 \text{ ppm} / 0.9537 \text{ ppm} = +15.36$, the rounded integral part is 15 (the offset correction is -15 steps). The unsigned EEOffset value is then: $512 - 15 = +497$. In binary, $EEOffset = 111110001$.
- If 32767.52 Hz is measured when the 32.768 kHz clock is selected, the offset is -0.48 Hz, which is $-0.48 \text{ Hz} / 32768 \text{ Hz} * 1'000'000 = -14.648$ ppm. The Offset value in steps is then calculated as follows: $-14.648 \text{ ppm} / 0.9537 \text{ ppm} = -15.36$, the rounded integral part is -15 (the offset correction is +15 steps). The EEOffset value is then: $-(-15) = +15$. In binary, $EEOffset = 000001111$.

4.16.2. VERIFICATION OF THE CORRECTED TIME ACCURACY

The offset correction can be verified by the following process:

1. Enter the calculated EEOffset value (see EEOFFSET VALUE DETERMINATION).
2. Select the 1 Hz frequency on the CLKOUT pin (if another frequency is selected the following calculations have to be adapted).
3. Measure every period during one compensation period of 32 seconds at CLKOUT pin.
4. Calculate the average frequency F_{meas_aver} in Hz.
5. Compute the new achieved offset value in ppm: $POffset = ((F_{meas_aver} - 1) / 1 * 1'000'000)$


4.17. UNIX TIME COUNTER

The UNIX Time counter is a 32-bit counter, unsigned integer, which rolls over to 00000000h when reaching the value FFFFFFFFh. The 4 bytes are fully readable and writable. The counter source clock is the digitally tuned 1 Hz clock frequency of the prescaler.

After writing the required time value into the UNIX Time registers, the write access can be synchronized by the RESET bit function. When 1 is written to the RESET bit in control 2 register, the associated I²C stop condition will synchronize the 1 Hz counter clock to the desired accurate time. The RESET bit is then automatically cleared. The first 1 Hz period after synchronization will be 0 to 244 μs shorter than 1 second. The 32-bit counter value itself is not changed at the moment when 1 is written to the RESET bit.

When reading the counter, the current value is returned. Since it is not possible to block the counter during read, it is recommended to read the four registers (UNIX Time 0 to UNIX Time 3) twice and to check for consistent results.

Write to UNIX Time counter and synchronization by using RESET bit:

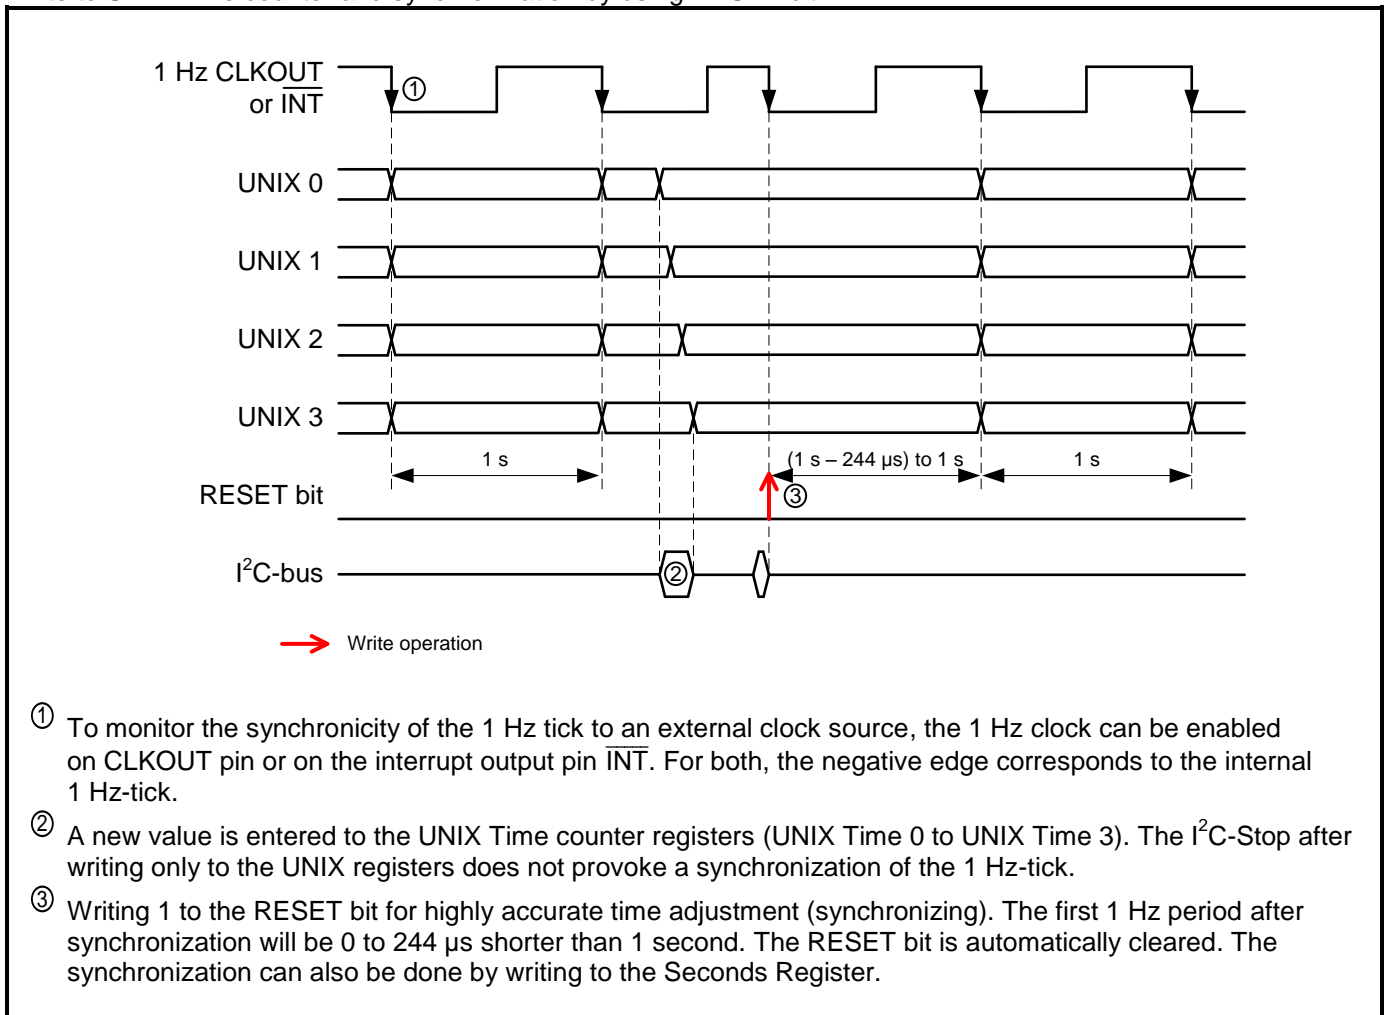


4.18. RESET BIT FUNCTION

The RESET bit is used for a software-based accurate and safe starting of the time circuits.

When 1 is written to the RESET bit, the clock prescaler for 4096 Hz to 1Hz is reset and an eventual present memorized 1 Hz update is also reset. This bit is then automatically cleared. Because the upper two stages of the prescaler are not reset and the I²C interface is asynchronous, the next 1 Hz clock will be between (1 second – 244 μ s) and 1 second. Resetting the prescaler will have an influence on the length of current clock period on all subsequent peripherals (clock and calendar, CLKOUT clock, timer clock, update timer clock, UNIX clock, EVI input filter).

The RESET bit function will not affect the CLKOUT of 32.768 kHz and 8192 Hz (see also CLKOUT FREQUENCY SELECTION).

RESET bit functional diagram:

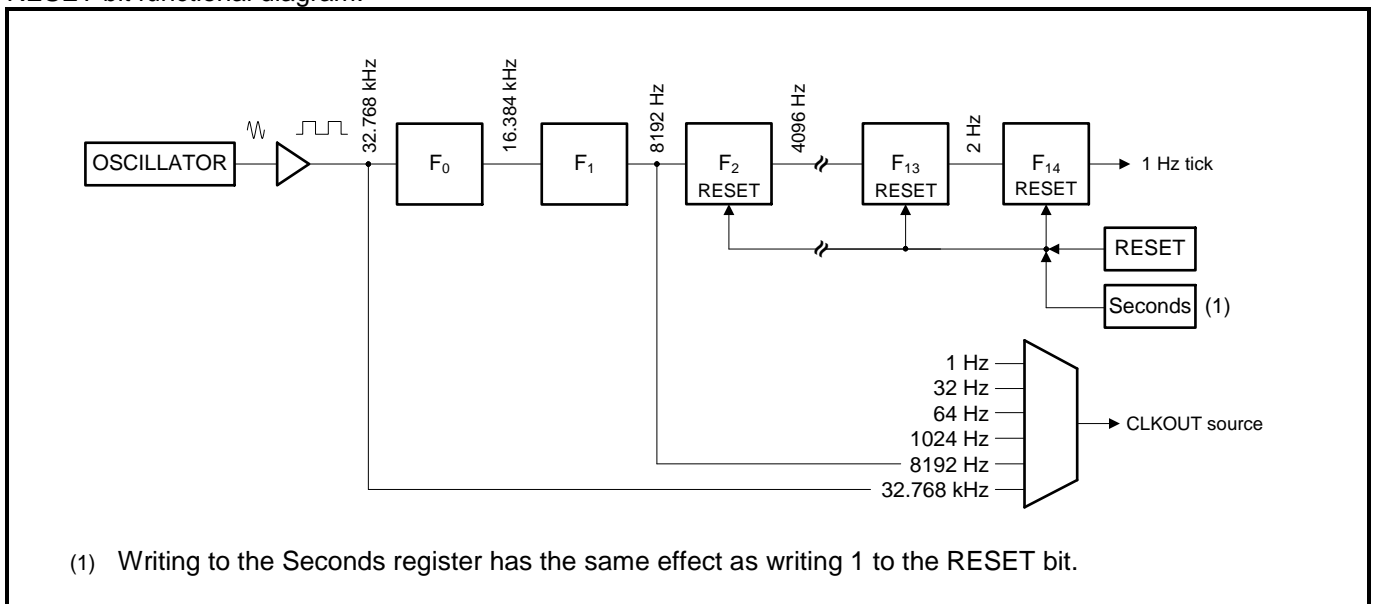

The clock and calendar can be set (in < 950 ms) and then synchronized by writing 1 to the RESET bit.

Setting the clock and calendar values using the RESET bit function:

1. Write the desired clock and calendar values to the registers (seconds, minutes, hours, weekday, date, month and year).
2. Write 1 to the RESET bit for a synchronized start of the time circuits (1 Hz tick). The RESET bit is automatically cleared.

4.19. USER PROGRAMMABLE PASSWORD

After a Power up and the first refreshment of ~66ms, the PW0 to PW3 registers are reset to 00h and the EEPWE (EEPROM 30h) and EEPW 0 to EEPW 3 values (EEPROM 31h to 34h) are copied from the EEPROM.

The first four Password registers (PW0 to PW3), in case of the use of the function (enabled by writing 255 into the EEPROM Password Enable register EEPWE), are used to write the 32-Bit Password necessary to be able to write in all writable registers (time and configuration registers). This 32-Bit Password is compared to the 32 bits stored in EEPROM Password registers EEPW 0 to EEPW 3 (see PASSWORD REGISTERS, EEPROM PASSWORD ENABLE REGISTER and EEPROM PASSWORD REGISTERS).

Caution: The number of possible passwords is $2^{32} \approx 4.3 * 10^9 = 4.3$ billion.

4.19.1. ENABLING/DISABLING WRITE PROTECTION

If the write protection function is enabled by writing 255 in register EEPWE (EEPROM 30h), it remains possible to read all the registers except the EEPROM registers. If the function is not enabled, read and write are possible for all corresponding registers.

If the write protection function is enabled, it is necessary to first write the 32-Bit Password before any attempt to write in the RAM registers, and to read and write in the EEPROM registers.

Once the user is finished with the write access and subsequently the write protection is enabled again (by writing 255 in EEPROM register EEPWE), it is necessary to write an incorrect password ($PW \neq EEPW$) into the Password registers PW0 to PW3 in order to write-protect the registers. See complete program sequences below and FLOWCHART.

Enable write protection:

1. Registers are Not write-protected ($EEPWE \neq 255$)
2. Reference password is stored here (EEPW 0 to EEPW 3)
3. Disable automatic refresh ($EERD = 1$)
4. Enable password function ($EEPWE = 255$) (RAM)
5. Enter the correct password PW ($PW = EEPW$) to unlock write protection (PW0 to PW3)
6. Update EEPROM (all Configuration RAM \rightarrow EEPROM) with $EEcmd = 00h$ followed by 11h
7. Enable automatic refresh ($EERD = 0$)
8. Enter an incorrect password PW ($PW \neq EEPW$) to (PW0 to PW3) to lock the device
9. Registers are Write-protected by password ($EEPWE = 255$)

Disable write protection:

1. Registers are write protected by password ($EEPWE = 255$)
2. Reference password is stored here (EEPW 0 to EEPW 3)
3. Enter the correct password PW ($PW = EEPW$) to unlock write protection (PW0 to PW3)
4. Disable automatic refresh ($EERD = 1$)
5. Disable password function ($EEPWE \neq 255$) (RAM)
6. Update EEPROM (all Configuration RAM \rightarrow EEPROM) with $EEcmd = 00h$ followed by 11h
7. Enable automatic refresh ($EERD = 0$)
8. Registers are Not write-protected ($EEPWE \neq 255$)

4.19.2. CHANGING PASSWORD

To code a new password, the user has to first enter the current (correct) password into the Password registers (PW0 to PW3) if the registers are write protected, and writing a value not equal to all 1 (value \neq 255) in the EEPWE register (EEPROM 30h) to unlock write protection, and then write the new one in the registers EEPW 0 to EEPW 3 (EEPROM 31h to 34h) and writing all 1 (value = 255) in the EEPWE register to enable password function. See complete program sequences below and FLOWCHART.

Change password if password function is enabled (EEPWE = 255):

1. Registers are Write-protected by old password (EEPW 0 to EEPW 3)
2. Enter old password PW (PW = EEPW) to unlock write protection (PW0 to PW3)
3. Disable automatic refresh (EERD = 1)
4. Disable password function (EEPWE \neq 255)
5. Define a new password EEPW (EEPW 0 to EEPW 3) (RAM), and edit other configuration settings (RAM)
6. Enable the password function (EEPWE = 255) (RAM)
7. Enter correct password PW (PW = EEPW) to unlock write protection (PW0 to PW3)
8. Update EEPROM (all Configuration RAM \rightarrow EEPROM) with EEcmd = 00h followed by 11h
9. Enable automatic refresh (EERD = 0)
10. Enter an incorrect password PW (PW \neq EEPW) to (PW0 to PW3) to lock the device
11. Registers are Write-protected by new password (EEPW 0 to EEPW 3)


Change password if password function is disabled (EEPWE \neq 255):

1. Old password is stored here (EEPW 0 to EEPW 3)
2. Disable automatic refresh (EERD = 1)
3. Define a new password EEPW (EEPW 0 to EEPW 3) (RAM), and edit other configuration settings (RAM)
4. Update EEPROM (all Configuration RAM \rightarrow EEPROM) with EEcmd = 00h followed by 11h
5. Enable automatic refresh (EERD = 0)
6. New password is stored here (EEPW 0 to EEPW 3)

4.19.3. FLOWCHART

The following Flowchart describes the programming of the enabling and disabling of the register write protection by user password and the changing of the user password if write protection is enabled or disabled.

User programmable password for register write protection:

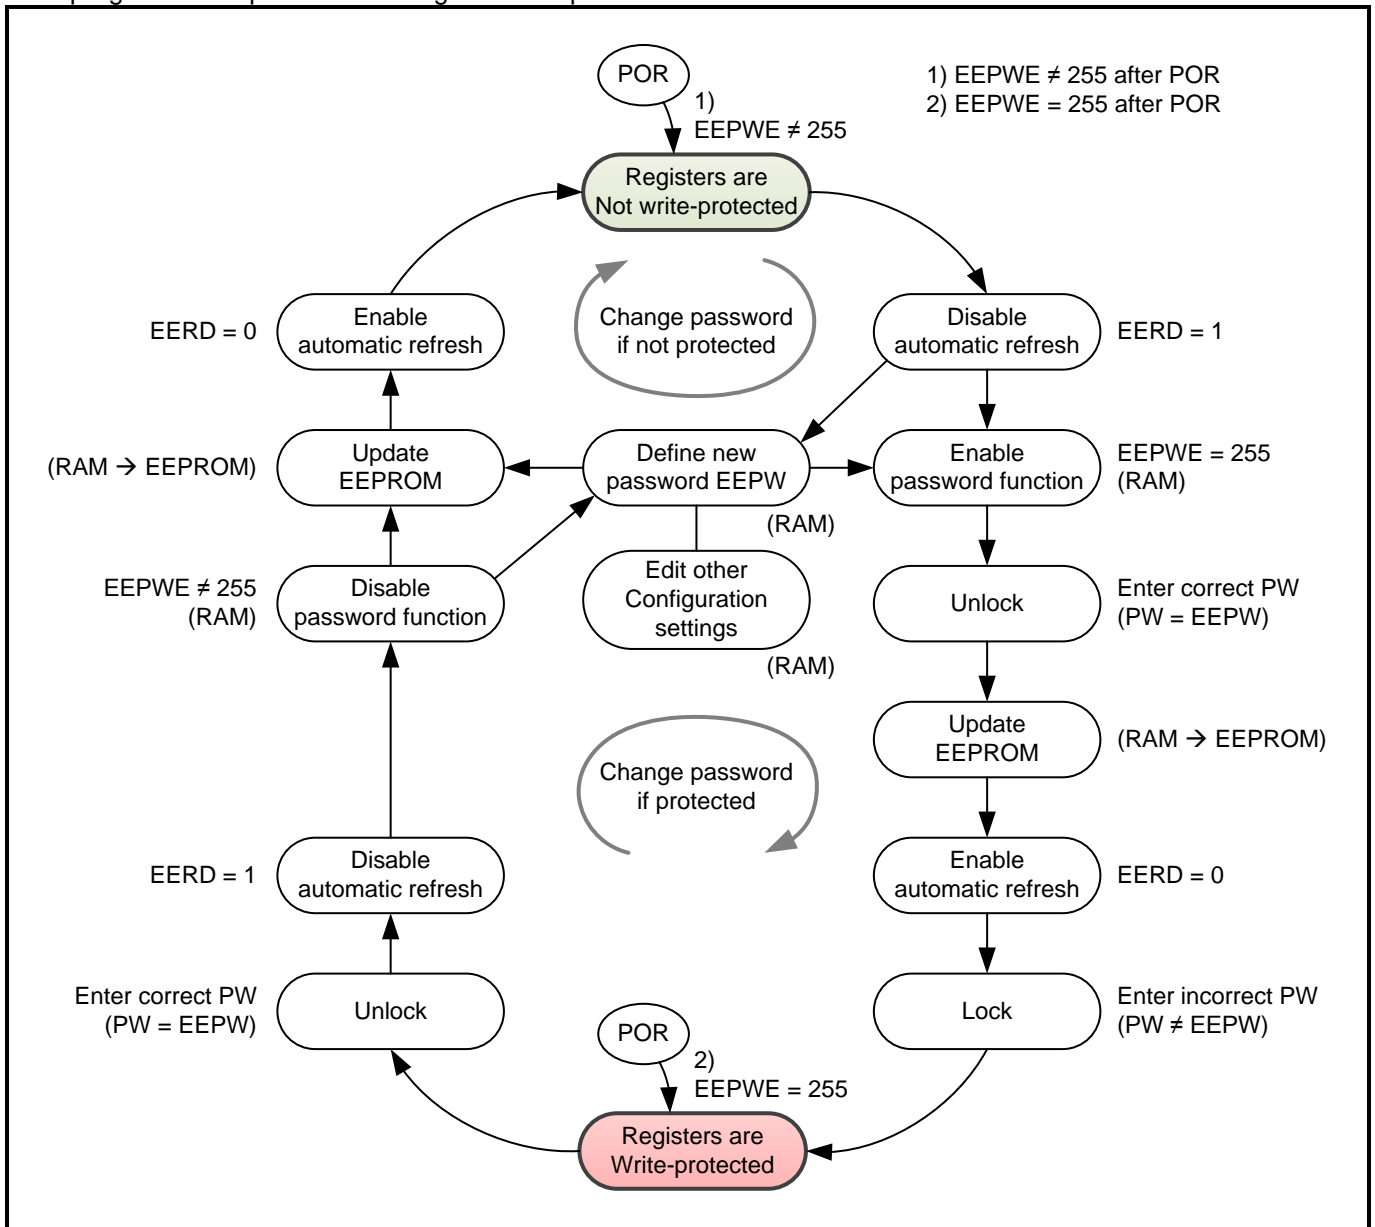


5. I²C INTERFACE

The I²C interface is for bidirectional, two-line communication between different ICs or modules. The RV-3028-C7 is accessed at addresses A4h/A5h, and supports Fast Mode (up to 400 kHz). The I²C interface consists of two lines: one bi-directional data line (SDA) and one clock line (SCL). Both lines are connected to a positive supply via pull-up resistors. Data transfer is initiated only when the interface is not busy.

5.1. BIT TRANSFER

One data bit is transferred during each clock pulse. The data on the SDA line remains stable during the HIGH period of the clock pulse, as changes in the data line at this time are interpreted as control signals. Data changes should be executed during the LOW period of the clock pulse (see Figure below).


Bit transfer:

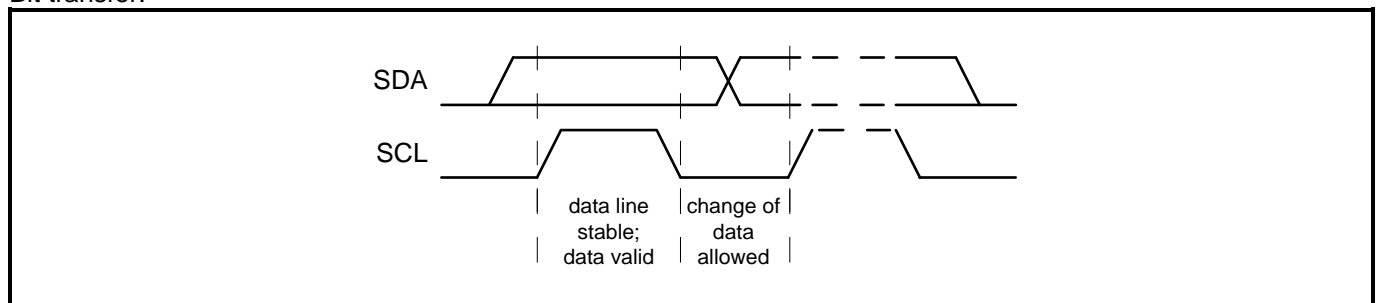

5.2. START AND STOP CONDITIONS

Both data and clock lines remain HIGH when the bus is not busy. A HIGH-to-LOW transition of the data line, while the clock is HIGH, is defined as the START condition (S). A LOW-to-HIGH transition of the data line, while the clock is HIGH, is defined as the STOP condition (P) (see Figure below).

Definition of START and STOP conditions:

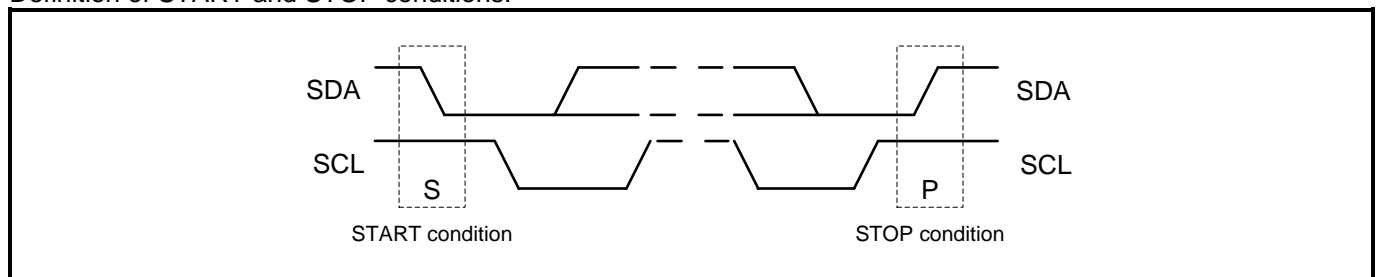

A START condition which occurs after a previous START but before a STOP is called a Repeated START condition, and functions exactly like a normal STOP followed by a normal START.

Caution:

When communicating with the RV-3028-C7 module, the series of operations from transmitting the START condition to transmitting the STOP condition should occur within **950 ms**.

If this series of operations requires **950 ms or longer**, the I²C bus interface will be automatically cleared and set to standby mode by the bus timeout function of the RV-3028-C7 module. Note with caution that both write and read operations are invalid for communications that occur during or after this auto clearing operation (when the read operation is invalid, all data that is read has a value of FFh).

Restarting of communications begins with transfer of the START condition again.

5.3. DATA VALID

After a START condition, SDA is stable for the duration of the high period of SCL. The data on SDA may be changed during the low period of SCL. There is one clock pulse per bit of data. Each data transfer is initiated with a START condition and terminated with a STOP condition. The number of data bytes transferred between the START and STOP conditions is not limited (however, the transfer time must be no longer than 950 ms). The information is transmitted byte-wide and each receiver acknowledges with a ninth bit.


5.4. SYSTEM CONFIGURATION

Since multiple devices can be connected with the I²C-bus, all I²C-bus devices have a fixed and unique device number built-in to allow individual addressing of each device.

The device that controls the I²C-bus is the Master; the devices which are controlled by the Master are the Slaves. A device generating a message is a Transmitter; a device receiving a message is the Receiver. The RV-3028-C7 acts as a Slave-Receiver or Slave-Transmitter.

Before any data is transmitted on the I²C-bus, the device which should respond is addressed first. The addressing is always carried out with the first byte transmitted after the START procedure. The clock signal SCL is only an input signal, but the data signal SDA is a bidirectional line.

System configuration:

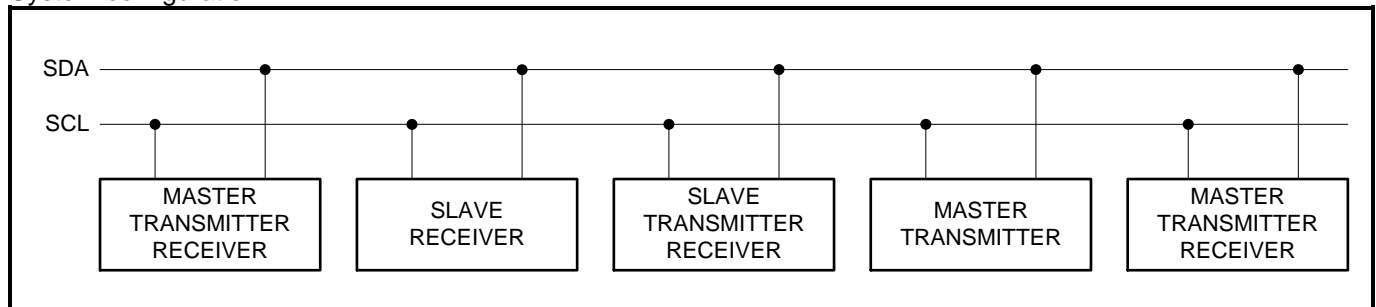


5.5. ACKNOWLEDGE

The number of data bytes transferred between the START and STOP conditions from transmitter to receiver is unlimited (however, the transfer time must be no longer than 950 ms). Each byte of eight bits is followed by an acknowledge cycle.

- A slave receiver, which is addressed, must generate an acknowledge cycle after the reception of each byte.
- Also a master receiver must generate an acknowledge cycle after the reception of each byte that has been clocked out of the slave transmitter.
- The device that acknowledges must pull-down the SDA line during the acknowledge clock pulse, so that the SDA line is stable LOW during the HIGH period of the acknowledge-related clock pulse (set-up and hold times must be taken into consideration).
- A master receiver must signal an end of data to the transmitter by not generating an acknowledge cycle on the last byte that has been clocked out of the slave. In this event the transmitter must leave the data line HIGH to enable the master to generate a STOP condition.

Data transfer and acknowledge on the I²C-bus:

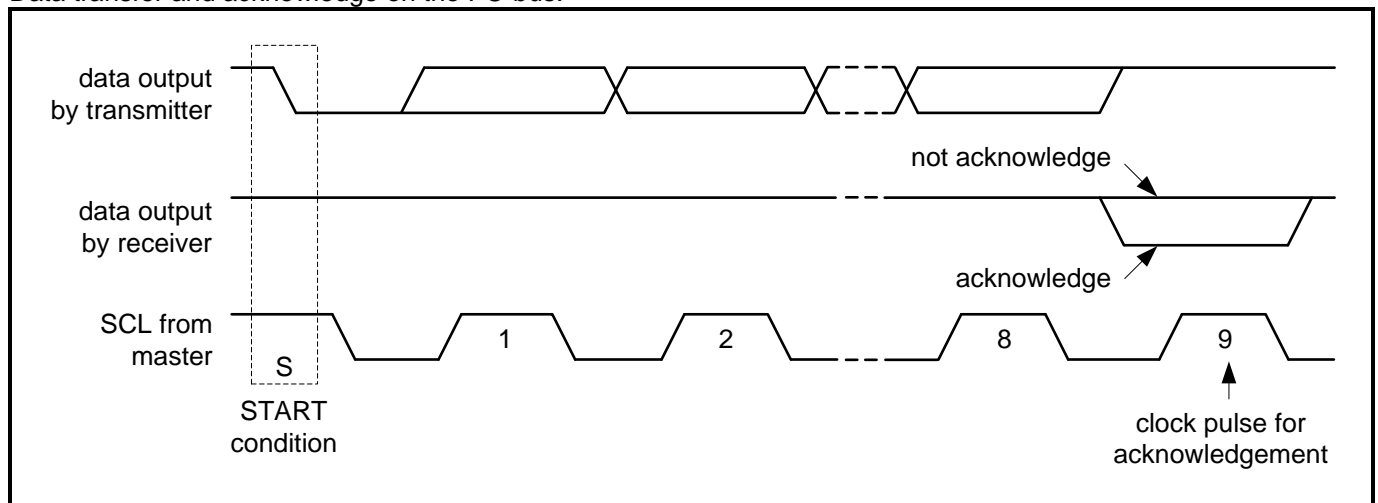

5.6. SLAVE ADDRESS

On the I²C-bus the 7-bit slave address 1010010b is reserved for the RV-3028-C7. The entire I²C-bus slave address byte is shown in the following table.

Slave address							R/ \bar{W}	Transfer data
Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
1	0	1	0	0	1	0	1 (R)	A5h (read)
							0 (\bar{W})	A4h (write)


After a START condition, the I²C slave address has to be sent to the RV-3028-C7 device. The R/ \bar{W} bit defines the direction of the following single or multiple byte data transfer. The 7-bit address is transmitted MSB first. If this address is 1010010b, the RV-3028-C7 is selected, the eighth bit indicates a read (R/ \bar{W} = 1) or a write (R/ \bar{W} = 0) operation (results in A5h or A4h) and the RV-3028-C7 supplies the ACK. The RV-3028-C7 ignores all other address values and does not respond with an ACK.

In the write operation, a data transfer is terminated by sending either the STOP condition or the START condition of the next data transfer.

5.7. WRITE OPERATION

Master transmits to Slave-Receiver at specified address. The Register Address is an 8-bit value that defines which register is to be accessed next. After writing one byte, the Register Address is automatically incremented by 1.


Master writes to slave RV-3028-C7 at specific address:

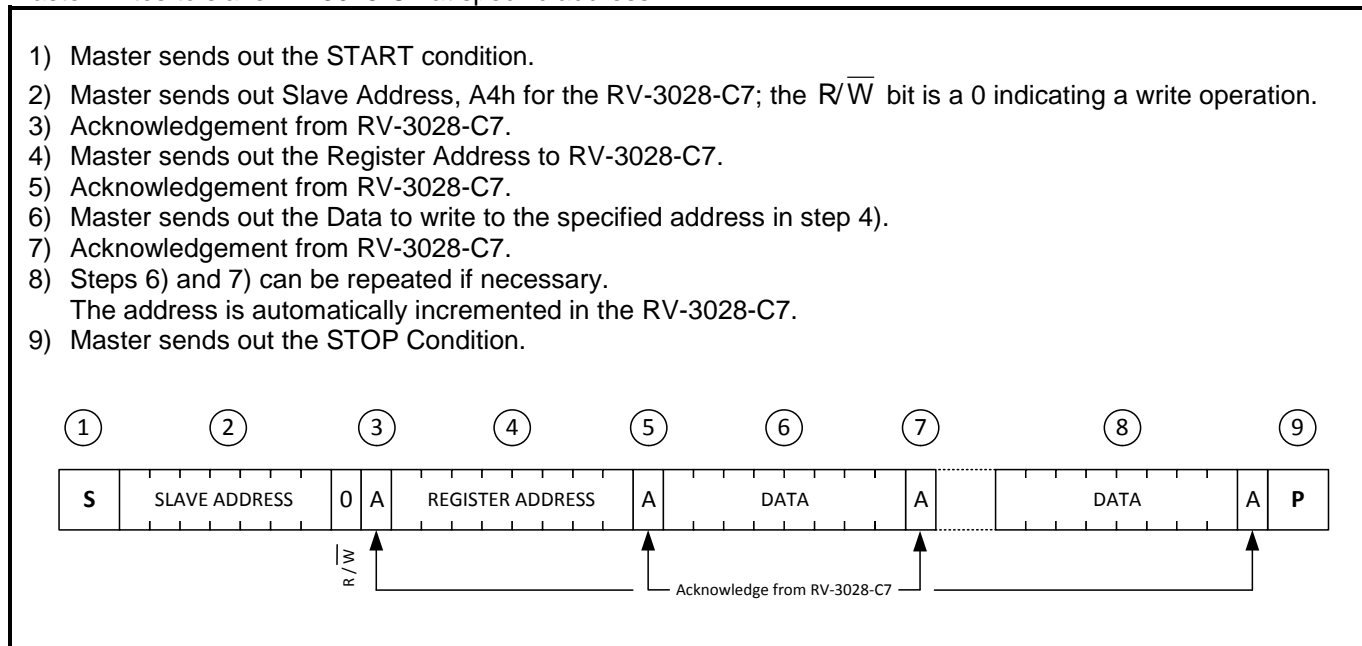

5.8. READ OPERATION AT SPECIFIC ADDRESS

Master reads data from slave RV-3028-C7 at specific address:


- 1) Master sends out the START condition.
- 2) Master sends out Slave Address, A4h for the RV-3028-C7; the $\overline{R/W}$ bit is a 0 indicating a write operation.
- 3) Acknowledgement from RV-3028-C7.
- 4) Master sends out the Register Address to RV-3028-C7.
- 5) Acknowledgement from RV-3028-C7.
- 6) Master sends out the Repeated START condition (or STOP condition followed by START condition)
- 7) Master sends out Slave Address, A5h for the RV-3028-C7; the $\overline{R/W}$ bit is a 1 indicating a read operation.
- 8) Acknowledgement from RV-3028-C7.
- At this point, the Master becomes a Receiver and the Slave becomes the Transmitter.
- 9) The Slave sends out the Data from the Register Address specified in step 4).
- 10) Acknowledgement from Master.
- 11) Steps 9) and 10) can be repeated if necessary.
- The address is automatically incremented in the RV-3028-C7.
- 12) The Master, addressed as Receiver, can stop data transmission by not generating an acknowledge on the last byte that has been sent from the Slave-Transmitter. In this event, the Slave-Transmitter must leave the data line HIGH to enable the Master to generate a STOP condition.
- 13) Master sends out the STOP condition.

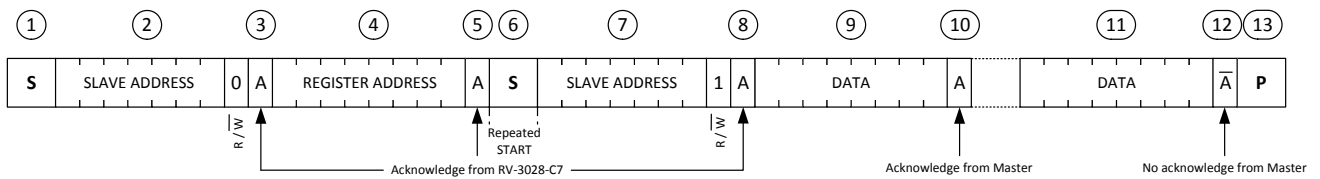

5.9. READ OPERATION

Master reads data from slave RV-3028-C7 immediately after first byte:

- 1) Master sends out the START condition.
- 2) Master sends out Slave Address, A5h for the RV-3028-C7; the $\overline{R/W}$ bit is a 1 indicating a read operation.
- 3) Acknowledgement from RV-3028-C7.
- At this point, the Master becomes a Receiver and the Slave becomes the Transmitter.
- 4) The RV-3028-C7 sends out the Data from the last accessed Register Address incremented by 1.
- 5) Acknowledgement from Master.
- 6) Steps 4) and 5) can be repeated if necessary.
- The address is automatically incremented in the RV-3028-C7.
- 7) The Master, addressed as Receiver, can stop data transmission by not generating an acknowledge on the last byte that has been sent from the Slave-Transmitter. In this event, the Slave-Transmitter must leave the data line HIGH to enable the Master to generate a STOP condition.
- 8) Master sends out the STOP condition.

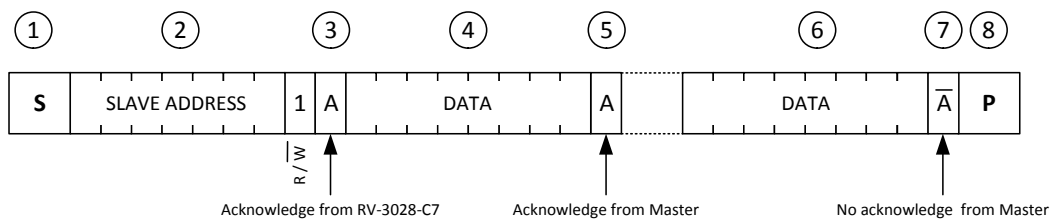

5.10. I²C-BUS IN SWITCHOVER CONDITION

To save power when the RV-3028-C7 is in VBACKUP Power state the bus I²C-bus interface is automatically disabled (high impedance) and reset. Therefore the communication via I²C interface should be terminated before the supply is switched from V_{DD} to V_{BACKUP}. When the bus communication is not terminated in a proper way, the time counters get corrupted.

If the I²C communication was terminated uncontrolled, the I²C has to be reinitialized by sending a STOP followed by a START after the device switched back from VBACKUP Power state to VDD Power state.

6. ELECTRICAL SPECIFICATIONS

6.1. ABSOLUTE MAXIMUM RATINGS

The following Table lists the absolute maximum ratings.

Absolute Maximum Ratings according to IEC 60134:

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
V _{DD}	Power Supply Voltage		-0.3		6.0	V
V _I	Input voltage	Input Pin	-0.3		V _{DD} +0.3	V
V _O	Output voltage	Output Pin	-0.3		V _{DD} +0.3	V
I _I	Input current		-10		10	mA
I _O	Output current		-10		10	mA
V _{ESD}	ESD Voltage	HBM ⁽¹⁾			±2000	V
		MM ⁽²⁾			±200	V
I _{LU}	Latch-up Current	Jedec ⁽³⁾			±100	mA
T _{OPR}	Operating Temperature		-40		85	°C
T _{STO}	Storage Temperature		-55		125	°C
T _{PEAK}	Maximum reflow condition	JEDEC J-STD-020C			265	°C

⁽¹⁾ HBM: Human Body Model, according to JESD22-A114.

⁽²⁾ MM: Machine Model, according to JESD22-A115.

⁽³⁾ Latch-up testing, according to JESD78., Class I (room temperature), level A (100 mA)

6.2. OPERATING PARAMETERS

For this Table, $T_A = -40\text{ }^\circ\text{C}$ to $+85\text{ }^\circ\text{C}$ unless otherwise indicated. $V_{DD} = 1.2$ to 5.5 V , TYP values at $25\text{ }^\circ\text{C}$ and 3.0 V .

Operating Parameters:

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
Supplies						
V_{DD}	Power Supply Voltage	Time-keeping mode ⁽¹⁾	1.1		5.5	V
		I ² C-bus (100 kHz)	1.2		5.5	
		I ² C-bus (400 kHz)	2.0		5.5	
V_{BACKUP}	Backup Supply Voltage		1.1		5.5	V
I_{VDD}	V_{DD} supply current timekeeping I ² C-bus inactive, CLKOUT disabled, average current	$V_{DD} = 1.1\text{ V}$ ⁽²⁾		40	300	nA
		$V_{DD} = 3.0\text{ V}$ ⁽²⁾		40	330	
		$V_{DD} = 5.0\text{ V}$ ⁽²⁾		40	400	
$I_{VDD:I2C}$	V_{DD} supply current during I ² C burst read/write, CLKOUT disabled	$V_{DD} = 1.2\text{ V}$, SCL = 100 kHz ⁽³⁾		2	15	μA
		$V_{DD} = 3.0\text{ V}$, SCL = 400 kHz ⁽³⁾		5	40	
		$V_{DD} = 5.0\text{ V}$, SCL = 400 kHz ⁽³⁾		7	60	
$I_{VDD:LEVEL}$	V_{DD} supply current in level switching mode I ² C-bus inactive, CLKOUT disabled	$V_{DD} = 3.0\text{ V}$, $T_A = 25\text{ }^\circ\text{C}$		115	180	nA
$I_{VDD:DIRECT}$	V_{DD} supply current in direct switching mode I ² C-bus inactive, CLKOUT disabled	$V_{DD} = 3.0\text{ V}$, $T_A = 25\text{ }^\circ\text{C}$		95	150	nA
$\Delta I_{VDD:CK32}$	Additional V_{DD} supply current ⁽⁴⁾	$V_{DD} = 3.0\text{ V}$, $F_{CLKOUT} = 32.768$ kHz, $C_L = 10\text{ pF}$		1		μA
$\Delta I_{VDD:CK1024}$		$V_{DD} = 3.0\text{ V}$, $F_{CLKOUT} = 1024\text{ Hz}$, $C_L = 10\text{ pF}$		30		nA
$\Delta I_{VDD:CK1}$		$V_{DD} = 3.0\text{ V}$, $F_{CLKOUT} = 1\text{ Hz}$, $C_L = 10\text{ pF}$		0.03		nA

(1) Clocks operating and RAM registers retained.


(2) All inputs and outputs are at 0 V or V_{DD} .

(3) 2.2k pull-up resistors on SCL/SDA, excluding external peripherals and pull-up resistor current. All other inputs (besides SDA and SCL) are at 0 V or V_{DD} . Test conditions: Continuous burst read/write, 55h data pattern, 25 μs between each data byte, 20 pF load on each bus pin.

(4) When CLKOUT is enabled the additional V_{DD} supply current ΔI_{VDD} can be calculated as follows:

$$\Delta I_{VDD} = C_L \times V_{DD} \times f_{OUT}, \text{ e.g. } \Delta I_{VDD} = 10\text{ pF} \times 3.0\text{ V} \times 32768\text{ Hz} = 980\text{ nA} \approx 1\text{ }\mu\text{A}$$

Typical characteristics in direct switching mode: $I_{VDD:DIRECT}$ @ $V_{DD} = 2.1\text{ V}$ and $I_{VBACKUP}$ vs. V_{BACKUP} , $T_A = 25\text{ }^\circ\text{C}$, I²C-bus inactive, CLKOUT disabled.

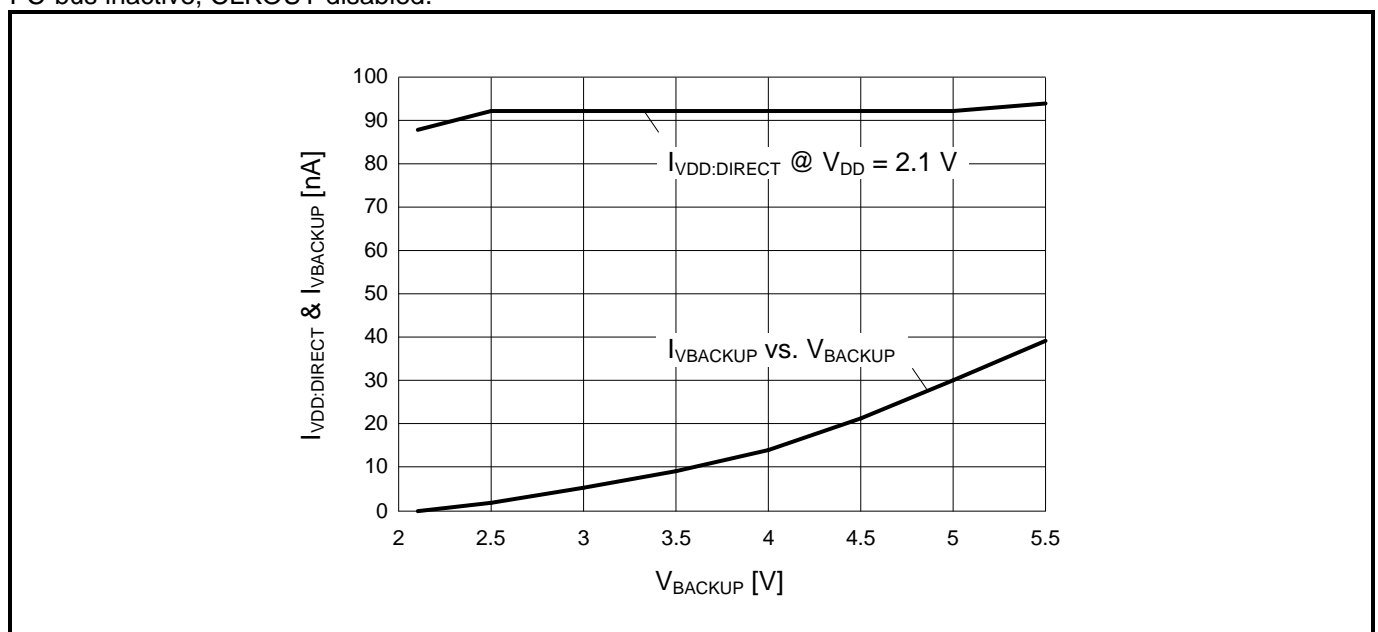

For this Table, $T_A = -40\text{ °C}$ to $+85\text{ °C}$ unless otherwise indicated. $V_{DD} = 1.2$ to 5.5 V , TYP values at 25 °C and 3.0 V .

Operating Parameters (continued):

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
Inputs						
V_{IL}	LOW level input voltage	$V_{DD} = 1.1\text{ V}$ to 5.5 V Pins: SCL, SDA, EVI			$0.2 V_{DD}$	V
V_{IH}	HIGH level input voltage		$0.8 V_{DD}$			V
I_{LEAK}	Input leakage current	$V_{SS} \leq V_I \leq V_{DD}$	-0.5		0.5	μA
C_I	Input capacitance	$V_{DD} = 3.0\text{ V}$, $T_A = 25\text{ °C}$ $f = 1\text{ MHz}$			7	pF
Outputs						
$V_{OL:CLK}$	LOW level output voltage CLKOUT	$V_{DD} = 1.1\text{ V}$, $I_{OL} = -0.1\text{ mA}$			0.1	V
		$V_{DD} = 3.0\text{ V}$, $I_{OL} = -1.0\text{ mA}$			0.3	
		$V_{DD} = 5.0\text{ V}$, $I_{OL} = -1.0\text{ mA}$			0.5	
$V_{OH:CLK}$	HIGH level output voltage CLKOUT	$V_{DD} = 1.1\text{ V}$, $I_{OH} = 0.1\text{ mA}$	1.0			V
		$V_{DD} = 3.0\text{ V}$, $I_{OH} = 1.0\text{ mA}$	2.7			
		$V_{DD} = 5.0\text{ V}$, $I_{OH} = 1.0\text{ mA}$	4.5			
V_{OL}	LOW level output voltage Pins: SDA, INT	$V_{DD} = 1.2\text{ V}$, $I_{OL} = -0.5\text{ mA}$			0.4	V
		$V_{DD} = 3.0\text{ V}$, $I_{OL} = -3.0\text{ mA}$			0.4	
		$V_{DD} = 5.0\text{ V}$, $I_{OL} = -3.0\text{ mA}$			0.3	
I_{OLEAK}	Output leakage current	$V_O = V_{DD}$ or V_{SS}	-0.5		0.5	μA
C_{OUT}	Output capacitance	$V_{DD} = 3.0\text{ V}$, $T_A = 25\text{ °C}$ $f = 1\text{ MHz}$			7	pF
Power On Reset						
V_{POR}	POR detection threshold		0.75	0.8	0.85	V
Trickle charger						
TCR 1 k Ω	Current limiting resistors	$V_{DD} = 5.0\text{ V}$, $V_{BACKUP} = 3.0\text{ V}$, including internal schottky diode	2	3	4	k Ω
TCR 3 k Ω			4.5	5.5	6.25	
TCR 6 k Ω			7.5	9.3	11.6	
TCR 11 k Ω			12.5	15.7	17.4	
Switchover						
$V_{HYST:DSM}$	Switchover hysteresis in direct switching mode	V_{DD} with respect to $V_{BACKUP} = 3.0\text{ V}$, $T_{OPR} = -40\text{ °C}$ to $+85\text{ °C}$		60		Mv
V_{DDSW}	Backup switchover threshold voltage	Relative to V_{DD}	1.8	2.0	2.2	V
$V_{HYST:LSM}$	Switchover hysteresis in level switching mode	V_{DD} with respect to $V_{BACKUP} = 3.0\text{ V}$, $T_{OPR} = -40\text{ °C}$ to $+85\text{ °C}$		100		Mv
EEPROM Characteristics						
V_{READ}	Read voltage		1.1			V
V_{PROG}	Programming voltage		1.5			
V_{WRITE}	Write voltage, only for voltage $\geq V_{DDSW}$		V_{DDSW}			
T_{PROG}	EEPROM programming time 1 byte		4		30	ms
	Write / erase cycles		100		10'000	cycle


6.3. OSCILLATOR PARAMETERS

For this Table, $T_A = -40\text{ }^\circ\text{C}$ to $+85\text{ }^\circ\text{C}$ unless otherwise indicated. $V_{DD} = 1.2$ to 5.5 V , TYP values at $25\text{ }^\circ\text{C}$ and 3.0 V .

Oscillator Parameters:

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
Xtal General						
F	Crystal Frequency			32.768		kHz
t_{START}	Oscillator start-up time at $V_{DD} = 3.0\text{ V}$	$T_A = 25\text{ }^\circ\text{C}$		0.5	1 3	s
V_{START}	Oscillator start-up voltage		1.3			V
$\Delta f/V$	Frequency vs. voltage characteristics	$V_{DD} = 1.1\text{ V to }5.5\text{ V}$ $T_A = 25\text{ }^\circ\text{C}$		0.5	1	ppm/V
V_{DDR}	V_{DD} rising slew rate	$V_{DD} = 1.1\text{ V to }3.6\text{ V}$ $V_{DD} = 3.6\text{ V to }5.5\text{ V}$			2.5 3.8	V/ms
V_{DDF}	V_{DD} falling slew rate	$V_{DD} = 5.5\text{ V to }1.1\text{ V}$			2.2	
δ_{CLKOUT}	CLKOUT duty cycle	$V_{DD} = 1.1\text{ V to }5.5\text{ V}$ $F_{CLKOUT} = 32.768\text{ kHz}$		50 \pm 10		%
Xtal Frequency Characteristics						
$\Delta F/F$	Frequency accuracy	$T_A = 25\text{ }^\circ\text{C}$		± 5		ppm
$\Delta F/F_{TOPR}$	Frequency vs. temperature characteristics	$T_{OPR} = -40\text{ }^\circ\text{C to }+85\text{ }^\circ\text{C}$ $V_{DD} = 3.0\text{ V}$		$-0.035\text{ ppm}/^\circ\text{C}^2 (T_{OPR}-T_0)^2 \pm 10\%$		ppm
T_0	Turnover temperature			$+25 \pm 5$		$^\circ\text{C}$
$\Delta F/F$	Aging first year max.	$T_A = 25\text{ }^\circ\text{C}$, $V_{DD} = 3.0\text{ V}$			± 3	ppm
Frequency Offset Correction						
$\Delta t/t$	OFFSET correction: Min. corr. step (LSB) and Max. corr. range	$T_A = -40\text{ }^\circ\text{C to }+85\text{ }^\circ\text{C}$	± 0.954		$+243.2/-244.1$	ppm
$\Delta t/t$	Achievable time accuracy	Calibrated at an initial temperature and voltage	-0.48		+0.48	ppm


6.3.1.XTAL FREQUENCY VS. TEMPERATURE CHARACTERISTICS

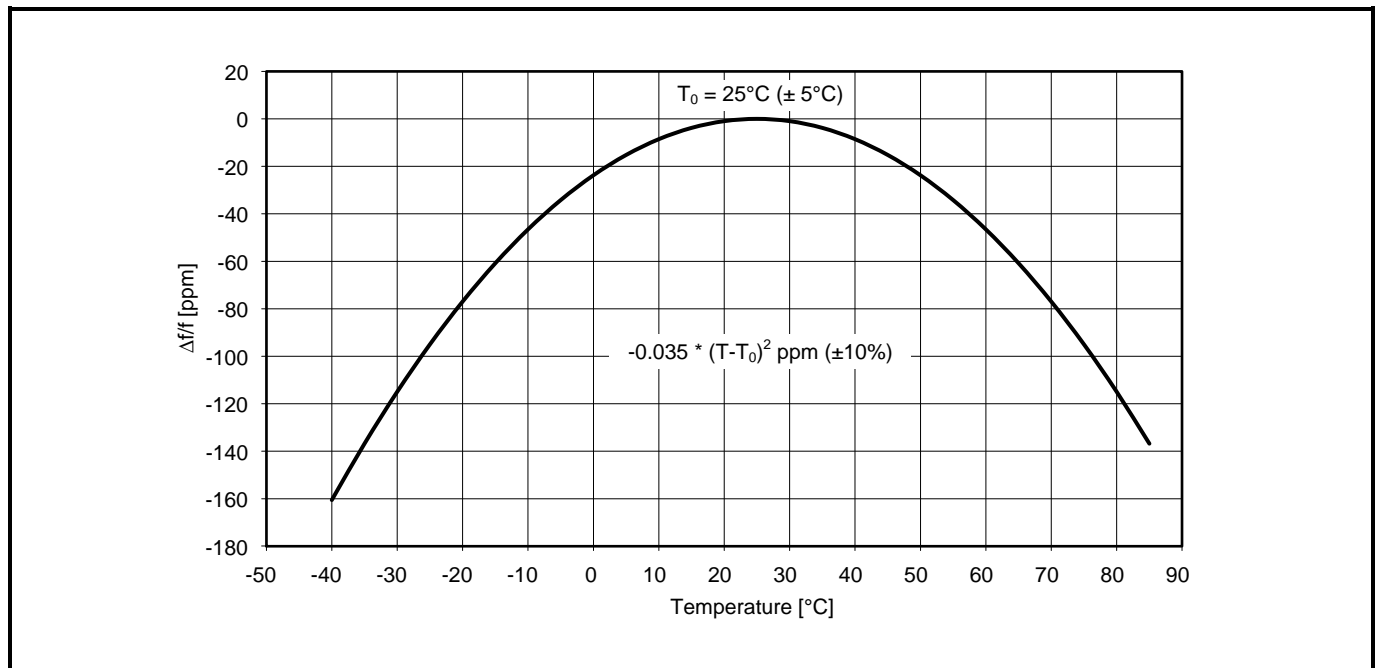

6.4. POWER ON AC ELECTRICAL CHARACTERISTICS

The following Figure describes the power on AC electrical characteristics for the CLKOUT pin. The clock output signal on CLKOUT pin is enabled by the CLKOE bit (EEPROM 35h), see also USE OF THE CONFIGURATION EEPROM WITH RAM MIRROR REGISTERS.

Power On AC Electrical Characteristics:

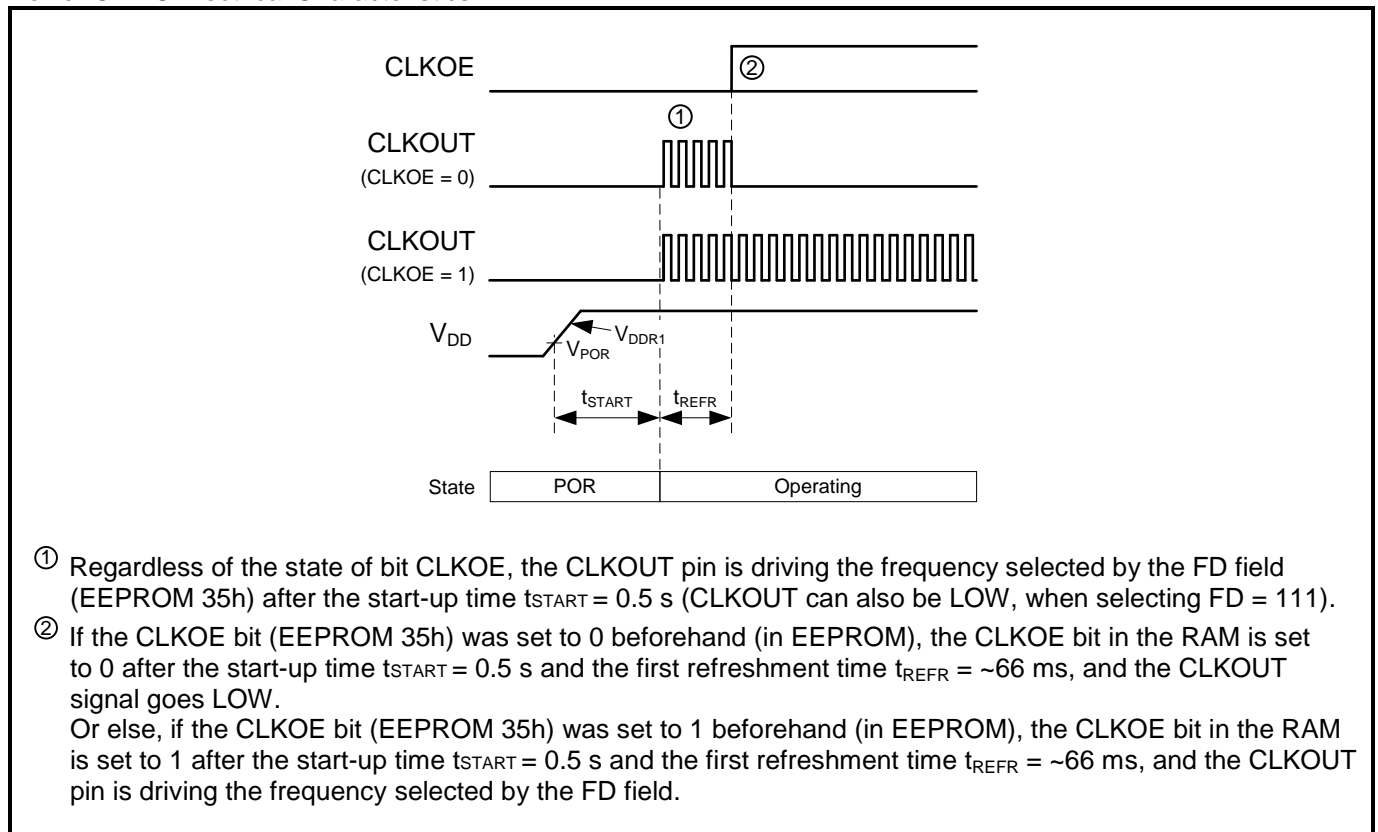

For this Table, T_A = -40 °C to +85 °C and V_{DD} = 1.2 to 5.5 V, TYP values at 25 °C and 3.0 V.


Power On AC Electrical Parameters:

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
V _{DDR1}	V _{DD} rising slew rate at initial power on reset (POR)	CLKOUT enabled (CLKOE = 1)	0.1		1	V/ms
t _{START}	Oscillator start-up time at V _{DD} = 3.0 V			0.5	3	s
t _{REFR}	First refreshment time				66	ms

6.5. I²C-BUS CHARACTERISTICS

The following Figure and Table describe the I²C AC electrical parameters.

I²C AC Parameter Definitions:

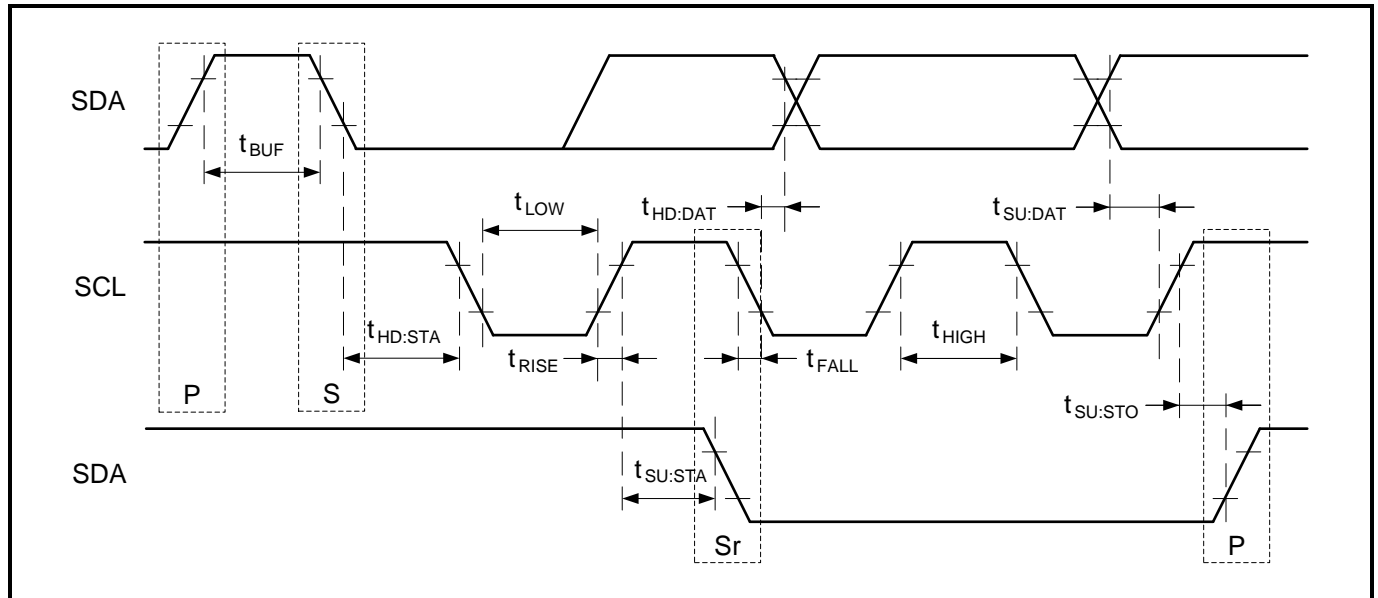

For the following Table, T_A = -40 °C to 85 °C, TYP values at 25 °C.

I²C AC Electrical Parameters:

SYMBOL	PARAMETER	Conditions	MIN	TYP	MAX	UNIT
f _{SCL}	SCL input clock frequency	V _{DD} ≥ 1.2 V	0		100	kHz
		V _{DD} ≥ 2.0 V	0		400	
t _{LOW}	Low period of SCL clock	V _{DD} ≥ 1.2 V	4.7			μs
		V _{DD} ≥ 2.0 V	1.3			
t _{HIGH}	High period of SCL clock	V _{DD} ≥ 1.2 V	4.0			μs
		V _{DD} ≥ 2.0 V	0.6			
t _{RISE}	Rise time of SDA and SCL	V _{DD} ≥ 1.2 V			1000	ns
		V _{DD} ≥ 2.0 V			300	
t _{FALL}	Fall time of SDA and SCL	V _{DD} ≥ 1.2 V			300	ns
		V _{DD} ≥ 2.0 V			300	
t _{HD:STA}	START condition hold time	V _{DD} ≥ 1.2 V	4.0			μs
		V _{DD} ≥ 2.0 V	0.6			
t _{SU:STA}	START condition setup time	V _{DD} ≥ 1.2 V	4.7			μs
		V _{DD} ≥ 2.0 V	0.6			
t _{SU:DAT}	SDA setup time	V _{DD} ≥ 1.2 V	250			ns
		V _{DD} ≥ 2.0 V	100			
t _{HD:DAT}	SDA hold time	V _{DD} ≥ 1.2 V	0			μs
		V _{DD} ≥ 2.0 V	0			
t _{SU:STO}	STOP condition setup time	V _{DD} ≥ 1.2 V	4.0			μs
		V _{DD} ≥ 2.0 V	0.6			
t _{BUF}	Bus free time before a new transmission	V _{DD} ≥ 1.2 V	4.7			μs
		V _{DD} ≥ 2.0 V	1.3			


S = Start condition, Sr = Repeated Start condition, P = Stop condition

Caution:

When accessing the RV-3028-C7, all communication from transmitting the Start condition to transmitting the Stop condition after access should be completed within 950 ms. If such communication requires 950 ms or longer, the I²C bus interface is reset by the internal bus timeout function.


7. TYPICAL APPLICATION CIRCUIT

7.1. OPERATING RV-3028-C7 WITH BACKUP SUPPLY VOLTAGE

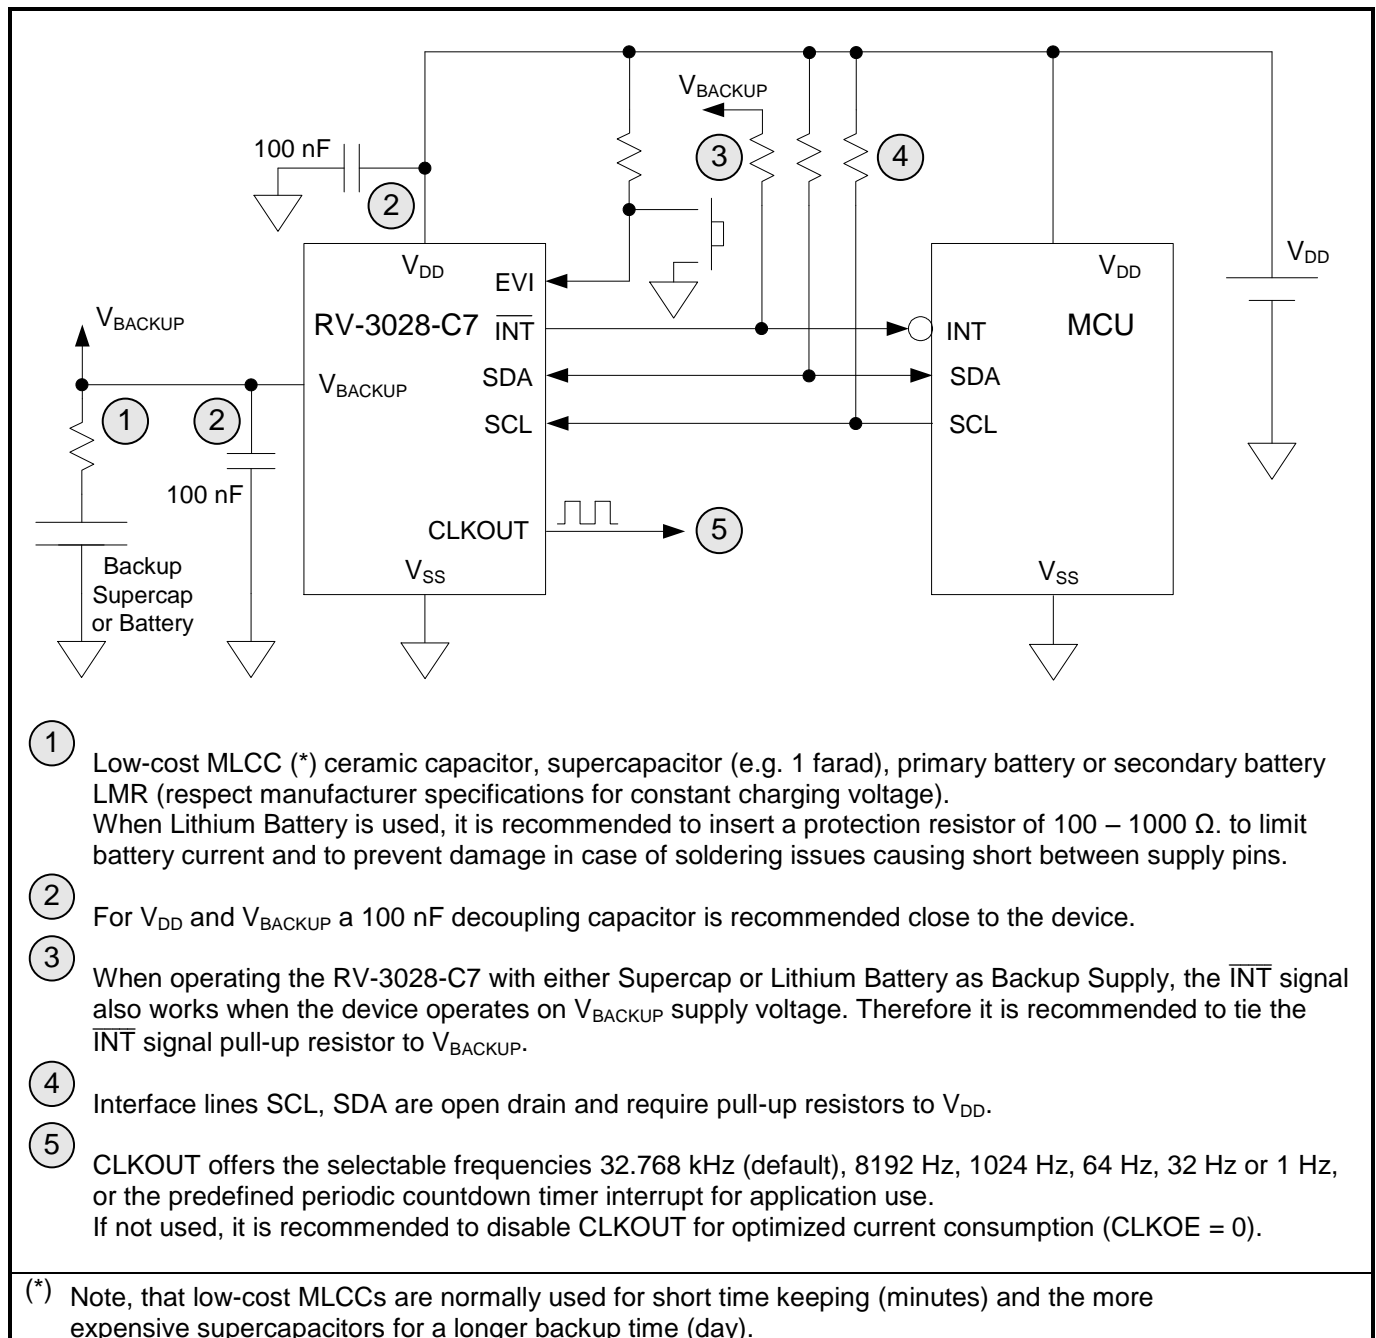

8. PACKAGE


8.1. DIMENSIONS AND SOLDER PAD LAYOUT

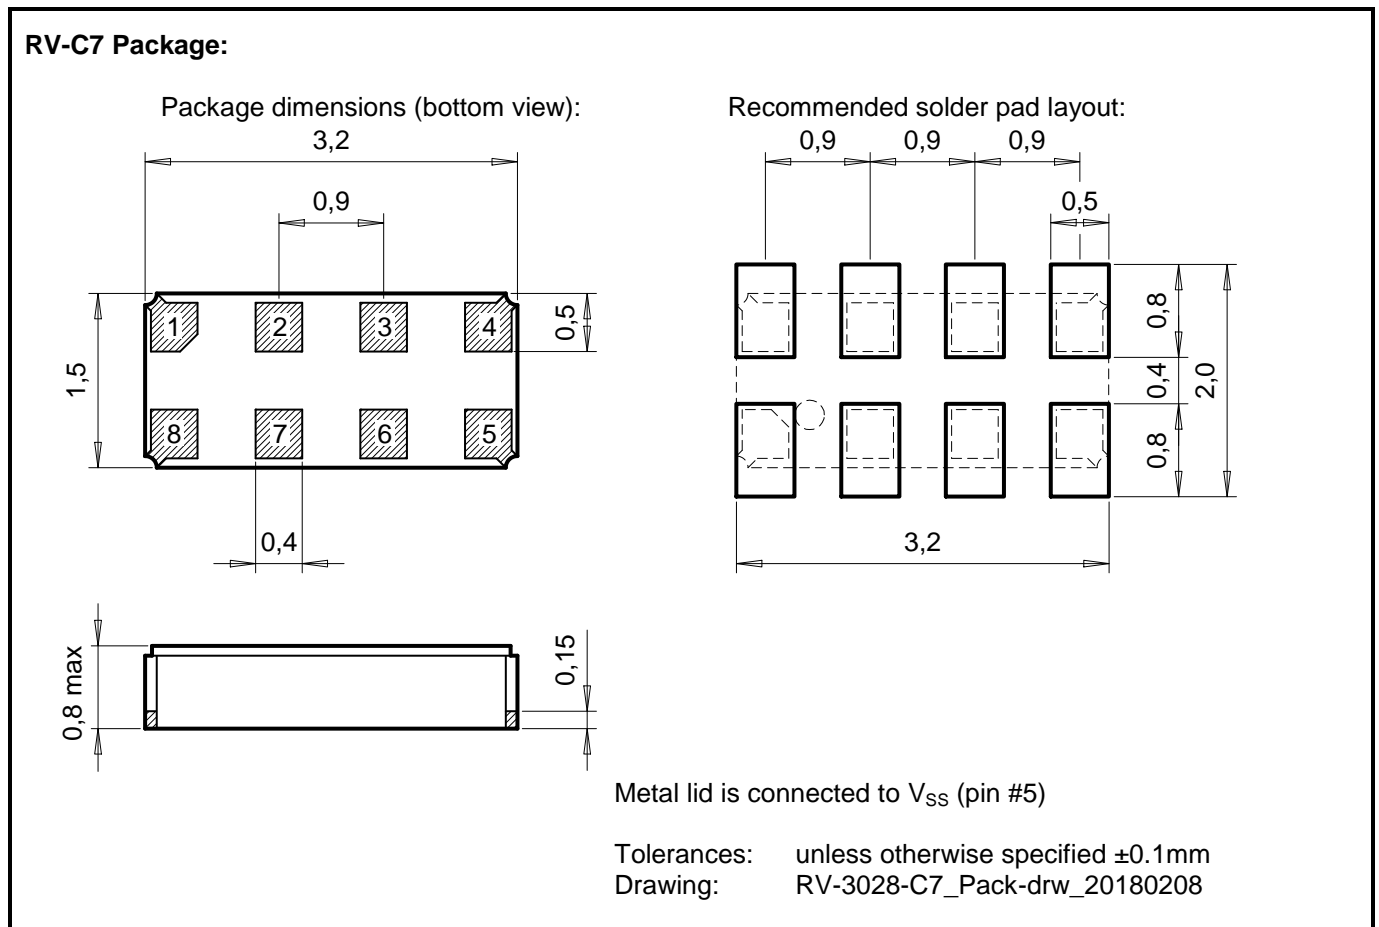

All dimensions in mm typical.


8.1.1. RECOMMENDED THERMAL RELIEF

When connecting a pad to a copper plane, thermal relief is recommended.

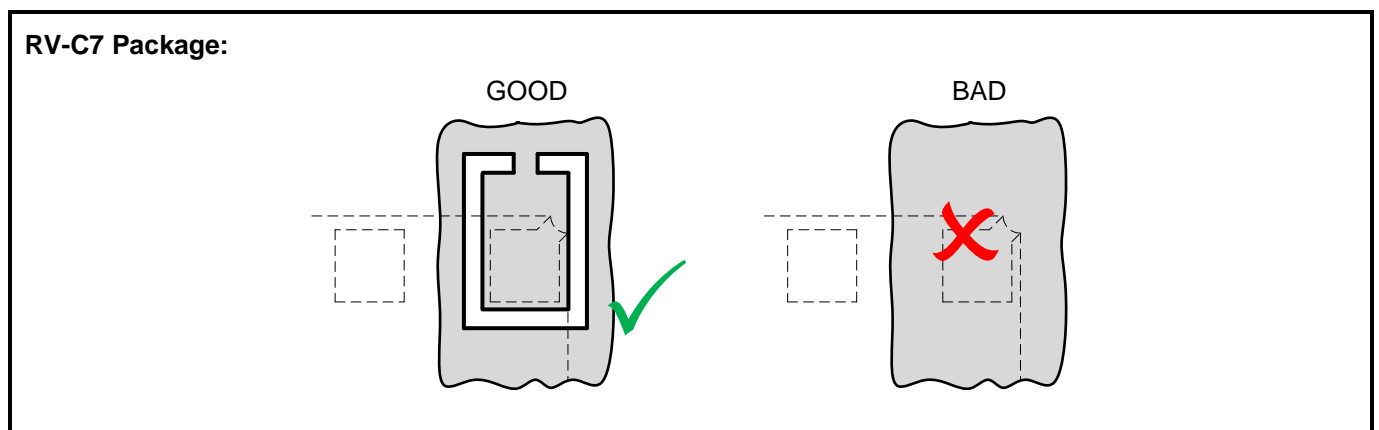

8.2. MARKING AND PIN #1 INDEX

Laser marking RV-3028-C7 Package: (top view)

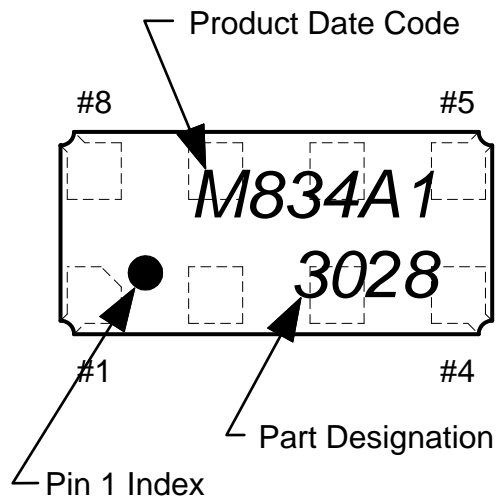


9. MATERIAL COMPOSITION DECLARATION & ENVIRONMENTAL INFORMATION

9.1. HOMOGENOUS MATERIAL COMPOSITION DECLARATION

Homogenous material information according to IPC-1752 standard

Material Composition RV-3028-C7:

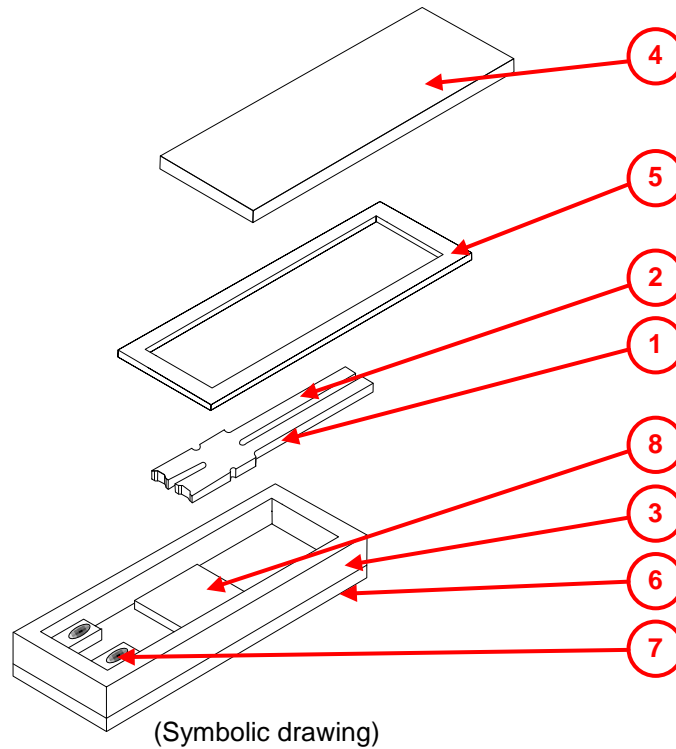

No.	Item Component Name	Sub Item Material Name	Material Weight		Substance Element	CAS Number	Comment
			(mg)	(%)			
1	Resonator	Quartz Crystal	0.13	100%	SiO ₂	14808-60-7	
2	Electrodes	Cr+Au	0.01	6%	Cr	Cr: 7440-47-3	
				94%	Au	Au: 7440-57-5	
3	Housing	Ceramic	6.90	100%	Al ₂ O ₃	1344-28-1	
4	Metal Lid	Kovar Lid	2.67	95%	Fe53Ni29Co18	Fe: 7439-89-6 Ni: 7440-02-0 Co: 7440-48-4	Metal Lid (Kovar)
				4.95%	Ni	Ni: 7440-02-0	Nickel plating
				0.05%	Au	Au: 7440-57-5	Gold plating
5	Seal	Solder Preform	0.54	80%	Au80 / Sn20	Au: 7440-57-5	
				20%		Sn: 7440-31-5	
6	Terminations	Internal and external terminals	0.38	80%	Mo	Mo: 7439-98-7	Molybdenum
				15%	Ni	Ni: 7440-02-0	Nickel plating
				5%	Au 0.5 micron	Au: 7440-57-5	Gold plating
7	Conductive adhesive	Silver filled Silicone glue	0.09	88%	Ag	Ag: 7440-22-4	
				12%	Siloxanes and silicones	68083-19-2	di-Me, vinyl group-terminated
				0%	Distillates, petroleum hydrotreated	64742-47-8	Does not appear in finished product
8	CMOS IC	Silicon Gold bumps	0.64	90%	Si	Si: 7440-21-3	
				10%	Au	Au: 7440-57-5	
Unit weight			11.4				

9.2. MATERIAL ANALYSIS & TEST RESULTS

Homogenous material information according to IPC-1752 standard

No.	Item Component Name	Sub Item Material Name	RoHS						Halogen				Phthalates			
			Pb	Cd	Hg	Cr+6	PBB	PBDE	F	Cl	Br	I	BBP	DBP	DEHP	DINP
1	Resonator	Quartz Crystal	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
2	Electrodes	Cr+Au	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
3	Housing	Ceramic	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
4	Metal Lid	Kovar Lid & Plating	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
5	Seal	Solder Preform	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
6	Terminations	Int. & ext. terminals	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
7	Conductive adhesive	Silver filled Silicone glue	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
8	CMOS IC	Silicon & Gold bumps	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd	nd
	MDL	Measurement Detection Limit	2 ppm				5 ppm		50 ppm				0.003%		0.01%	

nd = not detectable

Test methods:

RoHS

Test method with reference to IEC 62321-5: 2013

MDL: 2 ppm (PBB / PBDE: 5 ppm)

Halogen

Test method with reference to BS EN 14582:2007

MDL: 50 ppm

Phthalates

Test method with reference to EN 14372

MDL: 0.003 % (DINP 0.01%)

9.3. RECYCLING MATERIAL INFORMATION

Recycling material information according to IPC-1752 standard.

Element weight is accumulated and referenced to the unit weight of 11.4 mg.


Item Material Name	No.	Item Component Name	Material Weight		Substance Element	CAS Number	Comment
			(mg)	(%)			
Quartz Crystal	1	Resonator	0.13	1.14	SiO ₂	14808-60-7	
Chromium	2	Electrodes	0.0006	0.005	Cr	Cr: 7440-47-3	
Ceramic	3	Housing	6.90	60.74	Al ₂ O ₃	1344-28-1	
Gold	2 4 5 6 8	Electrodes Metal Lid Seal Terminations CMOS IC	0.53	4.63	Au	Au: 7440-57-5	
Tin	5	Seal	0.11	0.95	Sn	Sn: 7440-31-5	
Nickel	4 6	Metal Lid Terminations	0.19	1.67	Ni	Ni: 7440-02-0	
Molybdenum	6	Terminations	0.3	2.68	Mo	Mo: 7439-98-7	
Kovar	4	Metal Lid	2.53	22.33	Fe ₅₃ Ni ₂₉ Co ₁₈	Fe: 7439-89-6 Ni: 7440-02-0 Co: 7440-48-4	
Silver	7a	Conductive adhesive	0.079	0.7	Ag	Ag: 7440-22-4	
Siloxanes and silicones	7b	Conductive adhesive	0.011	0.10	Siloxanes and silicones	68083-19-2	di-Me, vinyl group-terminated
Distillates	7c	Conductive adhesive	0	0	Distillates	64742-47-8	hydrotreated petroleum, does not appear in finished products
Silicon	8	CMOS IC	0.58	5.07	Si	Si: 7440-21-3	
Unit weight (total)			11.4	100			

9.4. ENVIRONMENTAL PROPERTIES & ABSOLUTE MAXIMUM RATINGS

Package	Description
SON-8	Small Outline Non-leaded (SON), ceramic package with metal lid


Parameter	Directive	Conditions	Value
Product weight (total)			11.4 mg
Storage temperature		Store as bare product	-55 to +125°C
Moisture sensitivity level (MSL)	IPC/JEDEC J-STD-020D		MSL1
FIT / MTBF			available on request

Terminal finish:

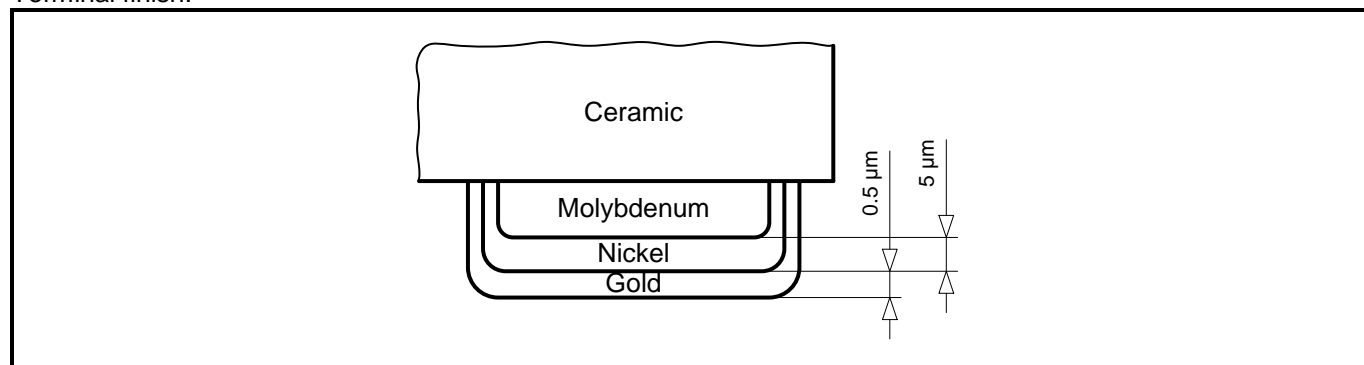

10. SOLDERING INFORMATION

Maximum Reflow Conditions in accordance with IPC/JEDEC J-STD-020C “Pb-free”

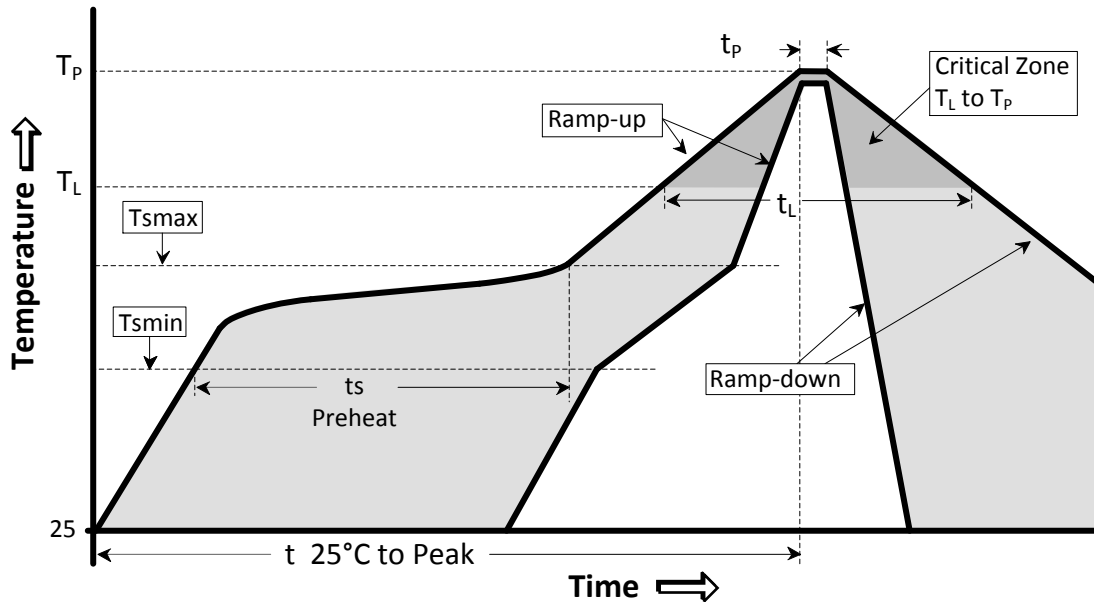

Temperature Profile	Symbol	Condition	Unit
Average ramp-up rate	($T_{s_{max}}$ to T_P)	3°C / second max	°C / s
Ramp down Rate	T_{cool}	6°C / second max	°C / s
Time 25°C to Peak Temperature	$T_{to-peak}$	8 minutes max	min
Preheat			
Temperature min	$T_{s_{min}}$	150	°C
Temperature max	$T_{s_{max}}$	200	°C
Time $T_{s_{min}}$ to $T_{s_{max}}$	t_s	60 – 180	sec
Soldering above liquidus			
Temperature liquidus	T_L	217	°C
Time above liquidus	t_L	60 – 150	sec
Peak temperature			
Peak Temperature	T_p	260	°C
Time within 5°C of peak temperature	t_p	20 – 40	sec

11. HANDLING PRECAUTIONS FOR MODULES WITH EMBEDDED CRYSTALS

The built-in tuning-fork crystal consists of pure Silicon Dioxide in crystalline form. The cavity inside the package is evacuated and hermetically sealed in order for the crystal blank to function undisturbed from air molecules, humidity and other influences.

Shock and vibration:

Keep the crystal / module from being exposed to **excessive mechanical shock and vibration**. Micro Crystal guarantees that the crystal / module will bear a mechanical shock of 5000 g / 0.3 ms.

The following special situations may generate either shock or vibration:

Multiple PCB panels - Usually at the end of the pick & place process the single PCBs are cut out with a router. These machines sometimes generate vibrations on the PCB that have a fundamental or harmonic frequency close to 32.768 kHz. This might cause breakage of crystal blanks due to resonance. Router speed should be adjusted to avoid resonant vibration.

Ultrasonic cleaning - Avoid cleaning processes using ultrasonic energy. These processes can damage crystals due to mechanical resonance of the crystal blank.

Overheating, rework high temperature exposure:


Avoid overheating the package. The package is sealed with a seal ring consisting of 80% Gold and 20% Tin. The eutectic melting temperature of this alloy is at 280°C. Heating the seal ring up to >280°C will cause melting of the metal seal which then, due to the vacuum, is sucked into the cavity forming an air duct. This happens when using hot-air-gun set at temperatures >300°C.

Use the following methods for rework:

- Use a hot-air- gun set at 270°C.
- Use 2 temperature controlled soldering irons, set at 270°C, with special-tips to contact all solder-joints from both sides of the package at the same time, remove part with tweezers when pad solder is liquid.

12. PACKING & SHIPPING INFORMATION

Reel: 7" = 178 mm

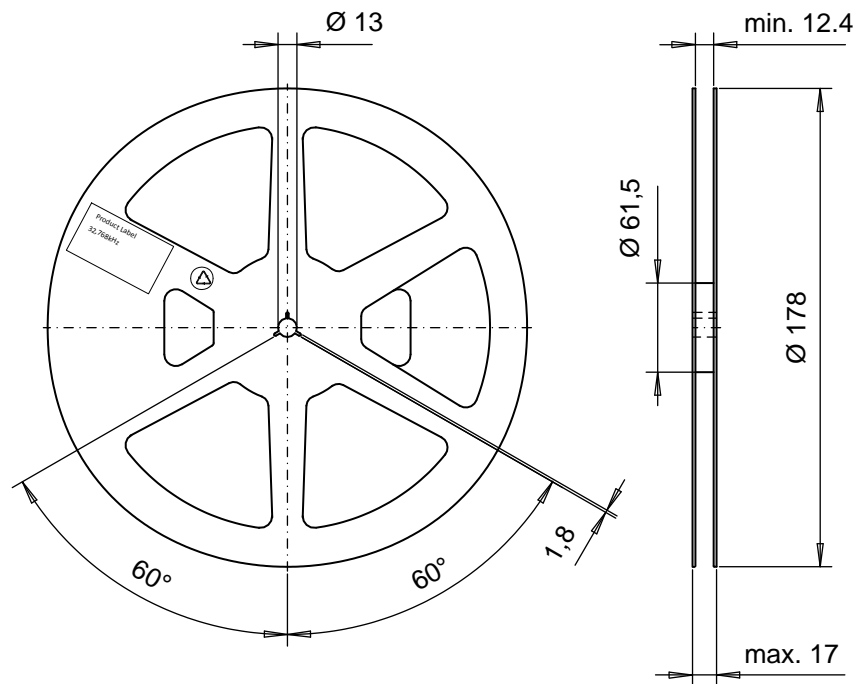


Carrier Tape:

Material: Polycarbonate, conductive

Width: 12 mm

Tape Leader and Trailer: Minimum length 300 mm

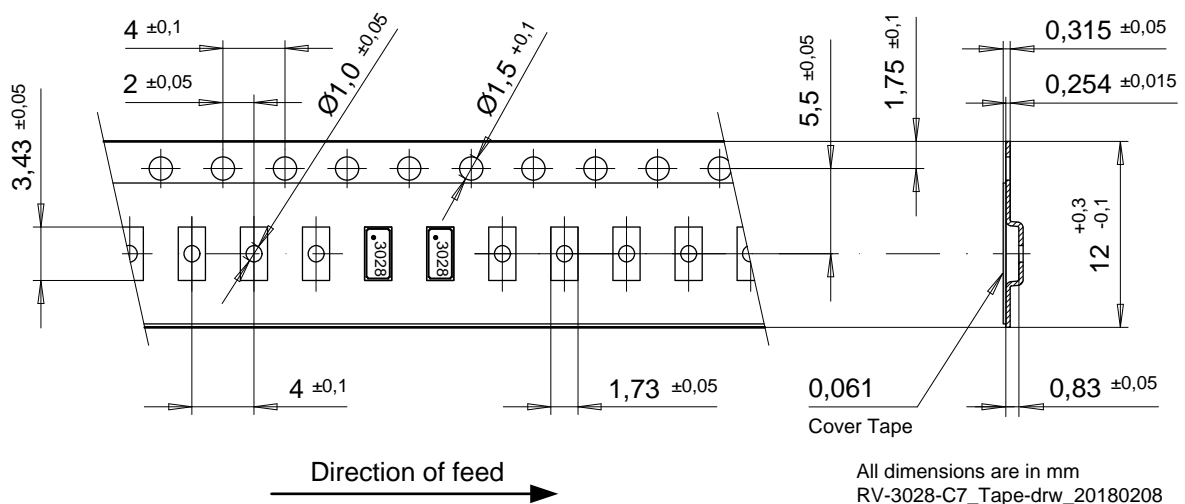

All dimensions are in mm
RV-3028-C7_Tape-drw_20180208

Cover Tape:

Tape: Polypropylene, 3M™ Universal Cover Tape (UCT)

Adhesive Type: Pressure sensitive, Synthetic Polymer

Thickness: 0.061 mm

Peel Method:

Medial section removal, both lateral stripes remain on carrier