


Proximity Magnetic Sensors Rectangular Body, MM series

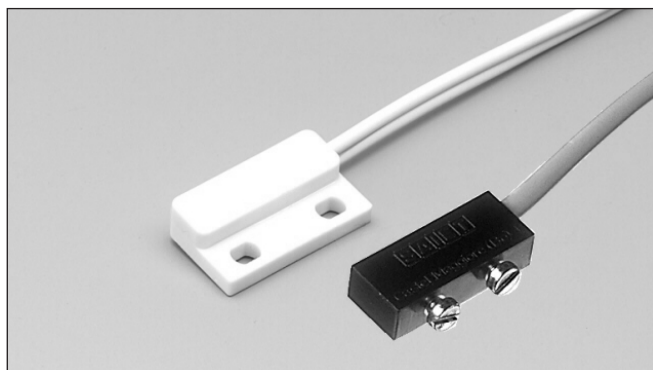

- Plastic rectangular case
- Extremely small dimensions
- High sensibility contacts
- NO or CO output functions

Product Description

The micro-miniature types are characterized by extremely small dimensions.

The MM.A.6 model contains, in a very small case, a very high sensibility contact, with

low hysteresis.

The two fixing holes, suited for M3 screws, allow simple mounting procedure over a large variety of applications.

Ordering Key

MM.A.3

Type _____
 Output Function _____
 Reed contact Type _____

Type Selection

Output function	External dimensions	Output connection	Reference
NO	14 x 23,5 x 6,1	Twin lead cable	MM.A.6
	7 x 27 x 11	PVC Cable	MM.A.3
Change-over			MM.S.1

General specification

Case	Plastic
Protection degree	IP67
Operating temperature	-25 to +75 °C


Electrical specifications

Contacts	3	6	S.1
Max switching voltage	500 Vac	100 Vdc	100 Vac
Max switching current	0,5 A	1 A	0,25 A
Max switching power	10 VA	10 VA	5 VA

Operating distance

Magnetic Units	CL.1	CL.2	CL.3	CL.4
MM.S.1, MM.A.3	10	15	22	35
MM.A.6	14	20	30	40

Dimensions

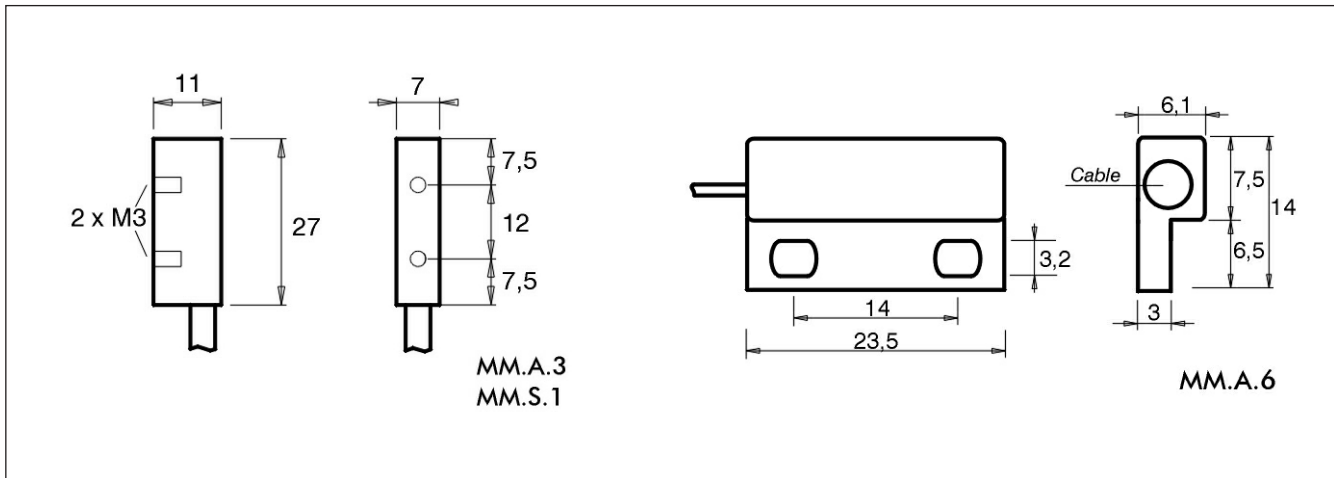

Wiring Diagrams

