




TOP VIEW




SIDE VIEW

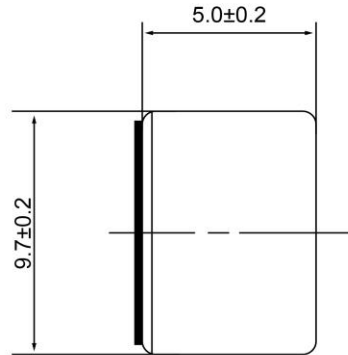

BOTTOM VIEW

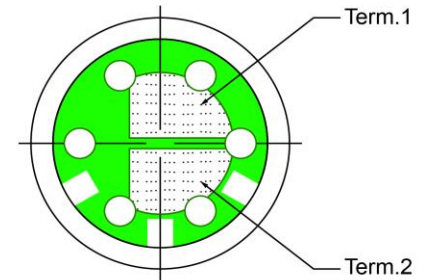

Specifications			Notes	Revision History					
Description	Value	Unit		Version	Description	Date	Approved		
Directivity	Noise Canceling		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS  DB UNLIMITED	1	Released from Engineering	10/21/2013	J.S		
Technology	Electret Condenser								
Sensitivity	-47	(dB)							
Frequency Range	100 ~ 10,000	(Hz)							
Rated Voltage	1.5	(V)							
Output Impedance	680	(Ohm)							
Connection Method	Solder Pads								
Voltage Range	1.5 ~ 10	(V)							
Max Rated Current	0.5	(mA)							
Minimum Signal to Noise Ratio	>58	(dB)							
Operating Temperature	-20 ~ +60	°C							
Storage Temperature	-20 ~ +70	°C							
				Drawn by	Date	Checked by	Date	Approved by	Date
				A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013
				Electret Condenser Microphone			MN094701-1		

Additional considerations can be found at www.dbunlimitedco.com/technical-articles.