



The Leading Enterprise Internet of Things Solution

ALTA Wireless Thermostat

General Description

The Monnit ALTA thermostat is designed specifically for remote configuration and energy savings. It features an integrated motion sensor to auto detect if an area or room is occupied and can be set to enter an energy saving state when not needed. The thermostat will allow you to set a maximum and minimum temperature range for both occupied and non-occupied states. The system will auto adjust comfort levels when personnel arrive and automatically return to normal when they leave. It is also a perfect solution for public buildings such as corporate facilities or schools and churches as there are no physical buttons on the device. This prevents random adjustments by unauthorized people.

Features

- Allows for remote setting and monitoring of HVAC systems.
- Detects motion for occupied/non-occupied status.
- Prevents unauthorized adjustments or tampering.
- Configuration lockout jumper prevents changes at the hardware level.
- Full functionality and startup without a gateway (gateway is required for configuration changes and to monitor the device in iMonnit).

Example Applications


- Office buildings.
- Schools and churches.
- Stores and restaurants.
- Sports and concert venues.
- Remote buildings.

ALTA Wireless Thermostat Features


- Wireless range of 1,200+ feet through 12+ walls *
- 900 MHz Frequency Hopping Spread Spectrum (FHSS) 868 and 433 MHz Frequency Agile
- Improved interference immunity
- Encrypt-RF® Security (Diffie-Hellman Key Exchange + AES-128 CBC for sensor data messages)
- Onboard data memory stores up to 512 readings per sensor:
 - 10-minute heartbeats = 3.5 days
 - 2-hour heartbeats = 42 days
- Over-the-air updates (future proof)
- Powered by HVAC system

* Actual range may vary depending on environment.

Wireless Range Comparison

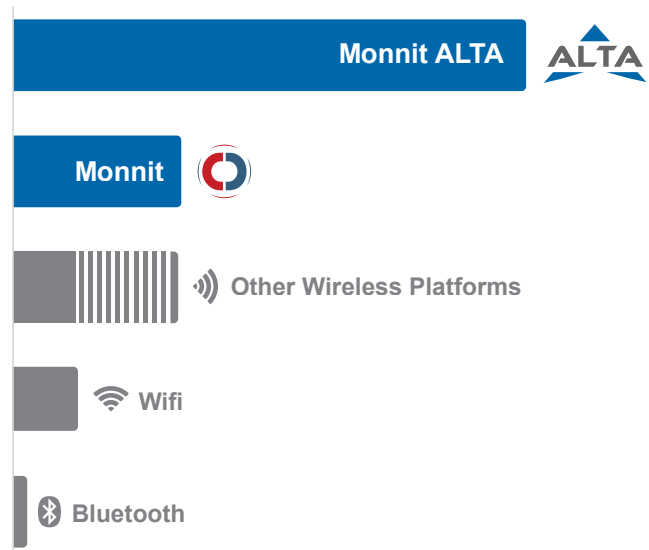

ALTA Wireless Thermostat Specifications


Supply Voltage	12 VAC - 24 VAC (powered via HVAC system)
Current Consumption	0.7 μ A (sleep mode) 2 mA (radio idle/off mode) 2 mA (measurement mode) 25 mA (radio RX mode) 35 mA (radio TX mode)
Operating Temperature Range	-40°C to 85°C (-40°F to 185°F) *
Temperature Reading Accuracy	\pm 1°C
RH Accuracy	\pm 3% under normal conditions (10% - 90% RH) **
RH Operating Range	0 – 100% RH **
RH Response Time	8 sec (tau 63%) **
Motion Sensor Detection Range	16.4 ft (5 m)
Indicator Lights	Six LED indicators (Heating, Cooling, Fan, Power, Occupied, Radio (RF))
Pass-through Current Rating on Heat, Cool, and Fan Connections	Continuous: 1 A RMS Surge: 8.5 A Peak
Peak Voltage on Heat, Cool, and Fan Connections	+/- 800 Volts
Dimensions	5.5 x 3.355 x 1.25 in. (139.7 x 85.217 x 31.75 mm)
Wireless Range	1,200+ ft. non-line-of-sight
Security	Encrypt-RF® (256-bit key exchange and AES-128 CTR)
Certifications	 900 MHz product; FCC ID: ZTL- RFSC1 and IC: 9794A-RFSC1. 868 and 433 MHz product tested and found to comply with: CISPR 22:2008-09 / EN 55022:2010 - Class B and ETSI EN 300 220-2 V2.4.1 (2012-05).

* At temperatures above 100°C, it is possible for the board circuitry to lose programmed memory.

** If humidity sensor option is installed. If thermistor option is present the thermostat only reads temperature and reports a value of 0% humidity.

Note: The thermostat features a physical configuration lockout jumper which can be set to prevent changes to any settings, even through the iMonnit portal. This prevents any hacking or remote tampering of any kind. If used, the physical jumper will need to be removed to change settings.

Thermostat Connections

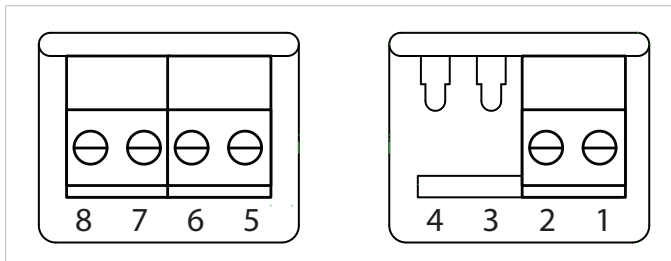

Pin	Description	Color	Identifier
1	Common	Blue or Black	C
2	Line	Red	R, Rc
3	No Connect		
4	No Connect		
5	Fan	Green	G
6	Cool	Yellow	Y
7	Heat	White	W
8	No Connect		