

MOD5213

Core Module

100 Version



DATASHEET

Key points

- Use as a high-performance single board computer or add to a new or existing design
- Industrial temperature range (-40°C to 85°C)
- Customize with development kit

Device connectivity

- 3 UARTs, I²C, CAN, SPI
- 33 digital I/Os
- Eight 12-bit analog-to-digital converters (ADC)
- Eight pulse width modulators (PWM)


Performance and memory

- 32-bit 66 MHz processor
- 32KB SDRAM and 256KB Flash

Companion development kit

The following is available with the development kit:

- Customize any aspect of operation including data filtering, or custom applications
- Development software: NB Eclipse IDE, graphical debugger, deployment tools, and examples
- System software: uC/OS RTOS, ANSI C/C++ compiler and linker

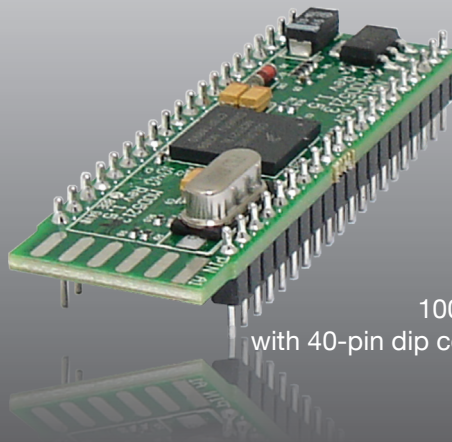

100 Version
with 40-pin dip connector

Specifications

Processor

32-bit Freescale ColdFire 5213 CPU running at 66MHz

Data I/O Interface (P1)

- Up to 3 UARTs
- Up to 1 I²C
- Up to 1 CAN 2.0b controller
- Up to 1 SPI
- Up to 33 digital I/O
- Up to eight 12-bit analog-to-digital converters (ADC)
- Up to 8 pulse width modulators (PWM)
- Up to 4 external timer in or outputs
- Up to 3 external IRQs
- Up to 4 general purpose timers (GPT)

Serial Configurations

The UARTs can be configured in the following way:

- Up to 3 TTL ports
- Add external level shifter for RS-232
- Add external level shifter for RS-422/485 (up to one port)

Note: UART 1 also provides RTS/CTS hardware handshaking signals.

Physical Characteristics

Form Factor: Industry Standard 40-pin DIP (two standard single row 20-pin 0.1" headers)

Dimensions: 2.24" x .700"

Power

DC Input Voltage: 5V – 7V, or 3.3V Regulated

Max Operating Current: 120mA

Environmental Operating Temperature

-40° to 85° C

RoHS Compliance

The Restriction of Hazardous Substances guidelines ensure that electronics are manufactured with fewer environment harming materials.

Part Numbers

MOD5213 Core Module

Part Number: MOD5213-100IR

MOD5213 Development Kit

Part Number: NNDK-MOD5213-KIT

Kit includes all the hardware and software you need to customize the included platform hardware. See NetBurner Store product page for package contents.

Ordering Information

E-mail: sales@netburner.com

Online Store: www.NetBurner.com

Telephone: 1-800-695-6828

MOD5213

Pinout and Signal Description

The module has two 20-pin connectors that connect to one of our standard NetBurner development carrier boards, or a board you create on your own. Table 1 provides pin function descriptions of the module connector. Reference Freescale Manual for CPU pin function details.

Table 1: Pinout and Signal Descriptions for JP1 Connector ⁽¹⁾

JP1 Connector							
Pin	CPU Pin	Function 1	Function 2	Function 3	General Purpose I/O	Description	Max Voltage
1	A3	RESET				Processor Reset Input ²	3.3VDC
2	D1	UART0_RX			Yes	UART 0 Receive	3.3VDC
3	D2	UART0_TX			Yes	UART 0 Transmit	3.3VDC
4	E2	I2C_SDA	CAN_RX	UART2_RX	Yes	PC Serial Data or CAN Receive or UART 2 Receive	3.3VDC
5	E1	I2C_SCL	CAN_TX	UART2_TX	Yes	PC Serial Clock or CAN Transmit or UART 2 Transmit	3.3VDC
6	C6	IRQ1	SYNCA	PWM1	Yes	External Interrupt 1 or External Timer Clock Input A or PWM 1 Output Signal/Input Capture	3.3VDC
7	C5	IRQ4			Yes	Externat Interrupt 4	3.3VDC
8	C4	IRQ7			Yes	Externat Interrupt 7	3.3VDC
9	H8	VDDA				ADC Voltage Supply	3.3VDC
10	J8	VRH				ADC Reference Voltage High Input	3.3VDC
11	G6	ADC_IN2			Yes	Analog to Digital Converter Input 2	3.3VDC
12	H6	ADC_IN1			Yes	Analog to Digital Converter Input 1	3.3VDC
13	J6	ADC_IN0			Yes	Analog to Digital Converter Input 0	3.3VDC
14	G7	ADC_IN3			Yes	Analog to Digital Converter Input 3	3.3VDC
15	H9	ADC_IN7			Yes	Analog to Digital Converter Input 7	3.3VDC
16	G9	ADC_IN6			Yes	Analog to Digital Converter Input 6	3.3VDC
17	G8	ADC_IN5			Yes	Analog to Digital Converter Input 5	3.3VDC
18	F9	ADC_IN4			Yes	Analog to Digital Converter Input 4	3.3VDC
19	H7 J9	VSSAVVRL				ADC Reference Ground	-
20	J1	VSS				Core Ground	-
21	H3	T3IN	T3OUT	PWM6	Yes	Timer Input 3 or Timer Output 3 or PWM 6 Output Signal/Input Capture	3.3VDC
22	J3	T2IN	T2OUT	PWM4	Yes	Timer Input 2 or Timer Output 2 or PWM 4 Output Signal/Input Capture	3.3VDC
23	G4	T1IN	T1OUT	PWM2	Yes	Timer Input 1 or Timer Output 1 or PWM 2 Output Signal/Input Capture	3.3VDC
24	H4	T0IN	T0OUT	PWM0	Yes	Timer Input 0 or Timer Output 0 or PWM 0 Output Signal/Input Capture	3.3VDC
25	D8	GPT3		PWM7	Yes	General Purpose Timer 3 or PWM 7 Output Signal/Input Capture	3.3VDC
26	D9	GPT2		PWM5	Yes	General Purpose Timer 2 or PWM 5 Output Signal/Input Capture	3.3VDC
27	E9	GPT1		PWM3	Yes	General Purpose Timer 1 or PWM 3 Output Signal/Input Capture	3.3VDC