




File: E209153



ISO9001:2008 Certified

### Mechanical Specifications (mm)

	D:	31.0	± max
	T:	10.0	± max
	Lead Diameter	1.3	± nom
	S:	7.8	± nom
	L:	38.0	± nom
	Coating Lead Run Down (straight Leads)	4.0	± max
	B:	7.80	± nom
	C:	6.70	± nom

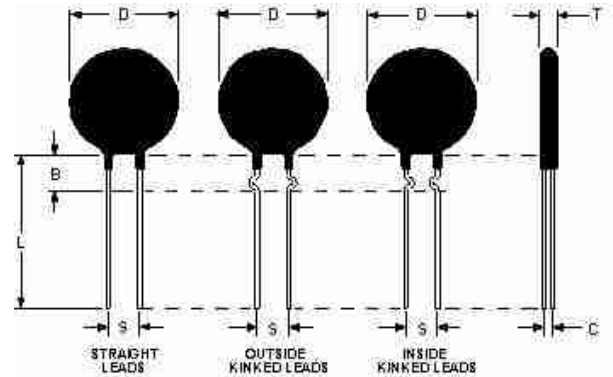

### Electrical Specifications

	Resistance:	7.0	Ω	± 20 %
Max Steady State Current upto 65°C:	15.00	A		
Max Rec. Energy Rating:	250	J		
Actual Failure Instantaneous Energy:	500	J		
Maximum Capacitance @ 120 VAC:	17,000	μf		
Maximum Capacitance @ 240 VAC:	4,341	μf		
Maximum Capacitance @ 440 VAC:	1,003	μf		
Maximum Capacitance @ 680 VAC:	500	μf		
Resistance @ 100% Max Current:	0.00	Ω		
Resistance @ 50% Max Current:	0.16	Ω		
Body Temperature at 100% Max Current:	214.00	°c		
Dissipation Constant:	63.7	mw/°c		
Thermal Time Constant:	194	Sec.		
Material Type (for Beta and Curve):	G			

<b>MS32 7R015</b>	
Date: 08/06/2020	Drawn by: Erin Landis
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A