

2.2A SURFACE MOUNT STANDARD RECOVERY BRIDGE RECTIFIER
Product Summary


V _{RRM} (V)	I _F (A)	V _F Max (V) @ I _F = 1.1A	I _R Max (μA)
1000	2.2	0.92	5

General Description


Suitable for AC to DC bridge full wave rectification for SMPS, LED lighting, adapter, battery charge, home appliances, office equipment, and telecommunication applications.

Mechanical Data


- Package: MSBL
- Package Material: Plastic Material, UL Flammability Classification 94V-0 (No Br, Sb, Cl)
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish – Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 (63)
- Polarity Indicator: Symbol Molded on Body
- Weight: 0.216 grams (Approximate)



Top View



Pin Diagram



Internal Schematic


Features

- Glass Passivated Die Construction
- Rating to 1000V PRV
- Low V_F
- Compact, Thin Profile Package Design
- Ideal for SMT Manufacturing
- Reliable Robust Construction
- **Lead-Free Finish; RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please [contact us](mailto:contact@diodes.com) or your local Diodes representative.**
<https://www.diodes.com/quality/product-definitions/>

Ordering Information (Note 4)

Part Number	Qualification	Package	Packing	
			Qty.	Carrier
MSB22ML-13	Commercial	MSBL	2500pcs	Tape & Reel

- Notes:
1. EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant. All applicable RoHS exemptions applied.
 2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
 4. For packaging details, go to our website at <https://www.diodes.com/design/support/packaging/diodes-packaging/>.

Marking Information


MB22ML = Product Type Marking Code
 D = Manufacturers' Code Marking
 YWW = Date Code Marking
 Y = Last Digit of Year (ex: 1 = 2021)
 WW = Week Code (01 to 53)

Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	1000	V
Maximum DC Blocking Voltage	V _{DC}	1000	V
Maximum Average Rectified Output Current T _C = +110°C	With Heatsink I _{F(AV)}	2.2	A
Peak Forward Surge Current 8.3ms Single Half Sine Wave Superimposed on Rated Load	T _J = +25°C T _J = +125°C I _{FSM}	90 70	A
Peak Forward Surge Current 1.0ms Single Half Sine Wave Superimposed on Rated Load	T _J = +25°C T _J = +125°C I _{FSM}	180 145	A
I ² t Rating for Fusing (t = 8.3ms)	I ² t	33	A ² s
Operating Temperature Range	T _J	-55 to +150	°C
Storage Temperature Range	T _{STG}	-55 to +150	°C

Electrical Characteristics

Characteristic	Test Conditions	Symbol	Typ.	Max	Unit
Forward Voltage	I _F = 1.1A T _J = +25°C T _J = +125°C	V _F	0.87 0.75	0.92 —	V
Forward Voltage	I _F = 2.2A T _J = +25°C T _J = +125°C	V _F	0.92 0.81	—	V
Leakage Current	V _R = 1000V T _J = +25°C T _J = +125°C	I _R	—	5 500	μA
Typical Junction Capacitance (Note 5)		C _J	35	—	pF

Thermal Characteristics

Characteristic	Symbol	Typ.	Unit
Typical Thermal Resistance (Note 6)	R _{θJC} R _{θJL} R _{θJA}	10 15 55	°C/W

- Notes:
5. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
 6. Thermal resistance junction to case, lead and ambient. Unit mounted on glass-epoxy substrate with 1oz/ft² 20x20mm copper pad per pin.

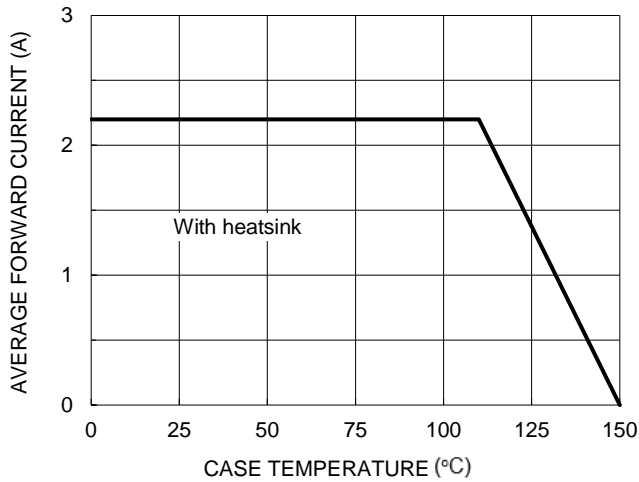


Figure 1. Forward Current Derating Curve

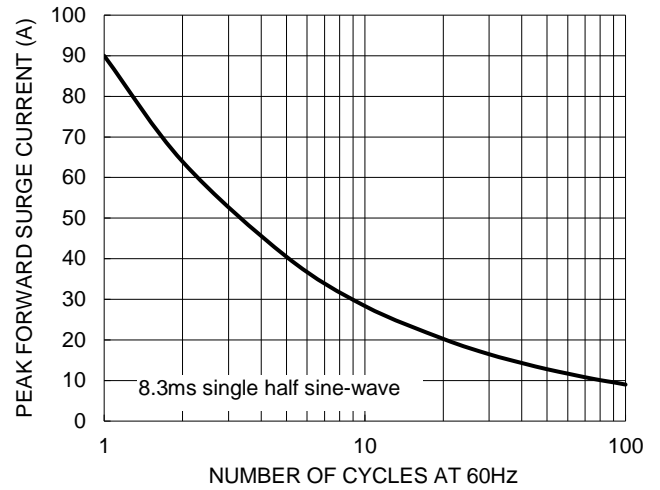


Figure 2. Maximum Non-repetitive Surge Current

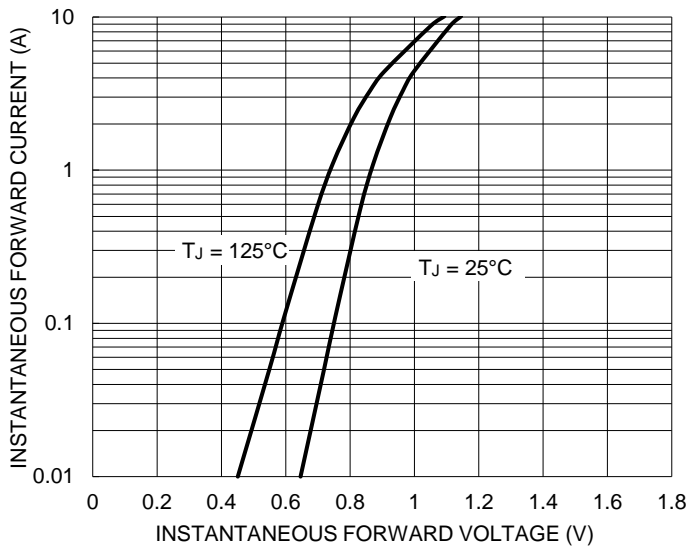


Figure 3. Typical Forward Characteristics

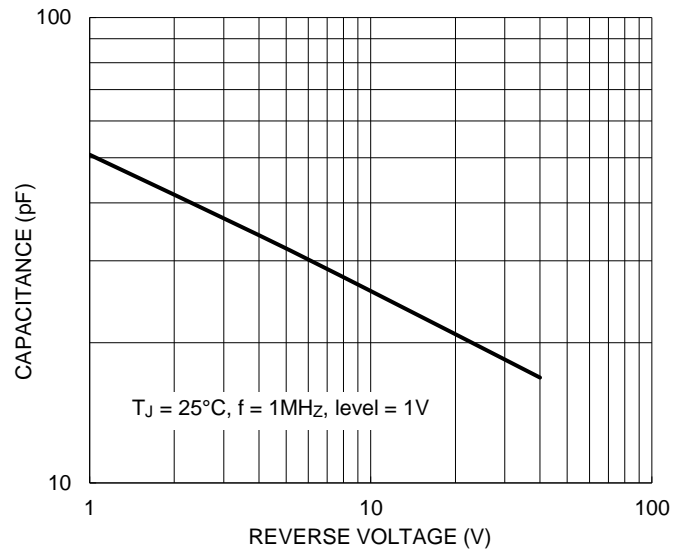


Figure 4. Typical Junction Capacitance

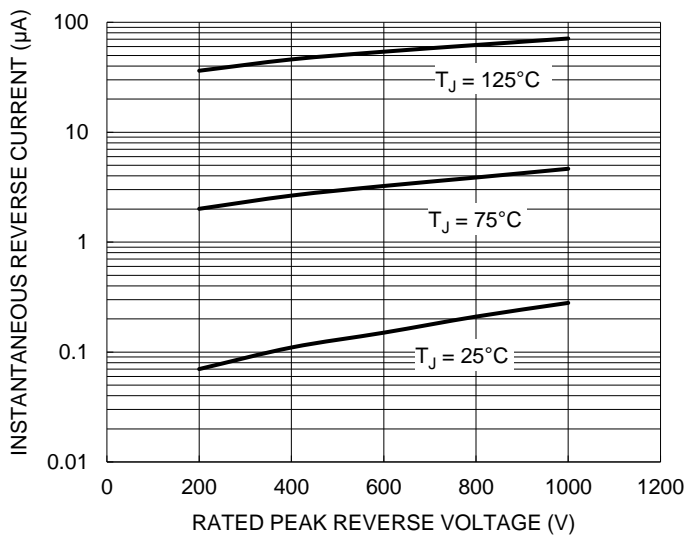


Figure 5. Typical Reverse Characteristics


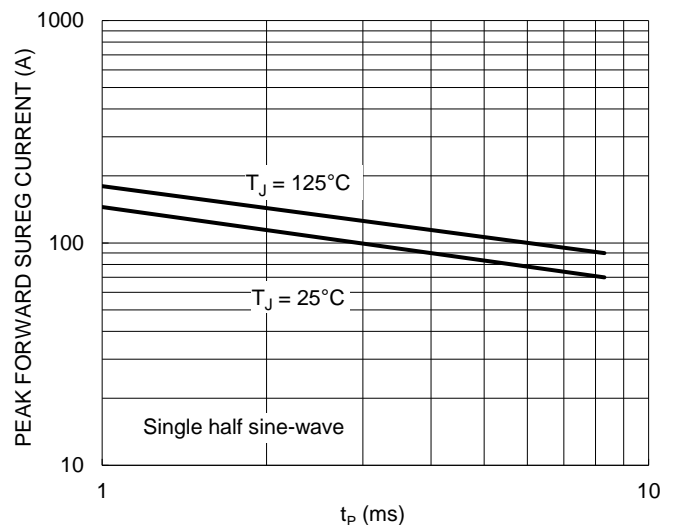


Figure 6. Non-Repetitive Surge Current

Package Outline Dimensions

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

MSBL

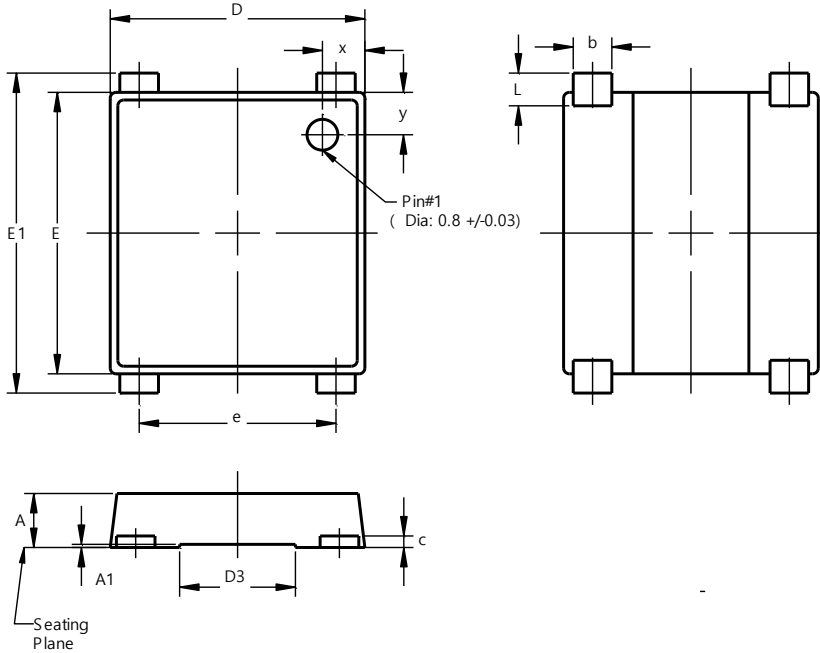


MSBL			
Dim	Min	Max	Typ
A	1.30	1.50	1.40
A1	0.04	0.08	0.06
b	0.95	1.15	1.00
c	0.27	0.40	0.30
D	6.50	6.70	6.60
D3	2.90	3.10	3.00
E	7.20	7.40	7.30
E1	7.90	8.60	8.30
e	5.00	5.20	5.10
L	0.65	1.05	0.85
x	0.95	1.25	1.10
y	0.95	1.25	1.10
All Dimensions in mm			

Suggested Pad Layout

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

MSBL

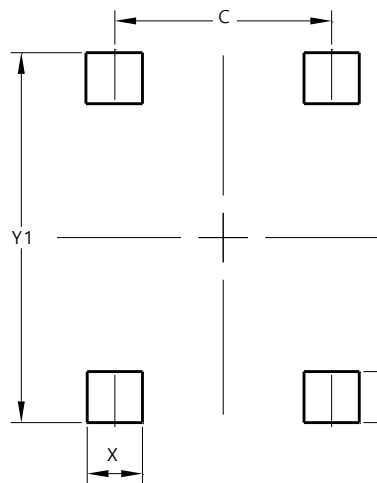

Dimensions	Value (in mm)
C	5.10
X	1.30
Y	1.20
Y1	8.70