



Mallory Sonalert Products, Inc.

Part #:

MSW5DM

Sales Outline Drawing

Revision:

C

Specifications:

cUL Recognized to IEC60601-1-8 AMD2:2020

| | |
|------------------------|-----------------------------------------------------------------------|
| Sound Level Category: | Loud |
| Mode of Operation: | Drug or Fluid Delivery Melody Medium Priority repeating every 7.5 sec |
| Voltage Rating: | 3.3 - 5.5 VDC |
| Loudness @ 10cm: | 85 to 95 dB(A) Typ. |
| Average Current Draw: | <250mA Typ |
| Ipk Current*: | 400mA |
| Housing Material: | Valox (UL94V-0), Color: Black |
| Storage Temperature: | -30° to +60° C |
| Operating Temperature: | -30° to +55° C |
| Weight Typical: | 6.0g |
| Options: | Please contact factory. |


Dimensions:

Inches (mm)



cUL Recognized

ROHS Compliant

PATENT NUMBER: 7880593

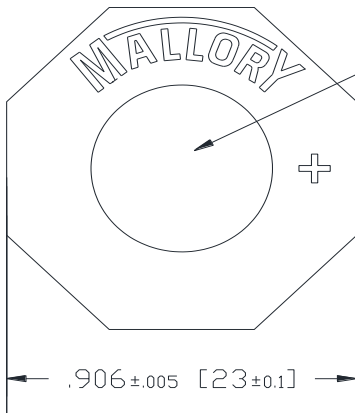

EMISSION HOLE

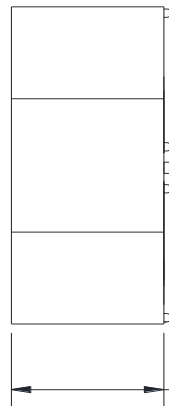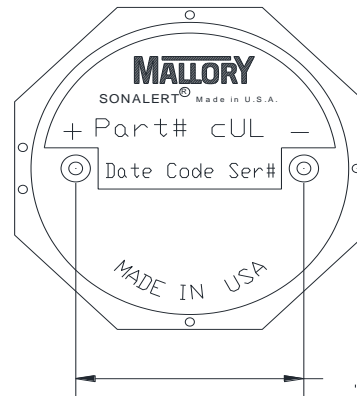

NOTE A:

TERMINALS - .031" DIA. NICKEL/TIN COATED BRASS.

NOTE B:

MOUNTING- INSERT INTO PRINTED CIRCUIT BOARD AND HAND OR MACHINE SOLDER. UNITS ARE SUITABLE FOR WAVE SOLDERING. BOARDS ARE NOT SUITABLE FOR WASH. RECOMMENDED MAXIMUM TEMPERATURE AND TIME DURATION FOR WAVE SOLDERING IS +270°C AND 3 SECONDS RESPECTIVELY.

*Ipk = Instantaneous Peak