


REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
N/C	INITIAL RELEASE, ECN NO. T-4127	4-2-82	H/A

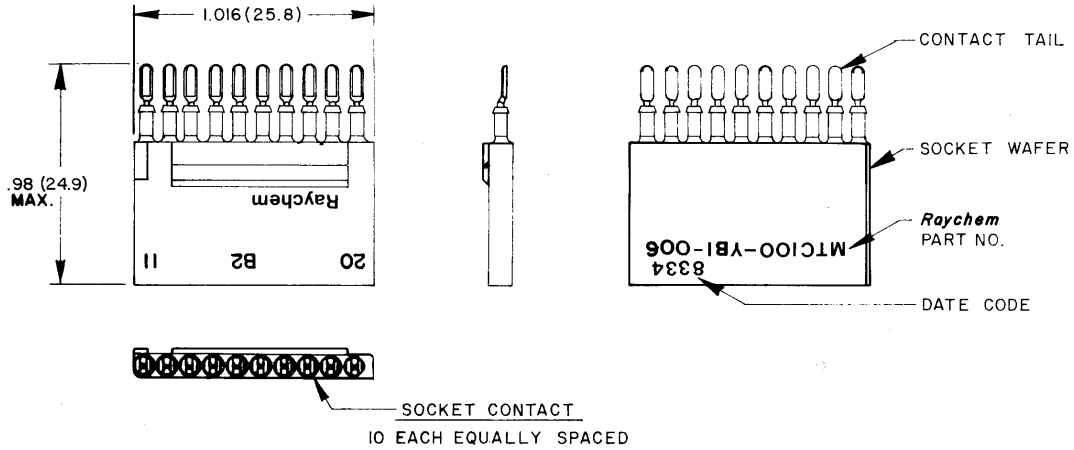

- NOTES:**
- MATERIAL:** I-A SOCKET WAFER; INSERT MATERIAL HIGH GRADE POLYARYLENE THERMOPLASTIC
I-B SOCKET CONTACT; COPPER ALLOY PER QQ-B-750 Sn63
 - FINISH:** 2-A SOCKET WAFER; FINISH TO BE AS MOLDED
2-B SOCKET CONTACT ENGAGING AREA; GOLD PLATE PER MIL-G-45204, CLASS I
2-C CONTACT TAIL; SOLDER COATED PER QQ-S-571
 - WAFER:** WAFER DESIGNED FOR USE WITH CONNECTORS DESIGNED TO *Raychem* SPECIFICATION D-6012
 - WEIGHT (MAX);** LBS. | GRAMS
.0044 | 2.02

© Raychem Corporation 1982

SPECIFICATION CONTROL DRAWING

ITEM	QTY	PART NO.	DWG OR SPEC. NO.	PARTS LIST		DESCRIPTION
				THIRD ANGLE PROJECTION	MATERIAL	DRAWN <i>Hawkins</i> DATE
					FINISH	CHECKED <i>JS</i> DATE
						APPROVED <i>Blain</i> DATE <i>8-9-82</i>
						APPROVED <i>H/A</i> DATE <i>4-2-82</i>
						Raychem RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025
						TITLE WAFER "B2" SOCKET, SPECIAL 1" FOR USE IN MTC100 2" CONNECTOR, 125°C OPERATING TEMP. FOR 20-26 AWG ROUND WIRE TERMINATION MTC100 SERIES
						B FSCM NO. 06090 DWG NO. MTC100-YBI-006
						SCALE NONE DO NOT SCALE THIS DWG SHEET OF

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

THIS DRAWING AND THE INFORMATION SET FORTH HEREON ARE THE PROPERTY OF RAYCHEM CORPORATION AND ARE TO BE HELD IN TRUST AND CONFIDENCE. PUBLICATION, DUPLICATION, DISCLOSURE, OR USE FOR ANY PURPOSE NOT EXPRESSLY AUTHORIZED IN WRITING BY RAYCHEM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE

DEC XX ±.02
DEC XXX ±.005
ANGLES ±
MM ±