

Our VPP (Standard WECO), MVP (Mini WECO) and MMVP (Micro) Video Patchbays are used to patch high definition video in the world's largest broadcast facilities and mobile production units. All of our video patchbay products meet or exceed SMPTE ST 424:2006 specifications. The new MMVP Micro Video Patchbay offers the highest level of density - 96 patchpoints in 1RU!

We also offer a broad line of accessory products for all of our patchbays, including patchcords, insertion/withdrawal tools, terminating/looping plugs, adapters, color coded channel identification chips, cable mount BNC and DIN 1.0/2.3 connectors.

THE LATEST IN HD TECHNOLOGY

HIGH-DEFINITION VIDEO PATCHBAYS



VIDEO PATCHBAYS

Today's high definition broadcast facilities and mobile production units require the most technologically advanced equipment to ensure high quality distribution and processing of audio and video signals. With a broad line of patented audio, video and data patching products, Switchcraft® has been an integral part of this process for decades.

Founded in 1946, Switchcraft® is widely recognized as the world's leading manufacturer of professional audio and video interconnect products. Our team of designers, engineers, sales, marketing and manufacturing professionals work together in our 190,000 square foot facility to ensure the highest quality standards are met in every product we build. **Unlike other manufacturers, our finished products and nearly all of the components they consist of are designed, produced, assembled and tested in one facility (our Chicago, IL world headquarters). This gives us the ability to control every aspect of the design, manufacturing and assembly process from start to finish.**



**Switchcraft®
Pro Audio**


WORLD HEADQUARTERS &
MANUFACTURING FACILITY
5555 N Elston
Chicago, IL 60630
P: 773-792-2700
F: 773-792-2129

INTERNATIONAL
SALES OFFICE
16, Challenge Enterprise Centre, Sharps Close,
Portsmouth, United Kingdom PO3 5RJ
P: +44 (0) 23 9269 1506
F: +44 (0) 23 9269 1505

SWITCHCRAFT.COM



**Switchcraft®
Pro Audio**

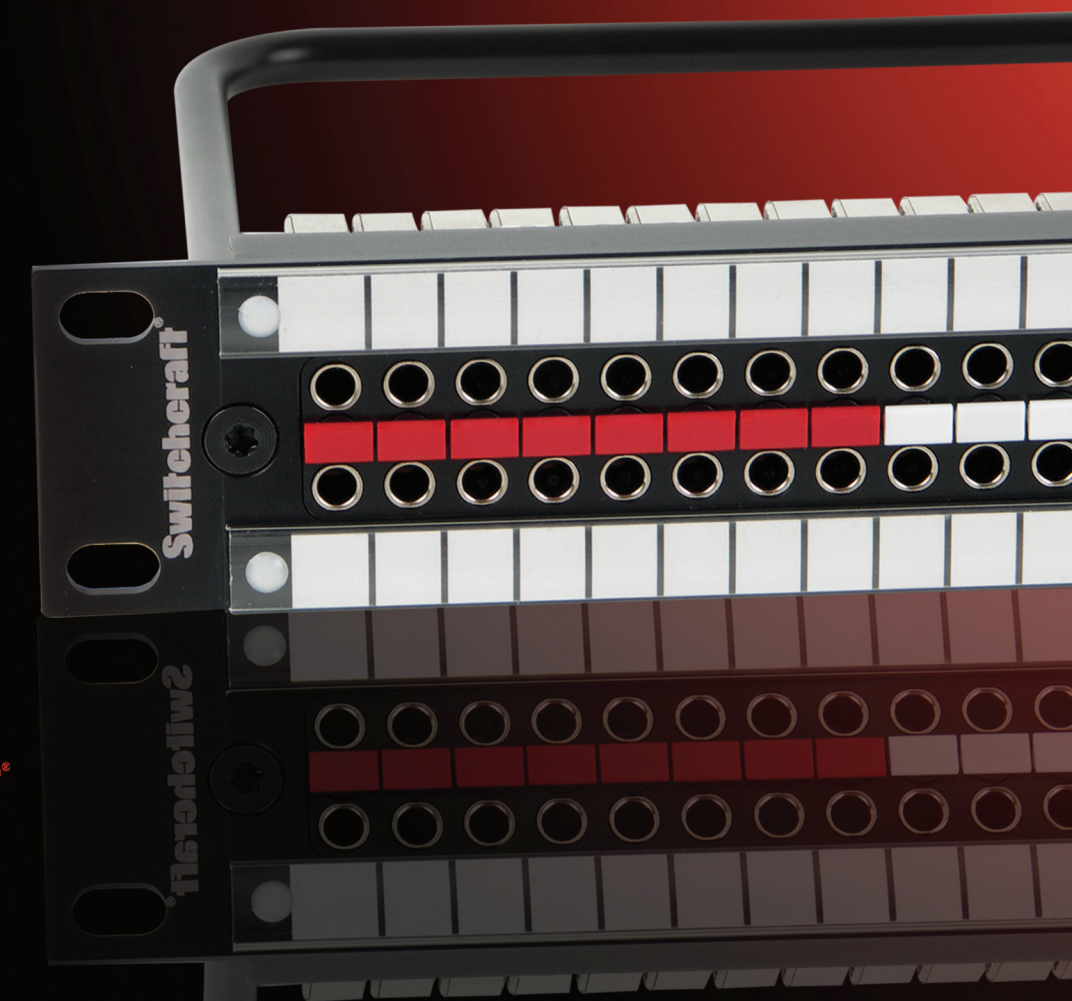



MMVP SERIES VIDEO PATCHBAYS

High density (2x48) high definition video patchbays for video and AES digital audio patching in broadcast, mobile production, post production, etc.

FEATURES & BENEFITS

- Meet SMPTE ST 424:2006
- Rated to 3GHz
- Industry standard DIN 1.0/2.3 input/output connections
- Screw in, all metal jack design withstands vibration in mobile applications
- Based on proven, patented design of our MVJ Series of video jacks
- Cable tie bar for easy cable management
- Snap in designation strips
- Rated to 20,000 insertion/withdrawal cycles

OPTIONS

- 1RU, 1.5RU and 2RU rack heights (1RU height for AES Digital Audio version)
- Normalled, non-normalled, terminated and non-terminated
- Color coding system for easy channel identification
- Available with red frame to distinguish AES/EBU digital audio from HD video
- Accessories include DIN 1.0/2.3 insertion/withdrawal tool, looping plugs, channel identification chips and DIN 1.0/2.3 cable mount connector

Number of Jacks	Rack Height	Normalling	75Ω Termination	Part Number
2x48	1RU	Normalled	Terminated	MMVP48K175T
		Non-Normalled	Non-Terminated	MMVP48K1NT
		Non-Normalled	Terminated	MMVP48K1N75T
	1.5RU	Normalled	Terminated	MMVP48K1NNT
		Non-Normalled	Terminated	MMVP48K275T
		Non-Normalled	Non-Terminated	MMVP48K2NT
4x48	2RU	Normalled	Terminated	MMVP48K2N75T
		Non-Normalled	Non-Terminated	MMVP48K2NNT
		Non-Normalled	Terminated	MMVP48K375T
	1.5RU	Normalled	Terminated	MMVP48K3NT
		Non-Normalled	Terminated	MMVP48K3N75T
		Non-Normalled	Non-Terminated	MMVP48K3NNT
2RU	1.5RU	Normalled	Terminated	MMVP96K275T
		Non-Normalled	Non-Terminated	MMVP96K2NT
		Non-Normalled	Terminated	MMVP96K2N75T
	2RU	Normalled	Terminated	MMVP96K2NNT
		Non-Normalled	Terminated	MMVP96K375T
		Non-Normalled	Non-Terminated	MMVP96K3NT
2RU	1.5RU	Normalled	Terminated	MMVP96K3N75T
		Non-Normalled	Terminated	MMVP96K3NNT
		Non-Normalled	Non-Terminated	MMVP96K3NT
	2RU	Normalled	Terminated	MMVP96K3N75T
		Non-Normalled	Terminated	MMVP96K3NNT
		Non-Normalled	Non-Terminated	MMVP96K3NT

Number of Jacks	Rack Height	Normalling	75Ω Termination	Part Number
2x48	1RU	Normalled	Terminated	MMVP48K175TAES
			Non-Terminated	MMVP48K1NTAES
		Non-Normalled	Terminated	MMVP48K1N75TAES
			Non-Terminated	MMVP48K1NNTAES



MVP SERIES VIDEO PATCHBAYS

Mid-size WECO (2x32 or 2x34) High Definition Video Patchbays

FEATURES & BENEFITS


- Meet SMPTE ST 424:2006
- Rated to 3GHz
- Industry standard 75 Ohm BNC input/output connections
- Screw in, all metal jack design withstands vibration in mobile applications
- Proven, patented design (MVJ mid-size video jack)
- Cable tie bar for easy cable management
- Snap in designation strips
- Rated to 30,000 insertion/withdrawal cycles

OPTIONS

- 1RU, 1.5RU and 2RU rack heights
- Normalled, non-normalled, terminated and non-terminated
- Accessories include true 75 Ohm cable mount BNC connectors
- Single video jacks, looping plugs, patch plugs and BNC to patch adapters also available

* See accessories page for more details

Number of Jacks	Rack Height	Normalling	75Ω Termination	Part Number	
2x32	1RU	Normalled	Terminated	MVP32K175T	
			Non-Terminated	MVP32K1NT	
		Non-Normalled	Terminated	MVP32K1N75T	
			Non-Terminated	MVP32K1NNT	
		1.5RU	Normalled	Terminated	MVP32K275T
			Non-Normalled	Non-Terminated	MVP32K2NT
	2RU	Normalled	Terminated	MVP32K2N75T	
			Non-Terminated	MVP32K2NNT	
		Non-Normalled	Terminated	MVP32K375T	
			Non-Terminated	MVP32K3NT	
		1RU	Normalled	Terminated	MVP32K3N75T
			Non-Normalled	Non-Terminated	MVP32K3NNT
2x34	1RU	Normalled	Terminated	MVP34K175T	
		Non-Normalled	Non-Terminated	MVP34K1NT	
		Non-Normalled	Terminated	MVP34K1N75T	
	1.5RU	Normalled	Terminated	MVP34K1NNT	
		Non-Normalled	Terminated	MVP34K275T	
		Non-Normalled	Non-Terminated	MVP34K2NT	
2RU	Normalled	Terminated	MVP34K2N75T		
	Non-Normalled	Non-Terminated	MVP34K2NNT		
	Non-Normalled	Terminated	MVP34K375T		
2RU	1.5RU	Normalled	Terminated	MVP34K3NT	
		Non-Normalled	Non-Terminated	MVP34K3N75T	
	2RU	Non-Normalled	Terminated	MVP34K3NNT	

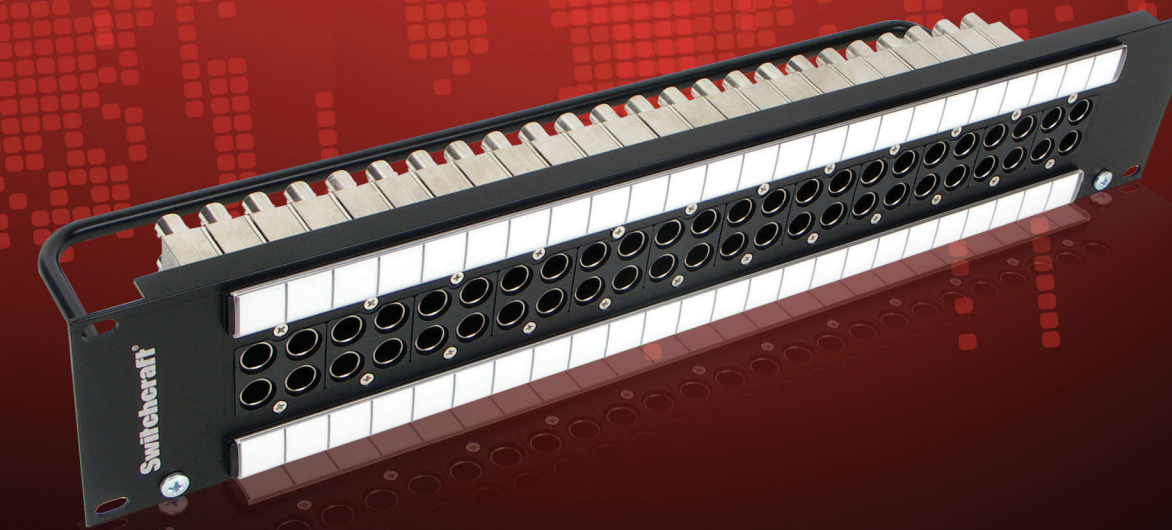

VPP SERIES VIDEO PATCHBAYS

Standard WECO (2x24 or 2x26) High Definition Video Patchbays

FEATURES & BENEFITS


- Meet SMPTE ST 424:2006
- Rated to 3GHz
- Industry standard 75 Ohm BNC input/output connections
- Screw in, all metal jack design withstands vibration in mobile applications
- Proven, patented design (MVJ mid-size video jack)
- Cable tie bar for easy cable management
- Snap in designation strips
- Rated to 30,000 insertion/withdrawal cycles

OPTIONS

- 1RU and 2RU rack heights
- Normalled, non-normalled, terminated and non-terminated
- Accessories include true 75 Ohm cable mount BNC connectors
- Single video jacks, looping plugs and BNC to patch adapters also available

* See accessories page for more details

Number of Jacks	Rack Height	Normalling	75Ω Termination	Part Number
2X24	1RU	Normalled	Terminated	VPP24K1HD75T
			Non-Terminated	VPP24K1HDNT
		Non-Normalled	Terminated	VPP24K1HDN75T
	Non-Terminated		VPP24K1HDNNT	
	2RU	Normalled	Terminated	VPP24K3HD75T
		Non-Normalled	Non-Terminated	VPP24K3HDNT
Non-Normalled		Terminated	VPP24K3HDN75T	
2X26	1RU	Normalled	Terminated	VPP24K3HDNNT
			Non-Terminated	VPP26K1HD75T
		Non-Normalled	Terminated	VPP26K1HDNT
	Non-Terminated		VPP26K1HDN75T	
	2RU	Normalled	Terminated	VPP26K1HDNNT
		Non-Normalled	Terminated	VPP26K3HD75T
Non-Normalled		Non-Terminated	VPP26K3HDNT	
2RU	1.5RU	Normalled	Terminated	VPP26K3HDN75T
		Non-Normalled	Non-Terminated	VPP26K3HDNNT
	2RU	Non-Normalled	Terminated	VPP26K3HDNNT

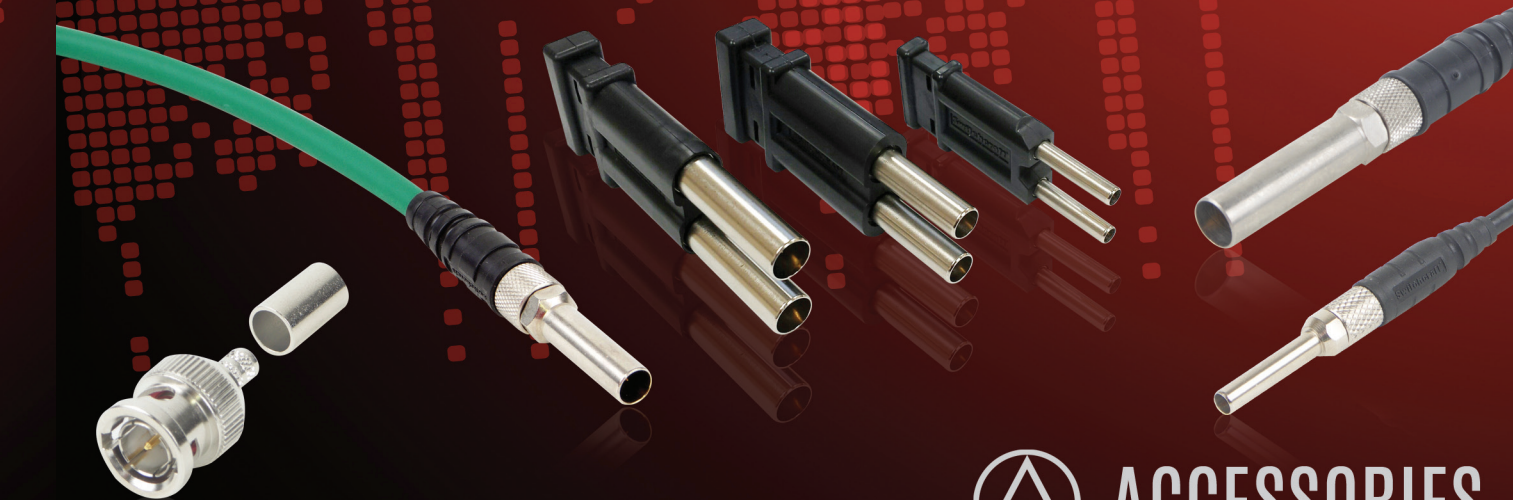

VIDEO PATCHCORD PART NUMBERING SYSTEM

Prefix
VMMP=Micro Video Patchcord

VMP=Mid-size Video Patchcord

VP=Standard size Video Patchcord

Length in Feet
1-10

Color
BK=Black
R=Red
O=Orange
GN=Green
BL=Blue
GY=Gray
Y=Yellow

Example
VMMP2BK
(Micro Video Patchcord, 2ft., Black)

Patchbay Type	Accessory	Part Number
VPP (Standard)	Standard WECO Patch Plug to BNC Adapter	VPBNCF
	Standard WECO Looping Plug	VSLP
	Standard WECO Looping Plug (75 Ohm Terminated)	VSLP75T
MVP (Mini)	Mini WECO Looping Plug	VMLP
	Mini WECO Looping Plug (75 Ohm Terminated)	VMLP75T
	Mini WECO Patch Plug	VMPP
	Mini WECO Patch Plug to BNC Adapter	VMPBNCF
MMVP (Micro)	Micro Video Looping Plug (NEW)	VMMLP
	DIN 1.0/2.3 Insertion/Withdrawal Tool	MMVPTL
	60MMVP Color Chips, 10 of each	K600
	50MMVP Color Chips, Red	K6002D
	50MMVP Color Chips, Orange	K6003B
	50MMVP Color Chips, Yellow	K6004B
50MMVP Color Chips, Green	K6005N	
50MMVP Color Chips, Blue	K6006L	
50MMVP Color Chips, White	K6009B	

DIN 1.0/2.3	Most Common Compatible Cabling
DIN1855A	Belden 1855A, Gepco VDM230
DIN1855ENH	Belden 1855ENH cable
DIN179DT	Belden 179DT cable
DIN1505A	Belden 1505A, Gepco VPM2000, Gepco VHD2000M
DIN1694	Belden 1694A, Gepco VSD2001, Gepco VHD2001M
True 75 OHM BNC	Most Common Compatible Cabling
HP75BNC12X	Belden #1855A, Gepco VDM230
HP75BNC1X	Belden #8241
HP75BNC2X	Belden #8281B
HP75BNC6X	Belden #1695A, Gepco VSD2001TS
HP75BNC7X	Belden #1694A, Gepco VSD2001, Draka 1.0/4.8AF
HP75BNC9X	Belden #1505A, Gepco VPM200, Draka 0.8/3.7AF, Draka 0.8/3.7DZ

ACCESSORIES