

Triple-Balanced Mixer

Rev. V2


Features

- LO 0.5 TO 19 GHz
- RF 0.5 TO 19 GHz
- IF 0.03 TO 5 GHz
- LO DRIVE +13 dBm (nominal)
- VERY WIDE BANDWIDTH

Description

MY87 is a triple balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric baluns to attain excellent performance. The use of high temperature solder assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202 or MIL-DTL-28837, consult factory.

Product Image

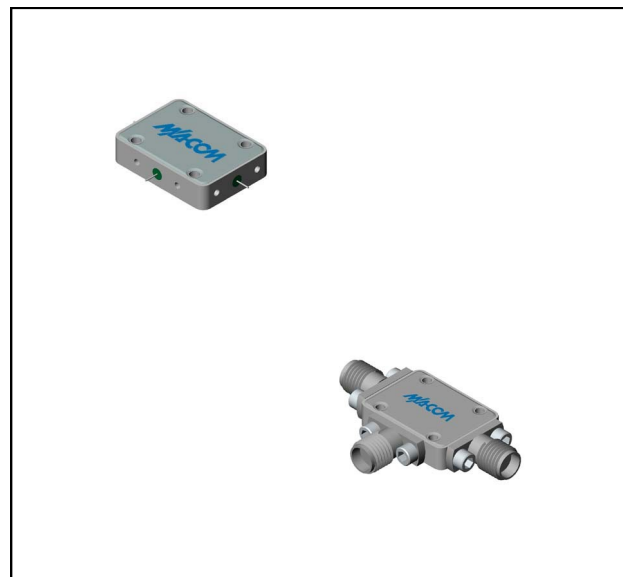

Ordering Information

| Part Number | Package |
|-------------|-------------------|
| MY87 | Versapac |
| MY87C | SMA Connectorized |

Electrical Specifications: $Z_0 = 50\Omega$ $Lo = +13$ dBm (Downconverter Application only)


| Parameter | Test Conditions | Units | Typical | Guaranteed | |
|----------------------------------------------------|---------------------------------------------------------------------------------|-------|---------|------------|---------------|
| | | | | +25°C | -54° to +85°C |
| SSB Conversion Loss (max) & SSB Noise Figure (max) | $fR = 1$ to 18 GHz, $fL = 0.5$ to 18 GHz, $fI = 0.03$ to 3 GHz | dB | 7.5 | 10.5 | 11.0 |
| | $fR = 0.5$ to 18 GHz, $fL = 0.5$ to 18 GHz, $fI = 0.03$ to 4 GHz | dB | 8.5 | 11.0 | 11.5 |
| | $fR = 0.7$ to 19 GHz, $fL = 3$ to 19 GHz, $fI = 0.03$ to 5 GHz | dB | 10.5 | 12.0 | 12.5 |
| Isolation, L to R (min) | $fL = 0.5$ to 3 GHz | dB | 17 | 10 | 8 |
| | $fL = 3$ to 19 GHz | dB | 30 | 20 | 18 |
| Isolation, L to I (min) | $fL = 0.5$ to 5 GHz | dB | 32 | 22 | 20 |
| 1 dB Conversion Comp. | $fL = +13$ dBm | dBm | +8 | | |
| Input IP3 | $fR1 = 5$ GHz at -6 dBm, $fR2 = 6.01$ GHz at -6 dBm, $fL = 7$ GHz at +13 dBm | dBm | +16.5 | | |
| | $fR1 = 15$ GHz at -6 dBm, $fR2 = 15.01$ GHz at -6 dBm, $fL = 18$ GHz at +13 dBm | dBm | +18 | | |

Triple-Balanced Mixer


Rev. V2

Typical Performance Curves


Conversion Loss vs. LO Drive Power

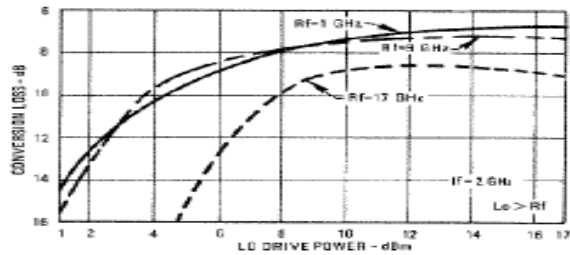




R-Port VSWR vs. Frequency

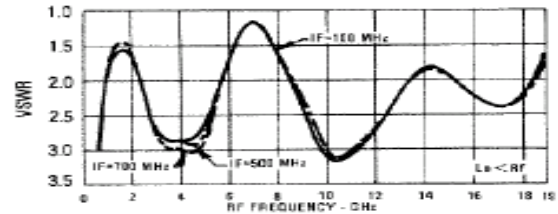



Conversion Loss vs. Frequency LO @ +13 dBm

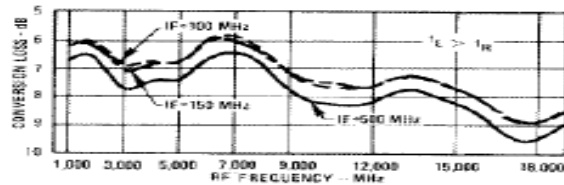

R-Port VSWR vs. Frequency

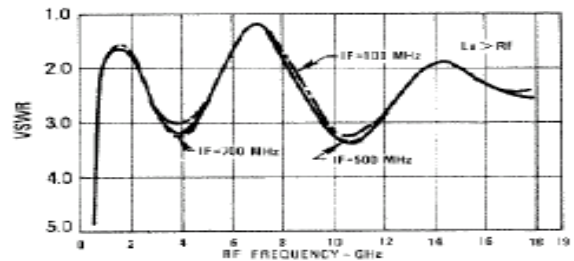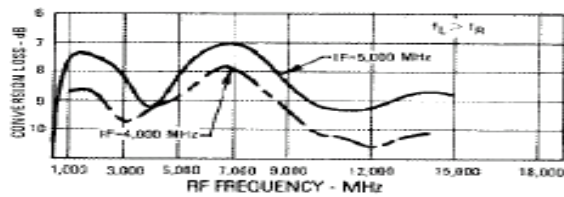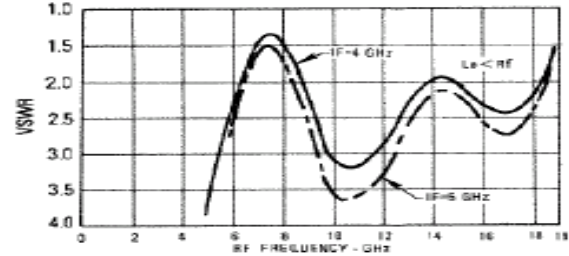

Isolation vs. Frequency

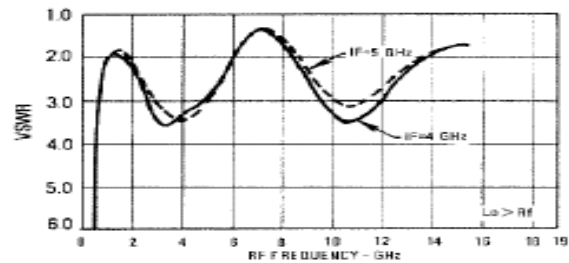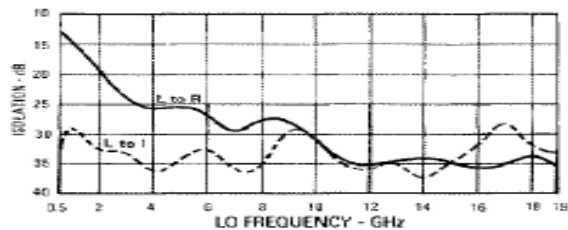


Triple-Balanced Mixer

Rev. V2


Absolute Maximum Ratings

| Parameter | Absolute Maximum |
|-----------------------|---------------------------------------------|
| Operating Temperature | -54°C to +100°C |
| Storage Temperature | -65°C to +100°C |
| Peak Input Power | +26 dBm max @ +25°C +23 dBm max @ +100°C |
| Peak Input Current | 100 mA DC |

Outline Drawing: Versapac *

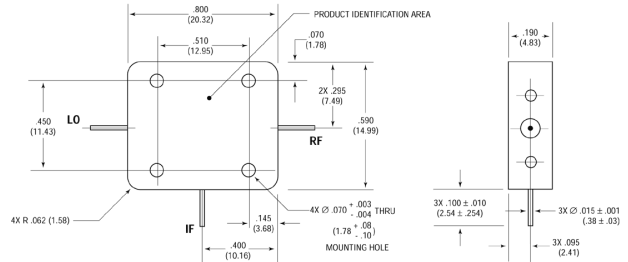


Weight: 6 grams (0.21 oz.) max

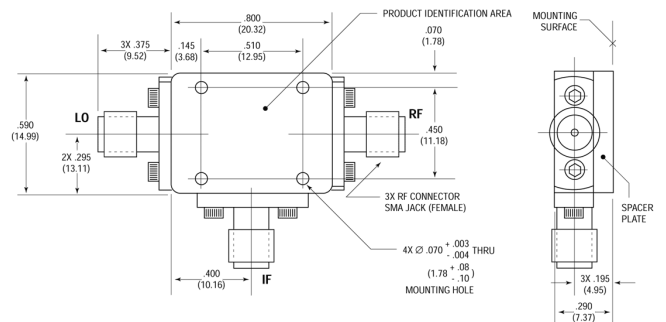


Weight: 12 grams (0.42 oz.) max



L-PORT VSWR vs. Frequency

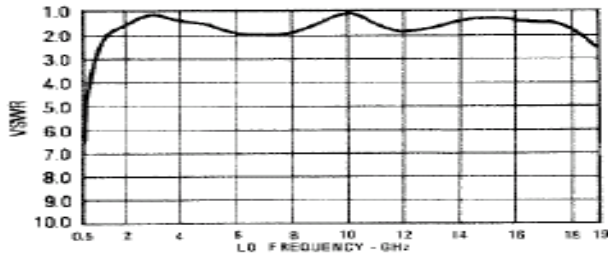

I-Port VSWR vs. Frequency

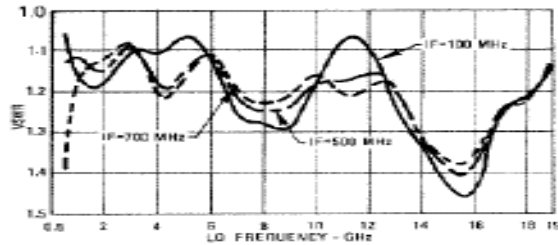

I-Port VSWR vs. Frequency

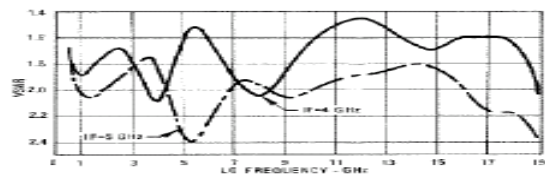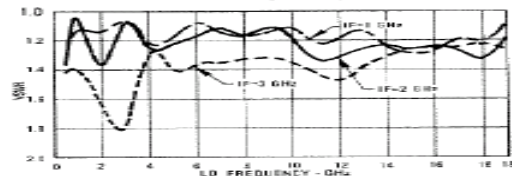

* Dimensions are inches (millimeters) ± 0.015 (0.38) unless otherwise specified.