

TinyLogic UHS 1-of-2 Non-Inverting De-multiplexer with 3-STATE Deselected Output

NC7SZ18

Description

The NC7SZ18 is a 1-of-2 non-inverting demultiplexer. The device will buffer the data on the A pin and pass to either output Y₀ or Y₁ dependent on whether state of the select pin (S) is LOW or HIGH respectively. The deselected output will be placed into a high impedance state. The device is fabricated with advanced CMOS technology to achieve ultra high speed with high output drive while maintaining low static power dissipation over a broad V_{CC} operating range. The device is specified to operate over the 1.65 V to 5.5 V V_{CC} operating range. The inputs and outputs are high impedance when V_{CC} is 0 V. Inputs tolerate voltages up to 5.5 V independent of V_{CC} operating range.

Features

- Ultra High-Speed: t_{PD} = 2.5 ns Typical at 5 V V_{CC}
- High Impedance Output when Deselected
- Broad V_{CC} Operating Range: 1.65 V to 5.50 V
- Power Down High Impedance Inputs / Outputs
- Over-Voltage Tolerance Inputs Facilitate 5 V to 3 V Translation
- Proprietary Noise / EMI Reduction Circuitry
- Ultra-Small MicroPak™ Packages
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

MARKING DIAGRAMS



SIP6 1.45x1.0
CASE 127EB

Pin 1




UDFN6
1.0X1.0, 0.35P
CASE 517DP

Pin 1



SC-88
CASE 419B-02



| | |
|---------|-------------------------------------|
| D5, Z18 | = Specific Device Code |
| KK | = 2-Digit Lot Run Traceability Code |
| XY | = 2-Digit Date Code Format |
| Z | = Assembly Plant Code |
| M | = Date Code |
| - | = Pb-Free Package |

(Note: Microdot may be in either location)

ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 6 of this data sheet.

NC7SZ18

Pin Configurations

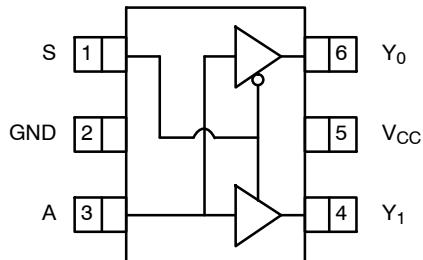


Figure 1. SC-88 (Top View)


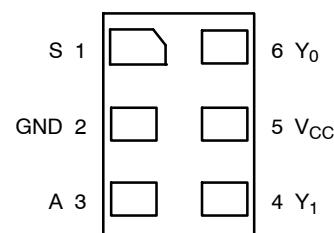


Figure 2. MicroPak (Top Through View)

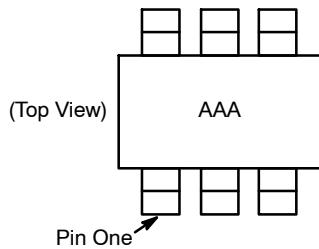

NOTES:

1. AAA represents product code top mark (see [Ordering Information](#)).
2. Orientation of top mark determines pin one location.
3. Reading the top mark left to right, pin one is the lower left pin.

Figure 3. Pin 1 Orientation

PIN DEFINITIONS

| Pin # SC-88 | Pin # MicroPak | Name | Description |
|-------------|----------------|-----------------|--------------------|
| 1 | 1 | S | Data Input |
| 2 | 2 | GND | Ground |
| 3 | 3 | A | Demultiplexer Data |
| 4 | 4 | Y ₁ | Output |
| 5 | 5 | V _{CC} | Supply Voltage |
| 6 | 6 | Y ₀ | Output |

FUNCTION TABLE

| Inputs | | Output | |
|--------|---|----------------|----------------|
| S | A | Y ₀ | Y ₁ |
| L | L | L | Z |
| L | H | H | Z |
| H | L | Z | L |
| H | H | Z | H |

H = HIGH Logic Level
 L = LOW Logic Level
 X = 3-STATE

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | | Min | Max | Unit |
|-------------------------------------|---|------------------------|------|------|------|
| V _{CC} | Supply Voltage | | -0.5 | 6.5 | V |
| V _{IN} | DC Input Voltage | | -0.5 | 6.5 | V |
| V _{OUT} | DC Output Voltage | | -0.5 | 6.5 | V |
| I _{IK} | DC Input Diode Current | V _{IN} < 0 V | - | -50 | mA |
| I _{OK} | DC Output Diode Current | V _{OUT} < 0 V | - | -50 | mA |
| I _{OUT} | DC Output Current | | - | ±50 | mA |
| I _{CC} or I _{GND} | DC V _{CC} or Ground Current | | - | ±100 | mA |
| T _{STG} | Storage Temperature Range | | -65 | +150 | °C |
| T _J | Junction Temperature Under Bias | | - | +150 | °C |
| T _L | Junction Lead Temperature (Soldering, 10 Seconds) | | - | +260 | °C |
| P _D | Power Dissipation at +85°C | SC-88 | - | 332 | mW |
| | | MicroPak-6 | - | 812 | |
| | | MicroPak2™-6 | - | 812 | |
| ESD | Human Body Model, JEDEC: JESD22-A114 | | - | 2000 | V |
| | Charge Device Model, JEDEC: JESD22-C101 | | - | 1000 | |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

RECOMMENDED OPERATING CONDITIONS

| Symbol | Parameter | Conditions | Min | Max | Unit |
|---------------------------------|-------------------------------|--|------|-----------------|------|
| V _{CC} | Supply Voltage Operating | | 1.65 | 5.5 | V |
| | Supply Voltage Data Retention | | 1.5 | 5.5 | |
| V _{IN} | Input Voltage | | 0 | 5.5 | V |
| V _{OUT} | Output Voltage | | 0 | V _{CC} | V |
| t _r , t _f | Input Rise and Fall Times | V _{CC} at 1.8 V ±0.15 V, 2.5 V ±0.2 V | 0 | 20 | ns/V |
| | | V _{CC} at 3.3 V ±0.3 V | 0 | 10 | |
| | | V _{CC} at 5.0 V ±0.5 V | 0 | 5 | |
| T _A | Operating Temperature | | -40 | +85 | °C |
| θ _{JA} | Thermal Resistance | SC-88 | - | 377 | °C/W |
| | | MicroPak-6 | - | 154 | |
| | | MicroPak2-6 | - | 154 | |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

NC7SZ18

DC ELECTRICAL CHARACTERISTICS

| Symbol | Parameter | V _{CC} (V) | Conditions | T _A = +25°C | | | T _A = -40 to +85°C | | Unit |
|------------------|---------------------------|---------------------|--|------------------------|------|----------------------|-------------------------------|----------------------|------|
| | | | | Min | Typ | Max | Min | Max | |
| V _{IH} | HIGH Level Input Voltage | 1.65 to 1.95 | | 0.65 V _{CC} | — | — | 0.75 V _{CC} | — | V |
| | | 2.30 to 5.50 | | 0.70 V _{CC} | — | — | 0.70 V _{CC} | — | |
| V _{IL} | LOW Level Input Voltage | 1.65 to 1.95 | | — | — | 0.25 V _{CC} | — | 0.25 V _{CC} | V |
| | | 2.30 to 5.50 | | — | — | 0.30 V _{CC} | — | 0.30 V _{CC} | |
| V _{OH} | HIGH Level Output Voltage | 1.65 | V _{IN} = V _{IH} or V _{IL} , I _{OH} = -100 μA | 1.55 | 1.65 | — | 1.55 | — | V |
| | | 2.30 | | 2.20 | 2.30 | — | 2.20 | — | |
| | | 3.00 | | 2.90 | 3.00 | — | 2.90 | — | |
| | | 4.50 | | 4.40 | 4.50 | — | 4.40 | — | |
| | | 1.65 | I _{OH} = -4 mA | 1.29 | 1.52 | — | 1.29 | — | |
| | | 2.30 | I _{OH} = -8 mA | 1.90 | 2.15 | — | 1.90 | — | |
| | | 3.00 | I _{OH} = -16 mA | 2.40 | 2.80 | — | 2.40 | — | |
| | | 3.00 | I _{OH} = -24 mA | 2.30 | 3.68 | — | 2.30 | — | |
| | | 4.50 | I _{OH} = -32 mA | 3.80 | 4.20 | — | 3.80 | — | |
| | | 1.65 | V _{IN} = V _{IH} or V _{IL} , I _{OL} = 100 μA | — | 0.00 | 0.10 | — | 0.10 | V |
| V _{OL} | LOW Level Output Voltage | 2.30 | | — | 0.00 | 0.10 | — | 0.10 | |
| | | 3.00 | | — | 0.00 | 0.10 | — | 0.10 | |
| | | 4.50 | | — | 0.00 | 0.10 | — | 0.10 | |
| | | 1.65 | I _{OL} = 4 mA | — | 0.08 | 0.24 | — | 0.24 | |
| | | 2.30 | I _{OL} = 8 mA | — | 0.10 | 0.30 | — | 0.30 | |
| | | 3.00 | I _{OL} = 16 mA | — | 0.15 | 0.40 | — | 0.40 | |
| | | 3.00 | I _{OL} = 24 mA | — | 0.22 | 0.55 | — | 0.55 | |
| | | 4.50 | I _{OL} = 32 mA | — | 0.22 | 0.55 | — | 0.55 | |
| I _{IN} | Input Leakage Current | 1.65 to 5.5 | V _{IN} = 5.5 V, GND | — | — | ±0.1 | — | ±1.0 | μA |
| I _{OZ} | 3-STATE Output Leakage | 1.65 to 5.5 | V _{IN} = V _{IH} or V _{IL} , 0 < V _{OUT} ≤ 5.5 V | — | — | ±0.5 | — | ±5.0 | μA |
| I _{OFF} | Power Off Leakage Current | 0 | V _{IN} or V _{OUT} = 5.5 V | — | — | 1 | — | 10 | μA |
| I _{CC} | Quiescent Supply Current | 1.65 to 5.5 | V _{IN} = 5.5 V, GND | — | — | 1 | — | 10 | μA |


AC ELECTRICAL CHARACTERISTICS

| Symbol | Parameter | V _{CC} (V) | Conditions | T _A = +25°C | | T _A = -40 to +85°C | | Unit | |
|-------------------------------------|--|---------------------|--|------------------------|------|-------------------------------|-----|------|----|
| | | | | Min | Typ | Max | Min | | |
| t _{PLH} , t _{PHL} | Propagation Delay A to (Y ₀ or Y ₁) (Figure 4, 6) | 1.80 ±0.15 | C _L = 15 pF, R _D = 1 MΩ, V ₁ = OPEN | – | 6.3 | 10.1 | – | 10.5 | ns |
| | | 2.50 ±0.20 | | – | 3.6 | 5.7 | – | 6.0 | |
| | | 3.30 ±0.30 | | – | 2.7 | 4.0 | – | 4.3 | |
| | | 5.00 ±0.50 | | – | 2.0 | 3.1 | – | 3.3 | |
| | | 3.30 ±0.30 | C _L = 50 pF, R _D = 500 Ω, V ₁ = OPEN | – | 3.4 | 4.9 | – | 5.4 | ns |
| | | 5.00 ±0.50 | | – | 2.5 | 3.9 | – | 4.2 | |
| t _{PZL} , t _{PHZ} | Output Enable Time (Figure 4, 6) | 1.80 ±0.15 | C _L = 50 pF, R _D , R _U = 500 Ω, V ₁ = GND for t _{PZL} V ₁ = V _{IN} for t _{PHZ} V _{IN} = 2 × V _{CC} | – | 6.9 | 12.0 | – | 12.5 | ns |
| | | 2.50 ±0.20 | | – | 4.2 | 6.8 | – | 7.3 | |
| | | 3.30 ±0.30 | | – | 3.2 | 5.0 | – | 5.5 | |
| | | 5.00 ±0.50 | | – | 2.5 | 4.0 | – | 4.3 | |
| | Output Disable Time (Figure 4, 6) | 1.80 ±0.15 | C _L = 50 pF, R _D , R _U = 500 Ω, V ₁ = GND for t _{PHZ} V ₁ = V _{IN} for t _{PLZ} V _{IN} = 2 × V _{CC} | – | 6.0 | 10.0 | – | 10.5 | ns |
| | | 2.50 ±0.20 | | – | 4.0 | 6.8 | – | 7.1 | |
| | | 3.30 ±0.30 | | – | 2.9 | 4.9 | – | 5.3 | |
| | | 5.00 ±0.50 | | – | 1.8 | 3.5 | – | 3.7 | |
| C _{IN} | Input Capacitance | 0 | | – | 2.5 | – | – | – | pF |
| C _{OUT} | Output Capacitance | 0 | | – | 4.0 | – | – | – | pF |
| C _{PD} | Power Dissipation Capacitance (Note 4) (Figure 5) | 3.30 | | – | 16.0 | – | – | – | pF |
| | | 5.00 | | – | 19.5 | – | – | – | |

4. C_{PD} is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I_{CCD}) at no output loading and operating at 50% duty cycle. C_{PD} is related to I_{CCD} dynamic operating current by the expression:
 $I_{CCD} = (C_{PD}) (V_{CC}) (f_{IN}) + (I_{CCstatic})$.

NC7SZ18

AC Loading and Waveforms

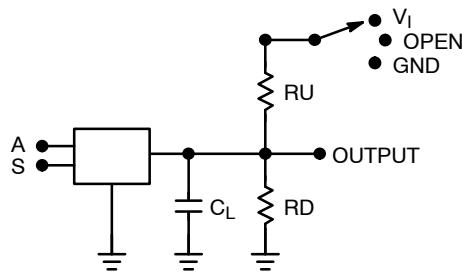

NOTES:

5. C_L includes load and stray capacitance.
6. Input PRR = 1.0 MHz, t_W = 500 ns.

Figure 4. AC Test Circuit

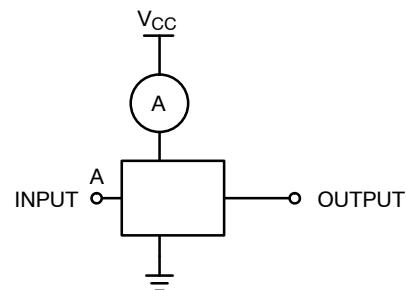


Figure 5. ICCD Test Circuit


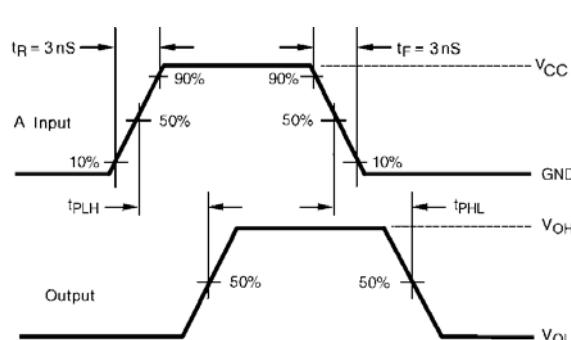


Figure 6. AC Waveforms

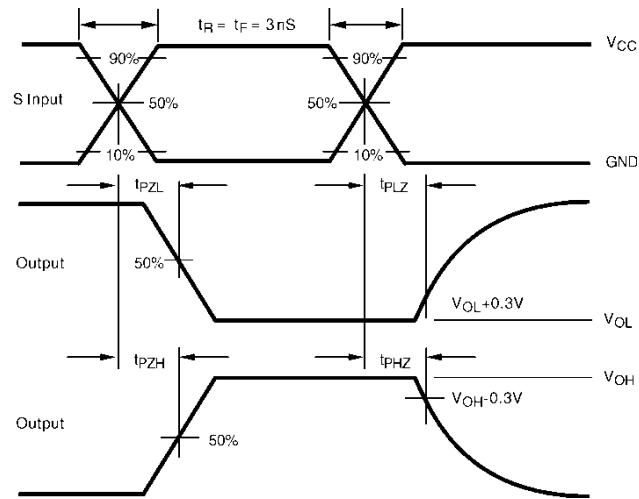

ORDERING INFORMATION

| Device | Top Mark | Packages | Shipping [†] |
|-------------------|----------|------------------|-----------------------|
| NC7SZ18P6X | Z18 | SC-88 | 3000 / Tape & Reel |
| NC7SZ18P6X-L22347 | Z18 | SC-88 | 3000 / Tape & Reel |
| NC7SZ18L6X | D5 | SIP6, MicroPak | 5000 / Tape & Reel |
| NC7SZ18FHX | D5 | UDFN6, MicroPak2 | 5000 / Tape & Reel |

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

MicroPak and MicroPak2 are trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries.

MECHANICAL CASE OUTLINE


PACKAGE DIMENSIONS

ON Semiconductor®



SIP6 1.45X1.0
CASE 127EB
ISSUE O

DATE 31 AUG 2016

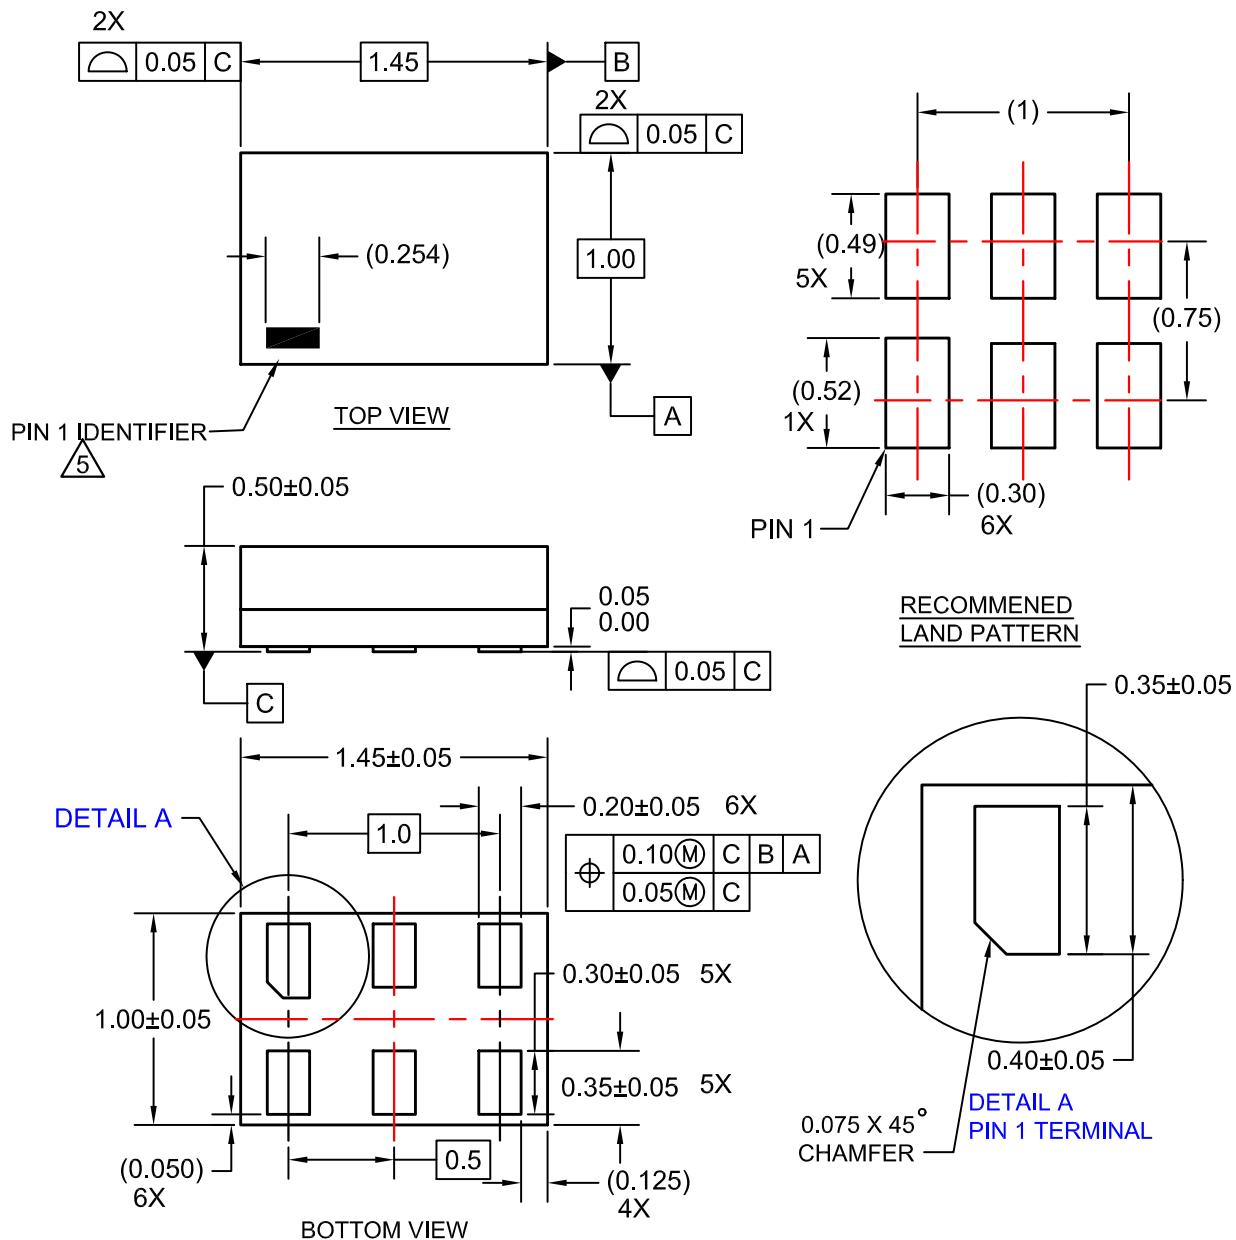

NOTES:


1. CONFORMS TO JEDEC STANDARD MO-252 VARIATION UAAD
2. DIMENSIONS ARE IN MILLIMETERS
3. DRAWING CONFORMS TO ASME Y14.5M-2009
4. PIN ONE IDENTIFIER IS 2X LENGTH OF ANY OTHER LINE IN THE MARK CODE LAYOUT.

| | | |
|------------------|---------------|---|
| DOCUMENT NUMBER: | 98AON13590G | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION: | SIP6 1.45X1.0 | PAGE 1 OF 1 |

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.


SC-88 (SC-70 6 Lead), 1.25x2
CASE 419AD-01
ISSUE A

DATE 07 JUL 2010

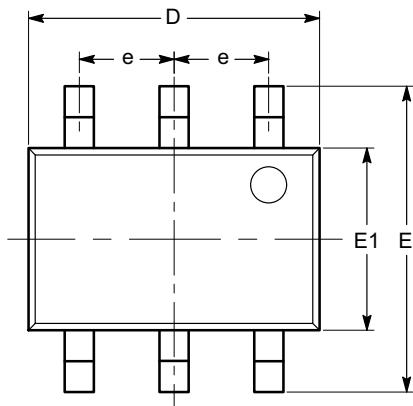


TOP VIEW

| SYMBOL | MIN | NOM | MAX |
|--------|----------|------|------|
| A | 0.80 | | 1.10 |
| A1 | 0.00 | | 0.10 |
| A2 | 0.80 | | 1.00 |
| b | 0.15 | | 0.30 |
| c | 0.10 | | 0.18 |
| D | 1.80 | 2.00 | 2.20 |
| E | 1.80 | 2.10 | 2.40 |
| E1 | 1.15 | 1.25 | 1.35 |
| e | 0.65 BSC | | |
| L | 0.26 | 0.36 | 0.46 |
| L1 | 0.42 REF | | |
| L2 | 0.15 BSC | | |
| θ | 0° | | 8° |
| θ1 | 4° | | 10° |

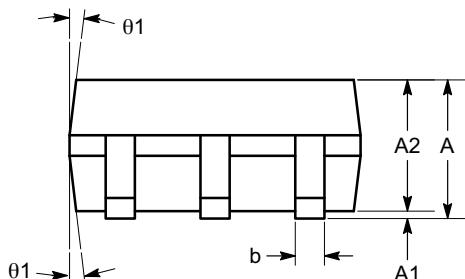

SIDE VIEW

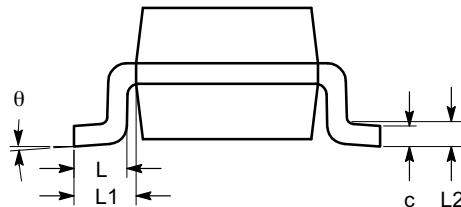

END VIEW

Notes:

- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Complies with JEDEC MO-203.

| | | |
|------------------|------------------------------|---|
| DOCUMENT NUMBER: | 98AON34266E | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION: | SC-88 (SC-70 6 LEAD), 1.25X2 | PAGE 1 OF 1 |

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

MECHANICAL CASE OUTLINE



PACKAGE DIMENSIONS

ON Semiconductor®





UDFN6 1.0X1.0, 0.35P
CASE 517DP
ISSUE O


DATE 31 AUG 2016

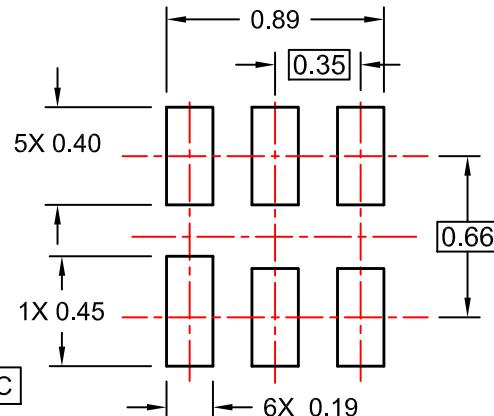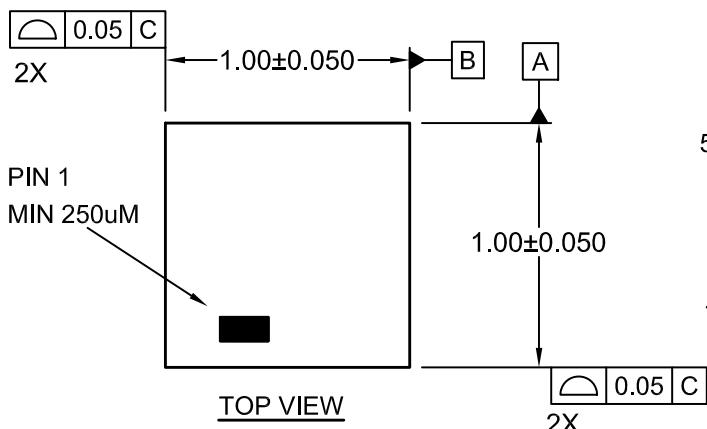

RECOMMENDED LAND PATTERN
FOR SPACE CONSTRAINED PCB

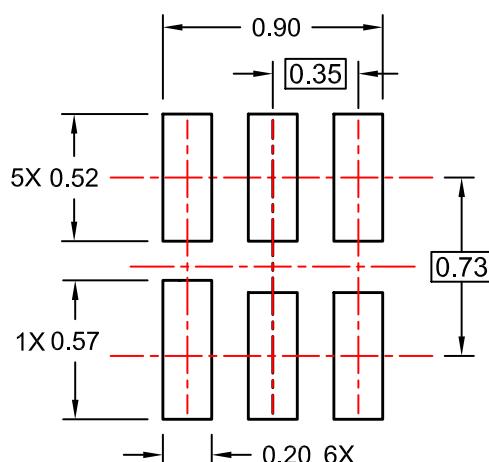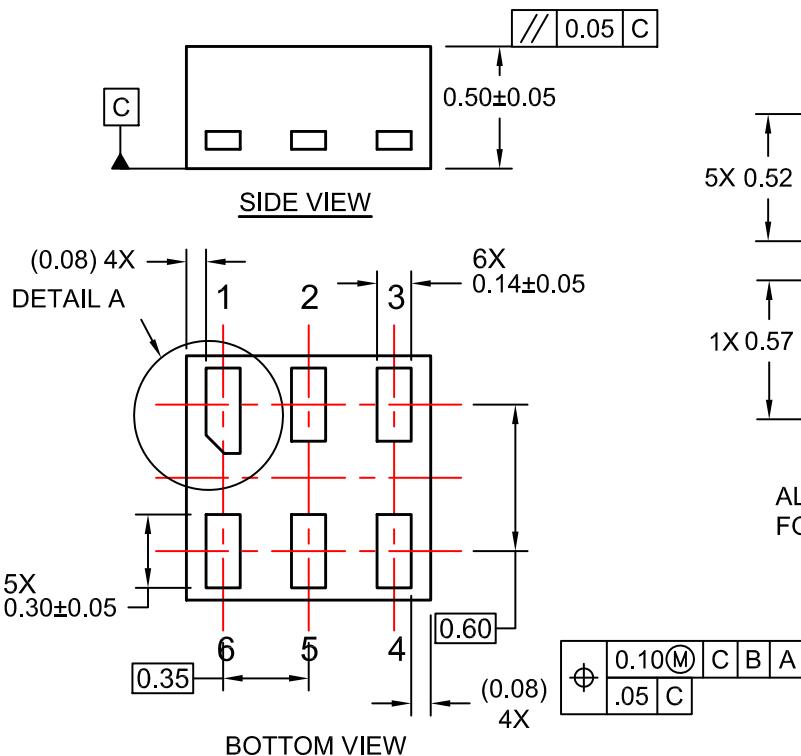

ALTERNATIVE LAND PATTERN
FOR UNIVERSAL APPLICATION

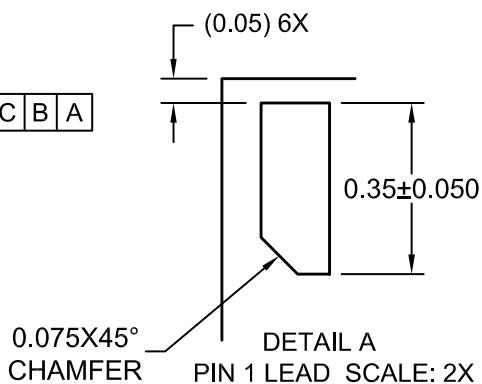

NOTES:

- A. COMPLIES TO JEDEC MO-252 STANDARD
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 2009

| | | |
|------------------|----------------------|---|
| DOCUMENT NUMBER: | 98AON13593G | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION: | UDFN6 1.0X1.0, 0.35P | PAGE 1 OF 1 |

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.