



ELECTRICAL CHARACTERISTICS (LNA mode, 50Ω)

Conditions: $V_{CTL}=1.8V$, $T_a=25^{\circ}C$, $Z_s=Z_l=50\Omega$, with application circuit


IM2 vs. VDD

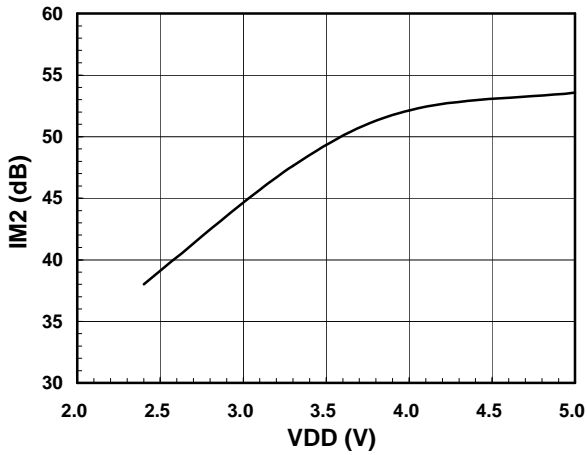


IM3 vs. VDD

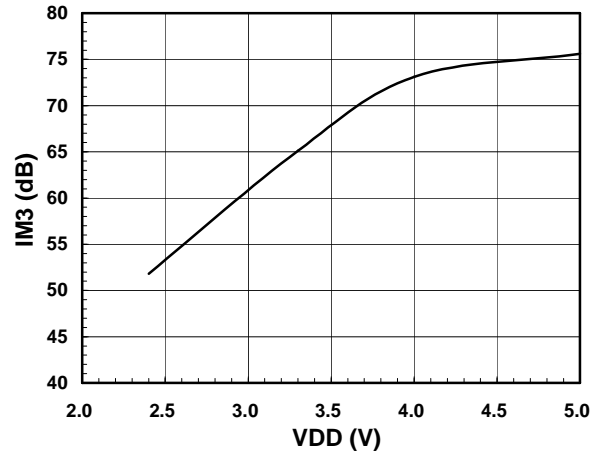


RFIN Port Return Loss vs. Frequency

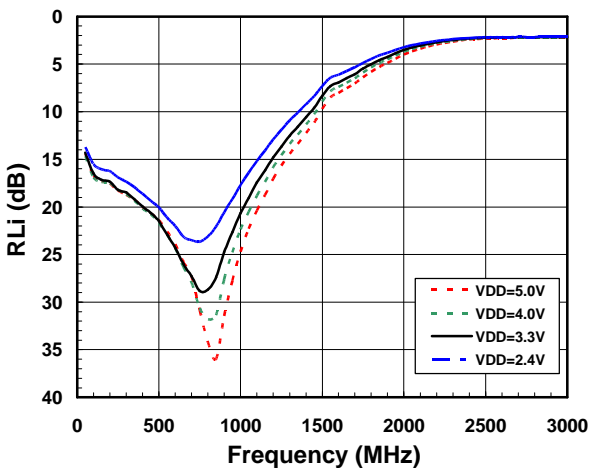

RFOUT Port Return Loss vs. Frequency

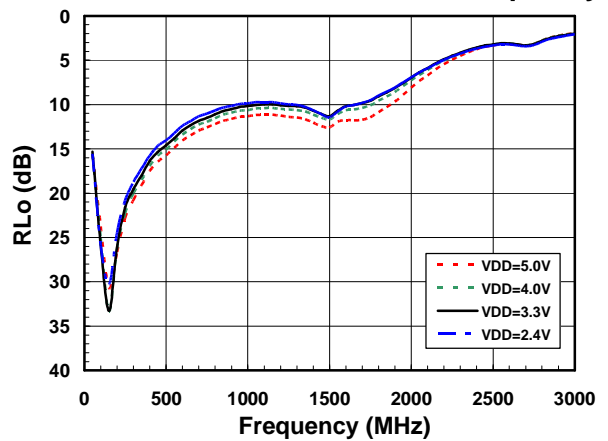

K-factor vs. Frequency

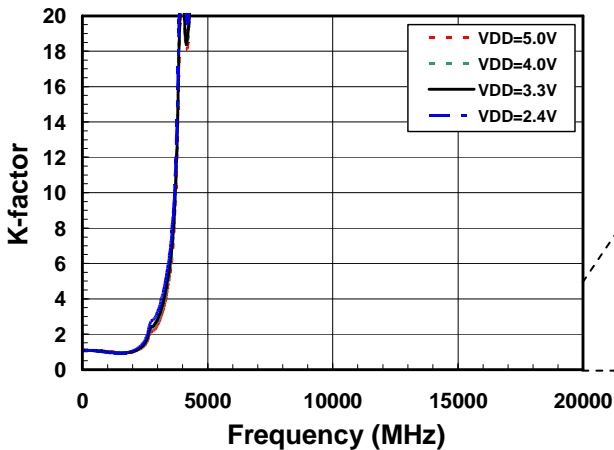

K-factor vs. Frequency

