



*Products for tomorrow*



Headquarter Europe  
MEDER electronic AG  
Friedrich-List Strasse 6  
D-78234 Engen-Welschingen  
Tel.: +49(0)7733-9487-0  
Fax: +49(0)7733-9487-32  
eMail: [info@meder.com](mailto:info@meder.com)  
Internet: [www.meder.com](http://www.meder.com)

Headquarter USA  
MEDER electronic Inc.  
766 Falmouth Rd  
Mashpee, MA 02649  
Phone: +1/ 508-539-0002  
Fax: +1/ 508-539-4088  
eMail: [salesusa@meder.com](mailto:salesusa@meder.com)

Reed Relay: NP05-1A71-500-213


Part Number: 3105171213

### Dimensions (mm)

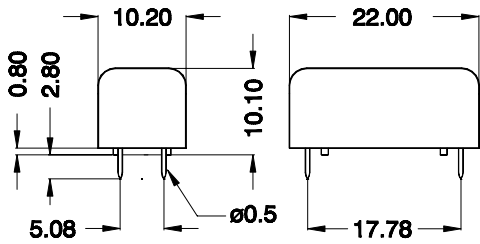

Pins:  $\varnothing$  0,5 mm / L 2,8  $\pm$  0,3 mm

### Layout 213 / Pitch 2,54 mm / Top View

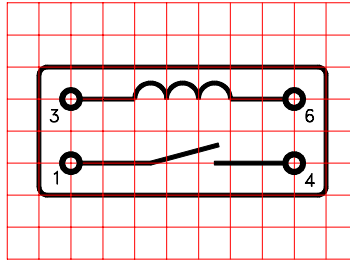

### Marking



MEDER-Label  
Type  
Production-  
Code-  
EN60062  
/Factory Code

Coil/Relay Characteristics	Conditions at 20°C	Min.	Typ.	Max.	Units
Coil Resistance		450	500	550	$\Omega$
Nominal Voltage			5		VDC
Nominal Rated Power			50		mW
Operate Voltage				3,5	VDC
Release Voltage		0,75			VDC

Contact Data 71 (Form A/Dry)					
Contact Rating	Any combination of the switching voltage and current must not exceed the given rated power			10	W
Switching Voltage	DC or Peak AC			180	V
Switching Current	DC or Peak AC			0,5	A
Carry Current	DC or Peak AC			1,5	A
Static Contact Resistance (initial)	Measured with Nominal Voltage			150	m $\Omega$
Insulation Resistance	RH 45%	10 <sup>12</sup>			$\Omega$
Breakdown Voltage		200			VDC
Operate Time, including Bounce	Measured with Nominal Voltage			0,5	ms
Release Time	Measured with no coil suppression			0,1	ms
Capacitance			0,3		pF

Environmental Data					
Insulation Resistance Coil to Contact	RH 45%	10			G $\Omega$
Dielectric Strength Coil to Contact		2,12			kV DC
Shock	½ sine wave, duration 11ms			50	g
Vibration	from 10 - 2000 Hz			20	g
Operating Temperature	10°C/min max. allowable	-20		70	°C
Storage Temperature	10°C/min max. allowable	-25		85	°C
Soldering Temperature	5 sec. at			260	°C
Cleaning				fully sealed	
Material of Case				Metal shielding	
Sealing Compound				Epoxy resin	
Material of Pins				Cu-alloy tinned	