

NSL-32SR3

60Ω ON-Resistance Photocell (CdS) Output Optocoupler

The NSL-32SR3 is an optocoupler that has an OFF-resistance of 25MΩ.

Advanced Photonix CdS photocell output optocouplers optically couple an LED to a CdS Light Dependent Resistor (LDR). The LDR resistance increases when the LED current is OFF and decreases when LED current is ON. The device showcases a large dynamic range with a response time that efficiently mimics the human eye's sensitivity to light changes. Engineered with High, Medium, and Low dark resistances, the optocouplers are available with diverse resistance values to suit various applications. The photocells are encased in an optically-isolated structures.

Applications

Industrial

AC/DC power control

Measuring Instruments

Factory Automation

Audio

Features

Compact Moisture Resistant Package

Low LED Current

Very Low "On" Resistance

Passive Resistance Output

Low Distortion

Suitable for AC or DC

Absolute Maximum Ratings


Parameter	Symbol	Min	Max	Unit
Isolation Voltage	V_R	-	2000	V
Power Dissipation	-	-	50	mW
Operating Temperature	T_{OP}	-40	+75	°C
Storage Temperature	T_{STG}	-40	+75	°C

Typical Electro-Optical Specifications at $T_A=23\text{ }^\circ\text{C}$

Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
LED						
Forward Current	-	I_F	-	-	25	mA
Forward Voltage	$I_f=20\text{mA}$	V_F	-	-	2.5	V
Reverse Current	$V_R=4\text{V}$	I_R	-	-	10	μA
CELL						
Max. Cell Voltage	Peak AC or DC	V_{MAX}	-	-	60	V
COUPLED						
On Resistance	$I_f=20\text{mA}$	R_{on}	-	-	60	Ω
	$I_f=5\text{mA}$	R_{on}	-	150	-	Ω
Off Resistance	10sec after $I_f=0\text{mA}$	R_{off}	25	-	-	$\text{M}\Omega$
Rise Time	Time for the dark to light change in conductance to reach 63% of its final value	T_R	-	5	-	msec
Decay Time	Time to reach 100K Ω after removal of $I_f=16\text{mA}$	T_D	-	10	-	msec
Cell Temp. Coefficient	$I_f > 5\text{mA}$	T_{coef}	-	0.7	-	% / °C

Typical Transfer Characteristics

Output Resistance vs. Input Current

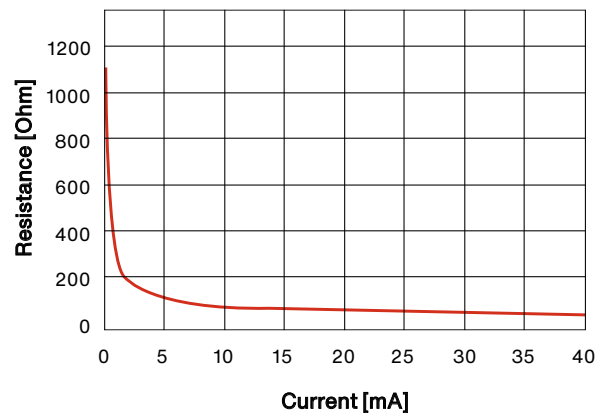

Mechanical Specifications

Units are in inches [mm]

