

NETZ 4in1

CELLULAR/LTE/MIMO/WIFI ANTENNA

Part #: 100-00142-01



Description

The NETZ 4 in 1 is a Cellular/LTE/MIMO/WIFI technology solution by Maxtena. The antenna features Cellular/LTE (698-960, 1710-2170, 2500-2700 MHz) and 2.4/5.0 GHz WIFI (2410-2490, 4920-5925 MHz) reception.

The 4 in 1 solution is ideal for high data throughput and streaming, video, industrial and IOT applications. The antennas advanced technology ensures constant reception and transmission. The under side of the antenna contains a foam adhesive for easy, reliable mounting. The antenna is waterproof and rated IP69K. It is available with an SMA, FAKRA or customer specified connector and cable length.

Features

- Screw Mount
- High Performance
- Rated IP67, IP69K and IK09
- Compact Size: 96 x 96 x 94 mm
- Custom Cable and Connector

Cable (LTE) Electrical Specifications

Parameter	Specification		
Standards	4GLTE/FirstNet/LPWA/CAT-X/CAT-Mx/CAT-NBx/NB-IoT/3G2G		
Band (MHz)	700/850/900	1700/1800/1900/2100	2600
Frequency (MHz)	698-960	1710-2170	2500-2700
Return Loss (dB)	-10.6	-16.3	-13.9
VSWR	2.0:1	1.4:1	1.5:1
Efficiency (%)	45.1	47.1	46.8
Peak Gain (dBi)	0.9	3.3	4.4
Average Gain (dB)	-3.5	-3.3	-3.3
Impedance (Ohm)	50		
Polarization	Linear		
Radiation Pattern	Omni-Directional		
Max Input Power (W)	25		
Connector Type	SMA-Male Standard (other connectors available)		
Cable Length	300 cm Standard (any cable length available)		
Cable Type	LL195 Standard (other cables available)		


Cable (WIFI) Electrical Specifications

Parameter	Specification	
Standards	WiFi, BT, ZigBee, WIFI	
Band (MHz)	2.4 GHz	5.0 GHz
Frequency (MHz)	2410-2490	4920-5925
Return Loss (dB)	-12.6	-14.4
VSWR	1.6:1	1.5:1
Efficiency (%)	44.9	35.9
Peak Gain (dBi)	4.8	3.0
Average Gain (dB)	-3.5	-4.5
Impedance (Ohm)	50	
Polarization	Linear	
Radiation Pattern	Omni-Directional	
Max Input Power (W)	25	
Connector Type	SMA-Male Standard (other connectors available)	
Cable Length	300 cm Standard (any cable length available)	
Cable Type	LL195 Standard (other cables available)	

Mechanical Specifications


Parameter	Specification
Mounting Type	Screw Mount
Dimensions (mm)	96 x 96 x 94
Radome Type	ASA UV Stable
Radome Color	Black or White
Antenna Base	ASA UV Stable
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40to +85
Ingress Protection	IP67, IP69, IK09
Substance Compliance	RoHS

Radiation Pattern Reference

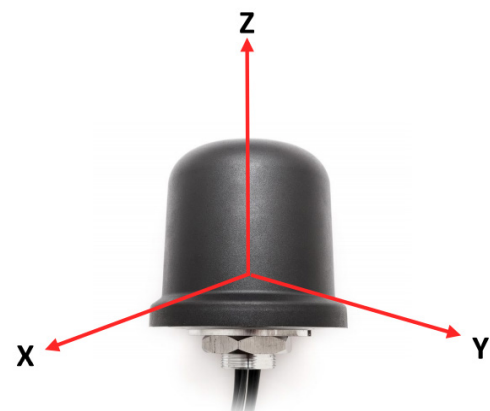


Radiation Performance


Cellular/LTE

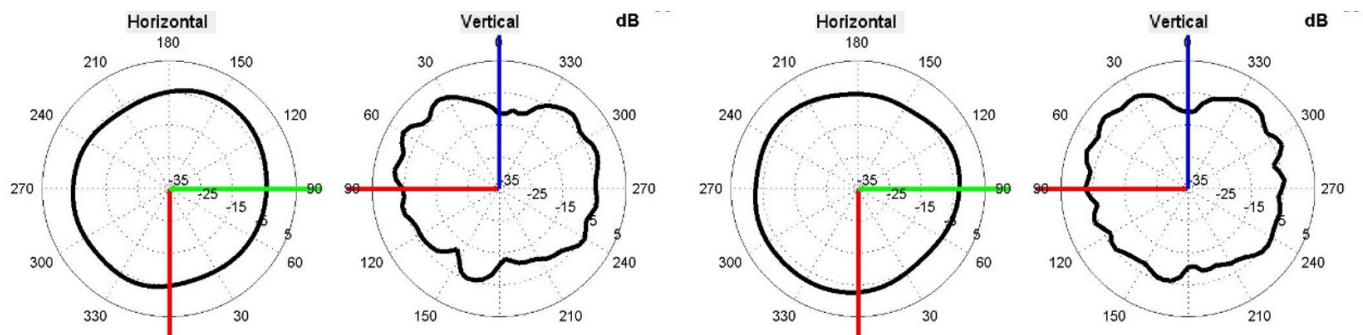

750 and 850 MHz Radiation Pattern

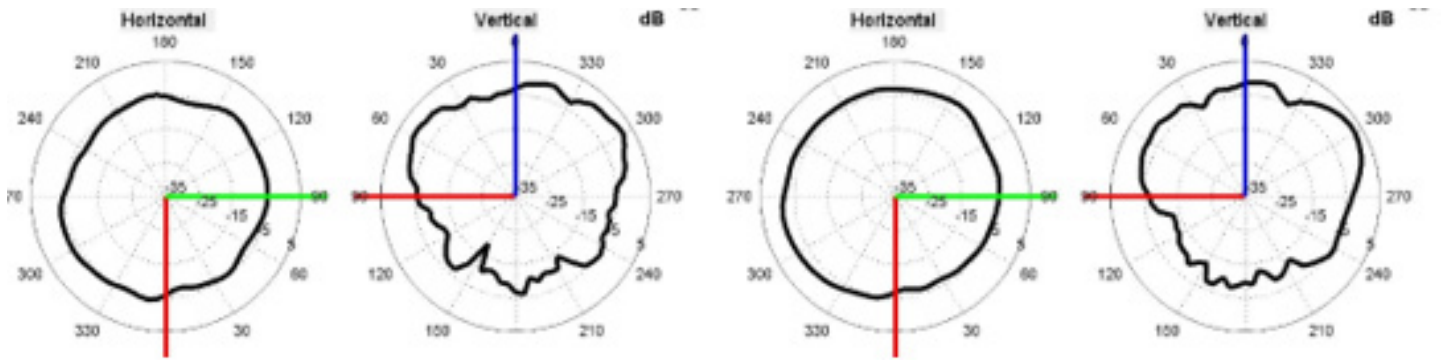


1850 and 1960 MHz Radiation Pattern

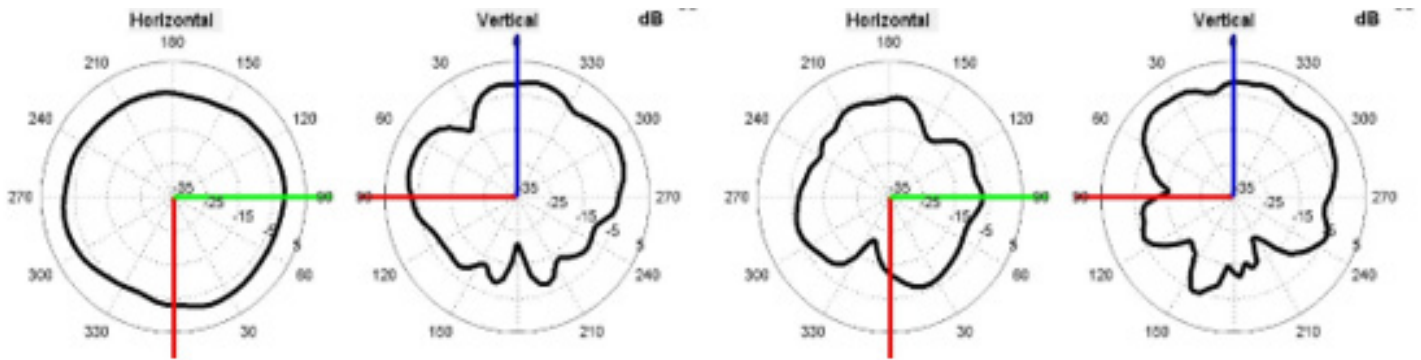

2100 and 2600 MHz Radiation Pattern

Radiation Performance
2.4/5.0 GHz WIFI

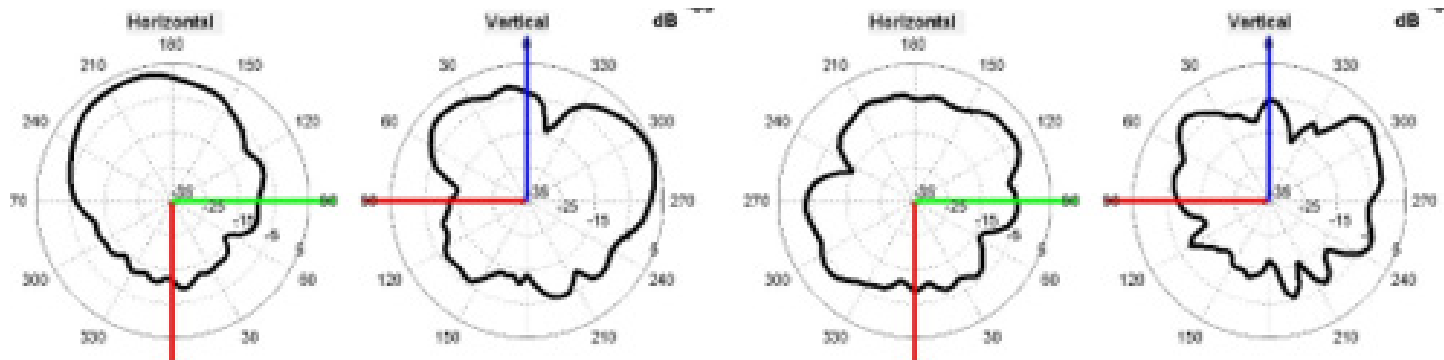

2450 and 5500 MHz Radiation Pattern