


OA225AP IP Rated Series



AC Fans - 115, 230V
225mm x 80mm (8.9" x 3.2")

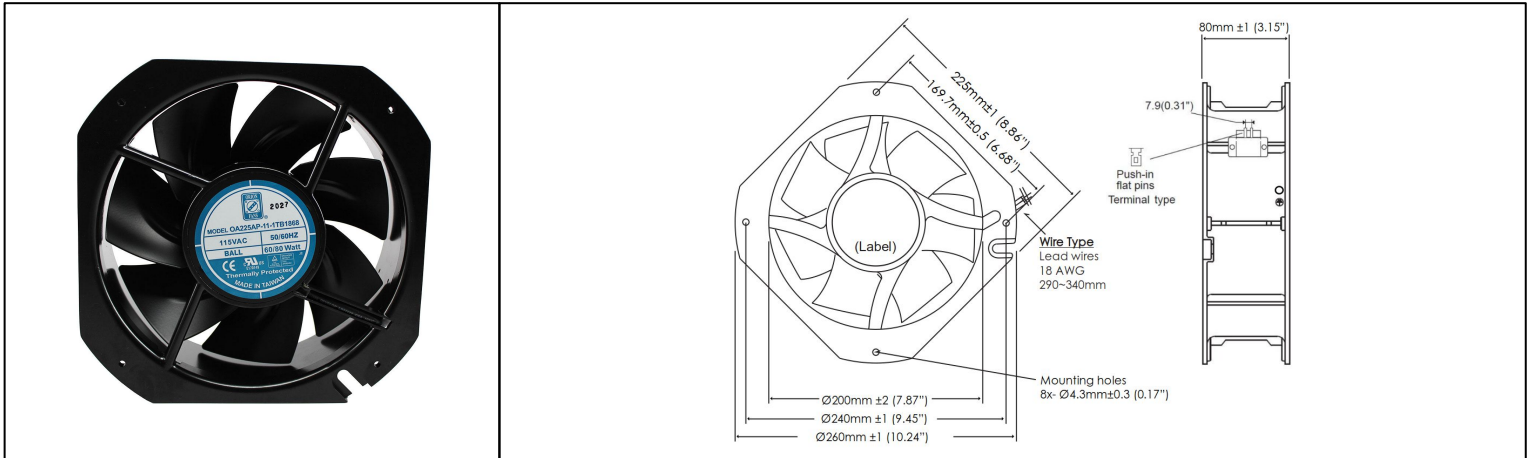

| | | | |
|------------------------------|---|---|----------------------------|
| Frame | Die Cast Aluminum, Black | Operating Temperature -30°C ~ +80°C Storage Temperature -40°C ~ +100°C Life Expectancy 45,000 Hours (L10 at 55°C) Installed Options IP Rating Available Options Tachometer Output Alarm Output Other Speeds Available Weight: 4.81 lbs | <p>*60 Hz Values Shown</p> |
| Impeller | Steel, All Metal, 7 Blades | | |
| Connection | Lead Wires 18 AWG, or Terminals | | |
| Motor | AC, Capacitor Induction, Outer Rotor, Single Phase, Thermal Protected | | |
| Bearing System | Ball Bearings | | |
| Dielectric Strength | 1500VAC/min, <5mA | | |
| Insulation Resistance | ≥100MΩ @ 500VAC | | |

| Part Number | Rated Voltage (Volts AC) | Voltage Range (Volts AC) | Input Power (Watts) | Frequency (Hz) | Rated Speed (RPM) | Max Airflow (CFM) | Noise Level (dBA) | Max Static Pressure ("H ₂ O) |
|--------------------|--------------------------|--------------------------|---------------------|----------------|-------------------|-------------------|-------------------|---|
| OA225AP-11-1*BIPxx | 115 | 100 ~ 130 | 60 / 80 | 50 / 60 | 2700 / 3100 | 540 / 620 | 66.2 | 0.74 |
| OA225AP-22-1*BIPxx | 230 | 200 ~ 255 | 60 / 80 | 50 / 60 | 2700 / 3100 | 540 / 620 | 66.2 | 0.74 |

*Insert "T" for Terminal or "W" for Lead Wire
xx = Insert "68" for IP68 Rated or "69K" for IP69K rating