


# OA225AP IP Rated Series



AC Fans - 115, 230V  
225mm x 80mm (8.9" x 3.2")

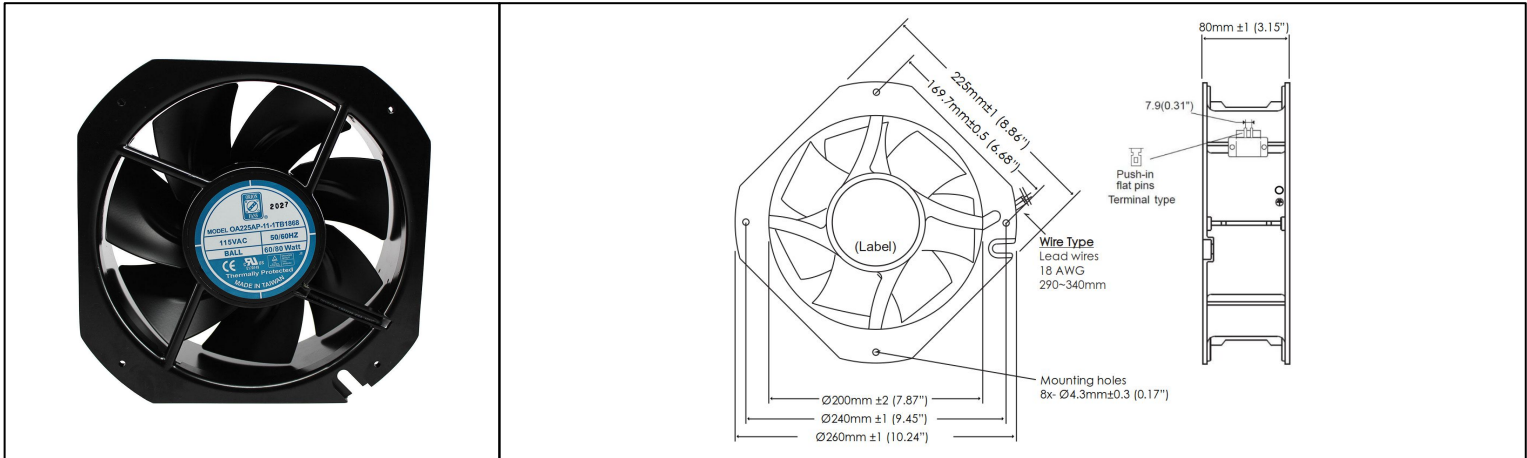

<b>Frame</b>	Die Cast Aluminum, Black	<b>Operating Temperature</b> -30°C ~ +80°C	<p>*60 Hz Values Shown</p>
<b>Impeller</b>	Steel, All Metal, 7 Blades	<b>Storage Temperature</b> -40°C ~ +100°C	
<b>Connection</b>	Lead Wires 18 AWG, or Terminals	<b>Life Expectancy</b> 45,000 Hours (L10 at 55°C)	
<b>Motor</b>	AC, Capacitor Induction, Outer Rotor, Single Phase, Thermal Protected	<b>Installed Options</b> IP Rating	
<b>Bearing System</b>	Ball Bearings	<b>Available Options</b> Tachometer Output Alarm Output Other Speeds Available	
<b>Dielectric Strength</b>	1500VAC/min, <5mA	Weight: 4.81 lbs	
<b>Insulation Resistance</b>	≥100MΩ @ 500VAC		

Part Number	Rated Voltage (Volts AC)	Voltage Range (Volts AC)	Input Power (Watts)	Frequency (Hz)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H <sub>2</sub> O)
OA225AP-11-1*BIPxx	115	100 ~ 130	60 / 80	50 / 60	2700 / 3100	540 / 620	66.2	0.74
OA225AP-22-1*BIPxx	230	200 ~ 255	60 / 80	50 / 60	2700 / 3100	540 / 620	66.2	0.74

\*Insert "T" for Terminal or "W" for Lead Wire  
xx = Insert "68" for IP68 Rated or "69K" for IP69K rating