



TAOGLAS®

Datasheet

Barracuda

Part No:
OMB.433.B06F21

Description:

Barracuda - 433MHz 6dBi Omni Directional Outdoor Antenna with N Type Female Connector

Features:

- Omni-Directional Radiation Pattern
- Collinear
- 6dBi Peak gain, 433 MHz
- Fiberglass Housing
- Robust design for all weather operation
- IP65 waterproof
- Length: 1473mm | Weight: 1300g
- N type Female connector
- Mounting bracket included
- RoHS & Reach Compliant

1. Introduction	3
2. Specifications	4
3. Antenna Characteristics	5
4. Radiation Patterns	7
5. Mechanical Drawing	11
6. Packaging	12
7. Antenna Installation Guide	13
<hr/>	
Changelog	14

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The OMB.433.B06F21 is a 6dBi fiberglass omni-directional outdoor antenna, operating in 433 MHz ISM band. The antenna is designed for applications such as metering, industrial/environmental monitoring, remote asset monitoring and mesh network applications.

The OMB.433 operates at 433MHz, one of the most widely used license free ISM bands, with a 6dBi peak gain. The omni-directional antenna radiates uniformly in the azimuth providing coverage over long distances. Coupled with a very low VSWR, this characteristic provides the best performance because the antenna gives maximum coverage range in the horizontal plane over 360 degrees, thus minimizing the amount of nodes needed for a mesh network.

The UV resistant fiberglass housing enables the OMB antenna to be utilized in all kinds of harsh environments, making it more robust and safer than traditional whip antennas. It can be connected directly to the access point or telemetry unit, or can be mounted on wall or device surface via the N-type connector.

A smaller model, OMB.433.B03F21, with 3dBi peak gain, is also available.


2. Specifications

Electrical	
Frequency (MHz)	433
Antenna Type	Collinear Dipole Array
Peak Gain	6 dBi
Polarization	Vertical
Impedance	50 ohms
Max Input Power	100 watts
VSWR	1.5:1
Radiation	Omni-Directional
Vertical Beamwidth	13 Deg
Horizontal Beamwidth	360 Deg
Internal Material	Copper
Connector	N Type Female
Mechanical	
Length	1473 mm(Max)
Radome Diameter	24mm
Bracket Dimension	70 x 73mm(Max)
Antenna Weight	1040g
Mounting Accessories Weight	70g
Application	Indoor/Outdoor
Radome Material	White Fiberglass
Bracket Material	Aluminum
Mount Style	Pole Mount/Wall Mount
Mount Hardware Material	Stainless Steel
Wind Resistance	>150mph (>241km/h)
Waterproof	IP65
Environmental	
Storage Temperature	-40°C to +85°C
Operating Temperature	-40°C to +85°C
Operating Humidity	10%~90% non-condensing
Storage Humidity	5%~90% non-condensing


3. Antenna Characteristics

3.1 ISM 433


Return Loss

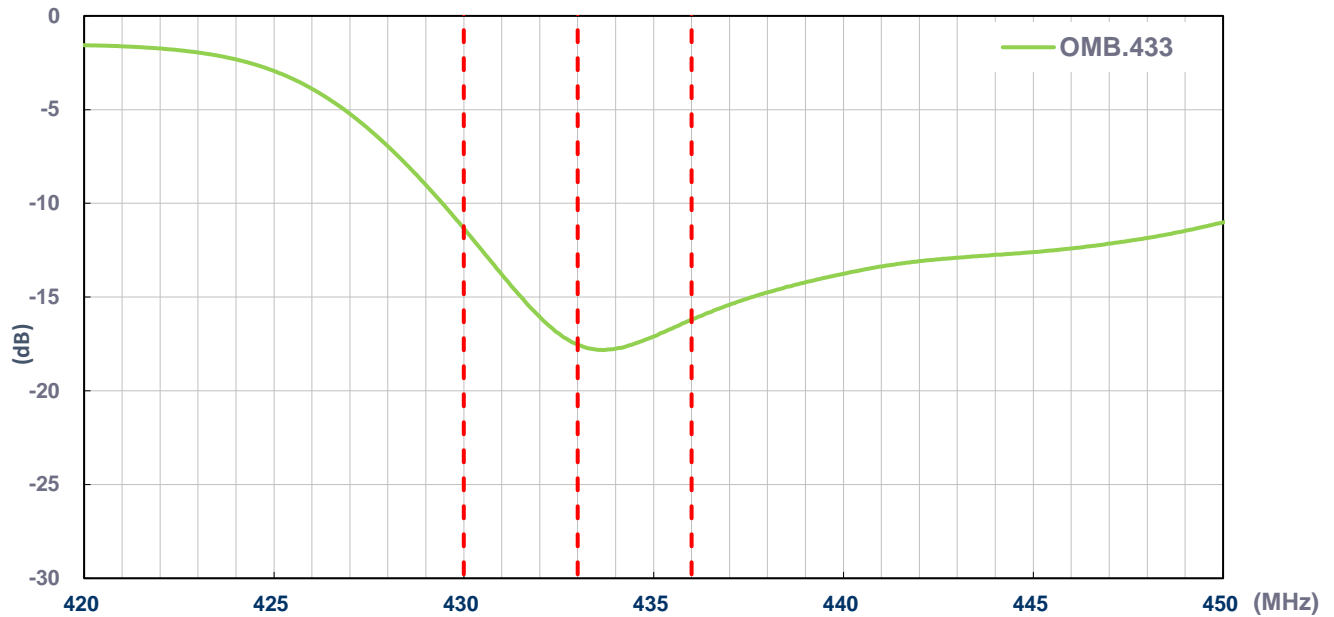


Efficiency

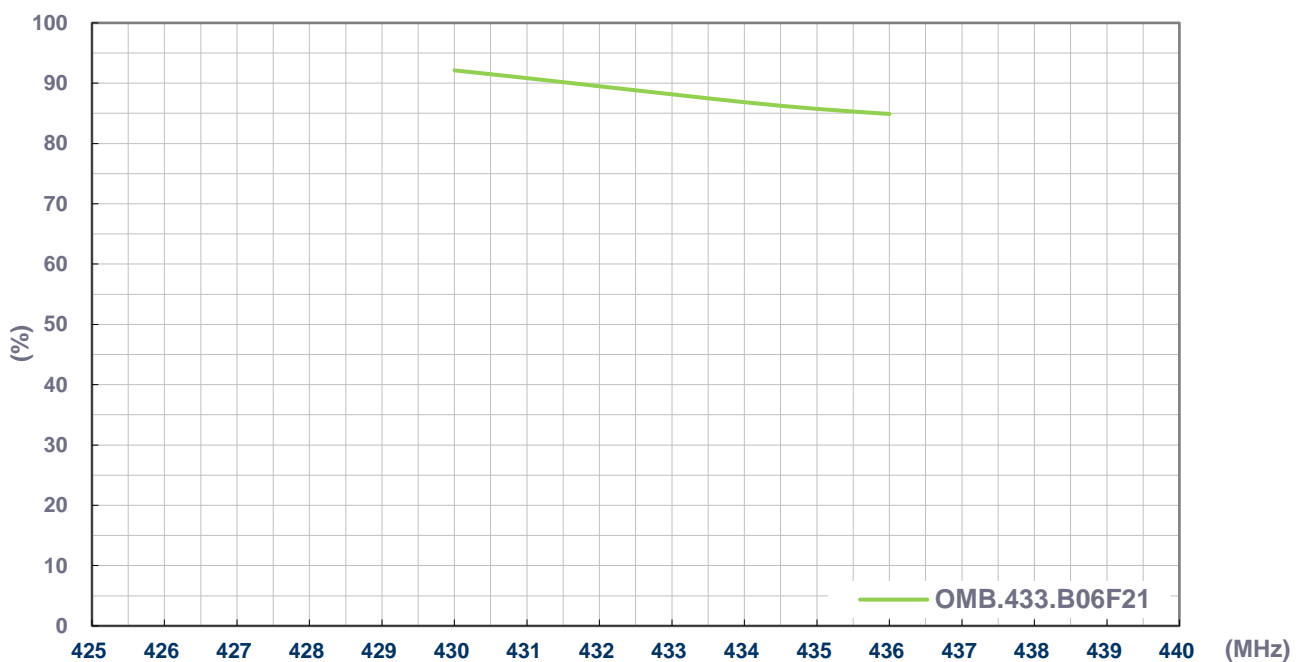

Average Gain

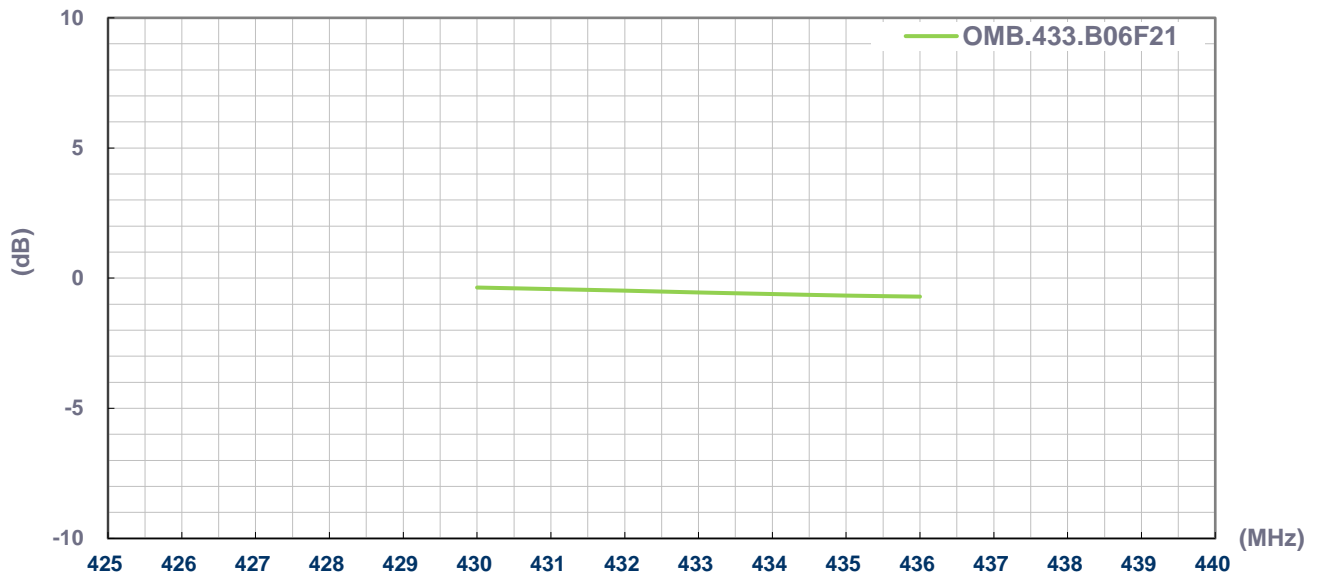


Peak Gain

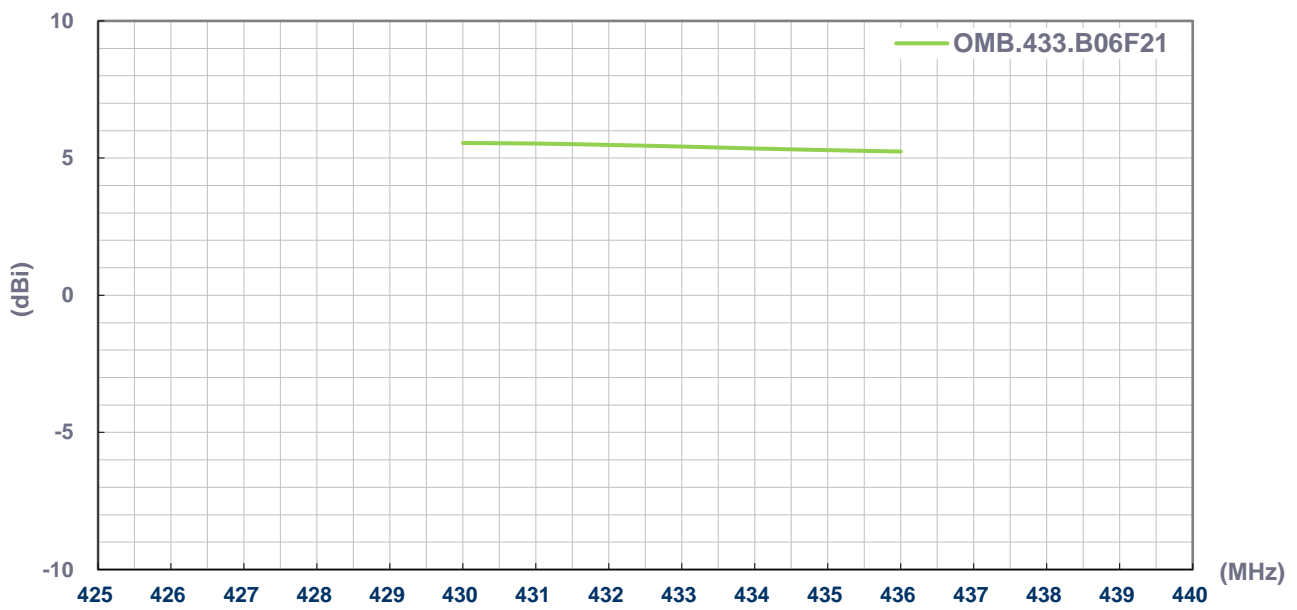


4. Radiation Patterns

4.1 Test Setup

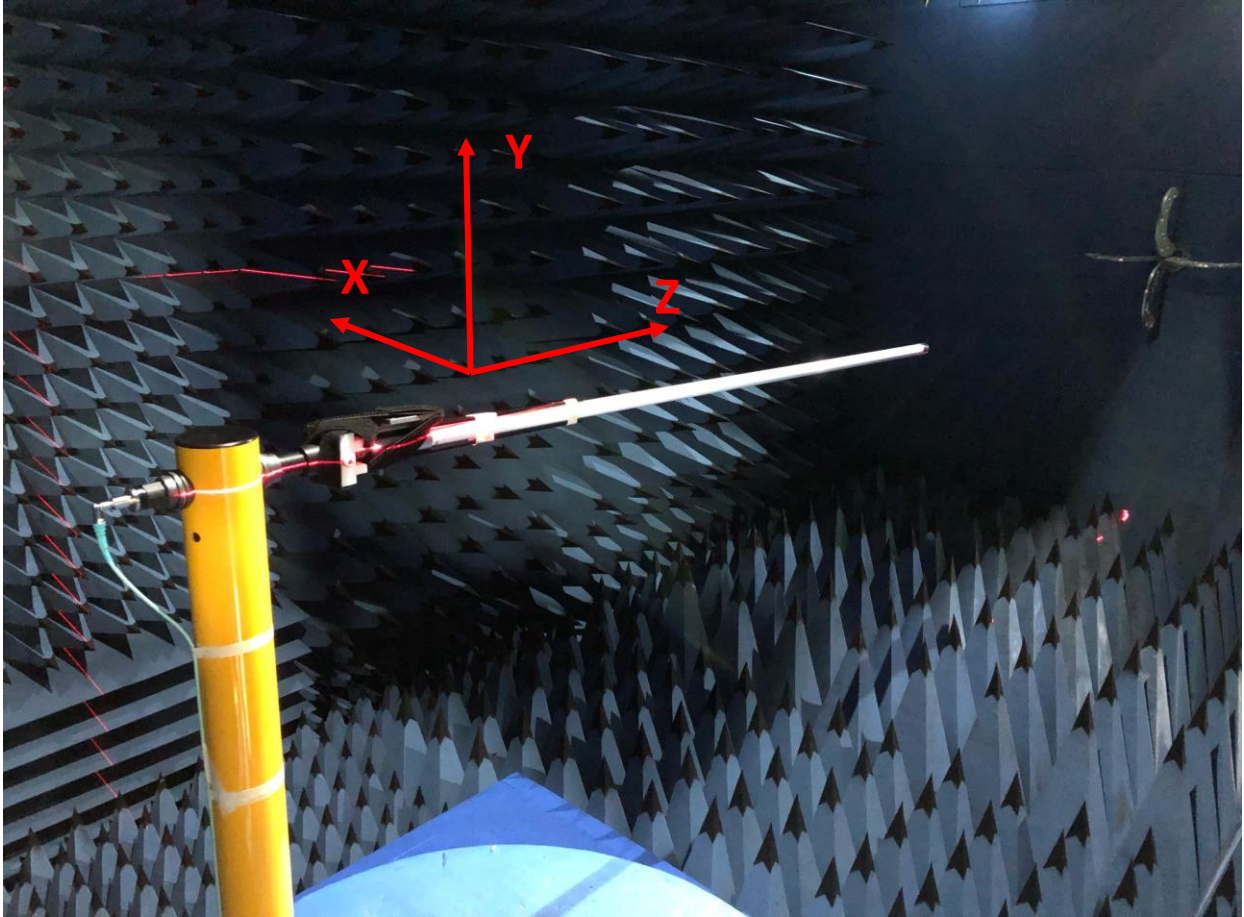




4.2 430MHz 3D and 2D Radiation Patterns

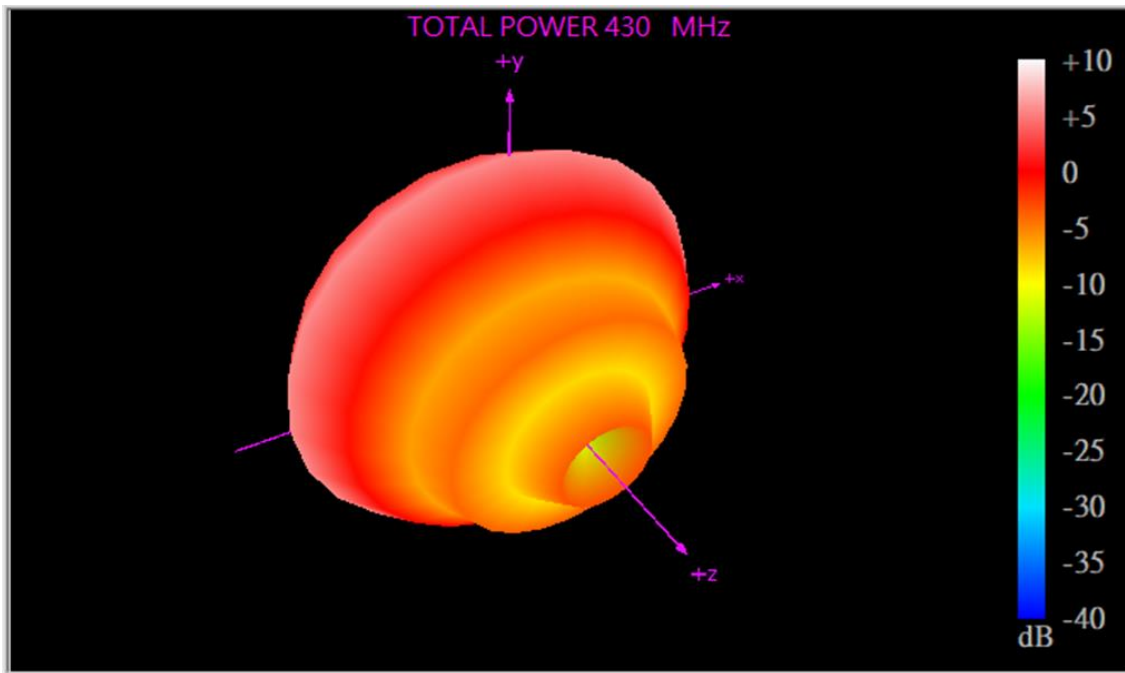


XZ Plane

YZ Plane




XY Plane

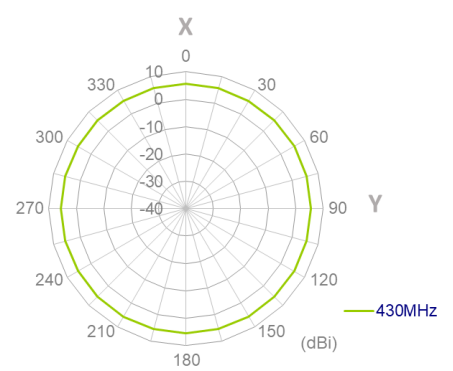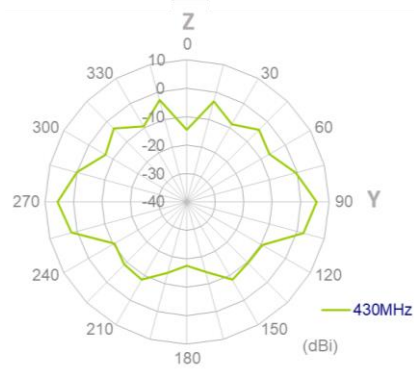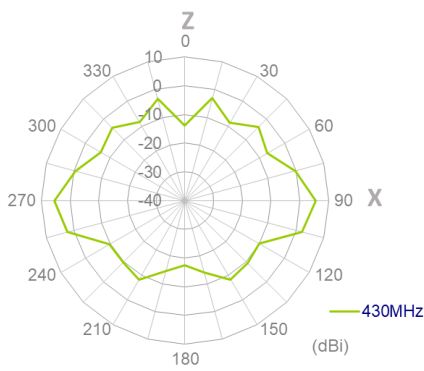


4.3 433 MHz 3D and 2D Radiation Patterns

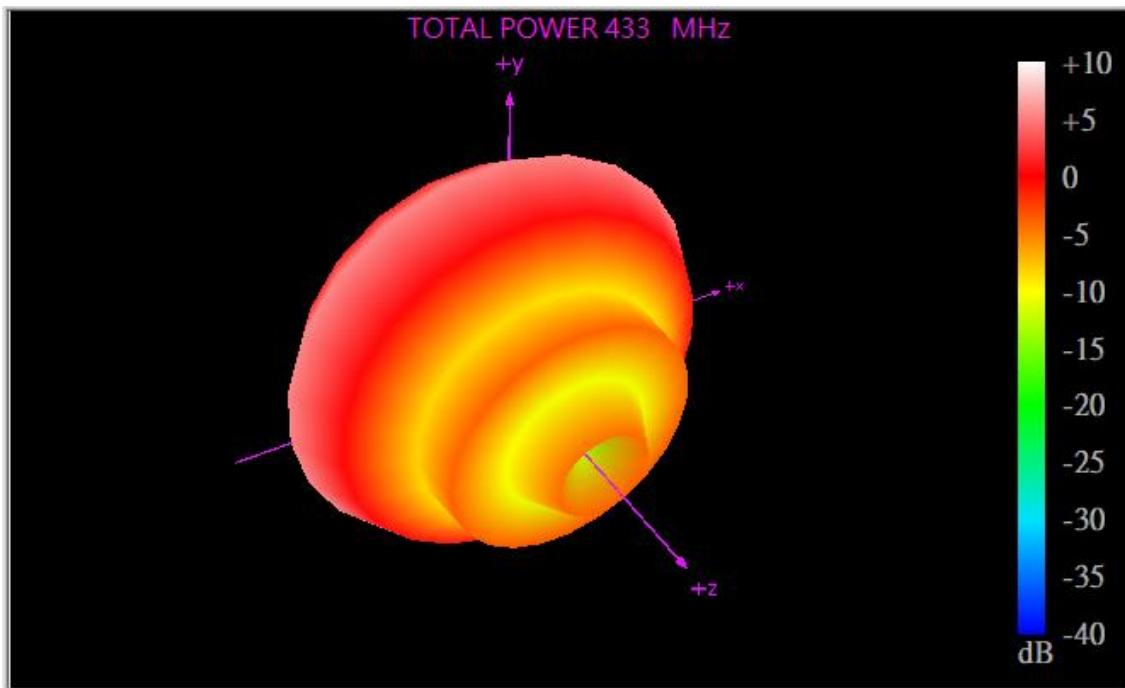

XZ Plane YZ Plane XY Plane

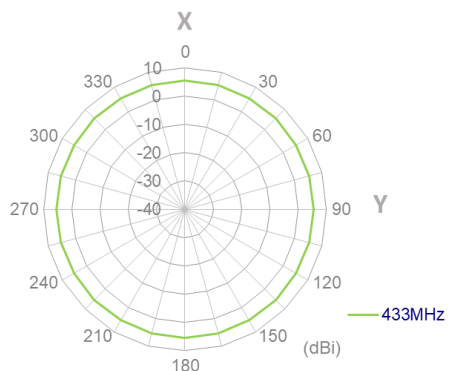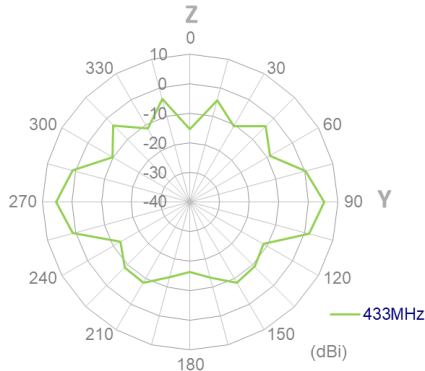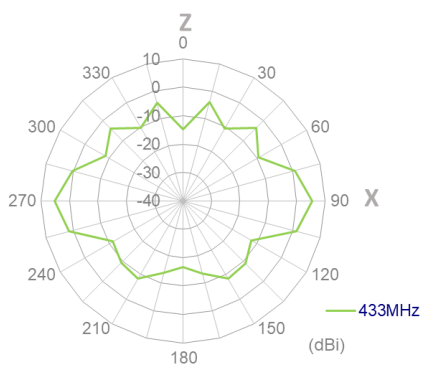




4.4 436 MHz 3D and 2D Radiation Patterns

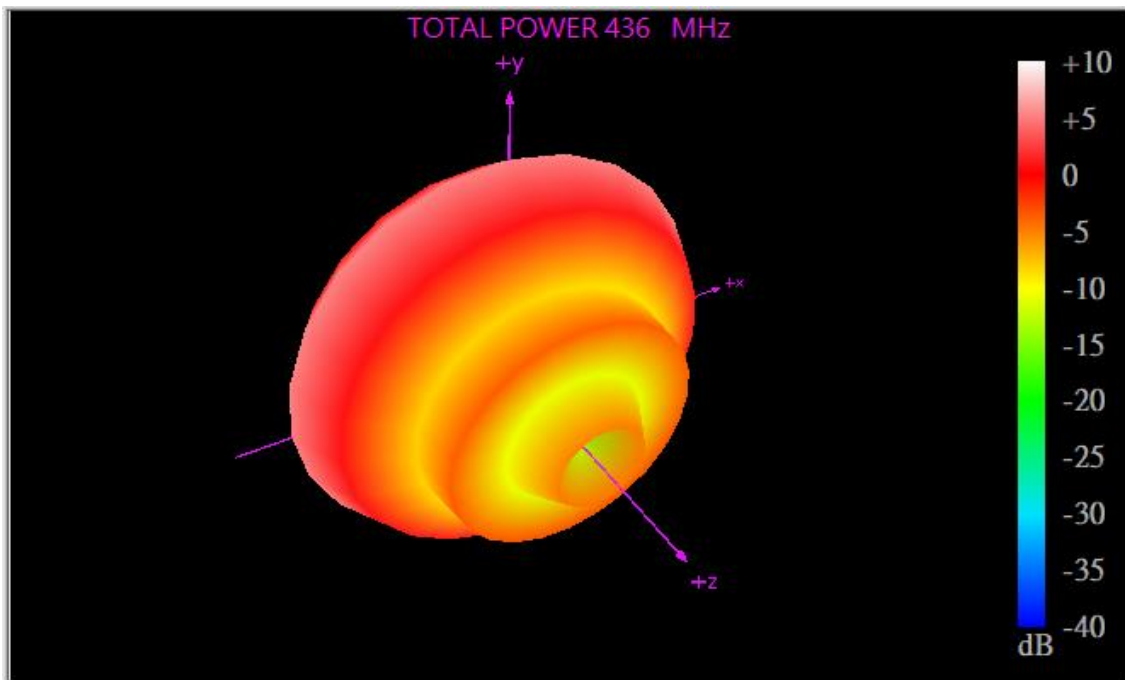


XZ Plane

YZ Plane

XY Plane

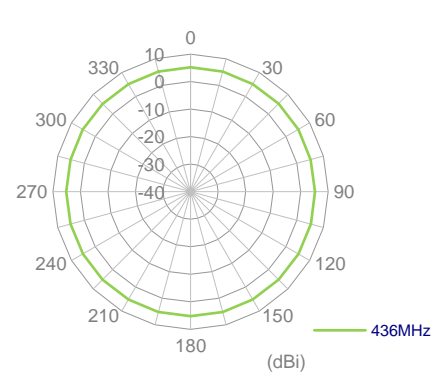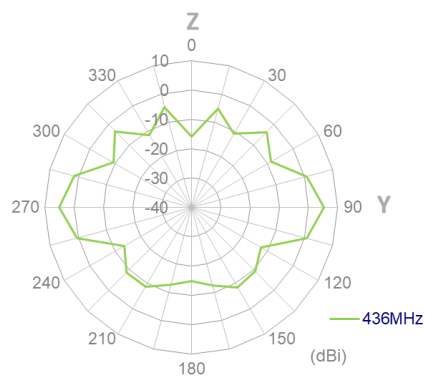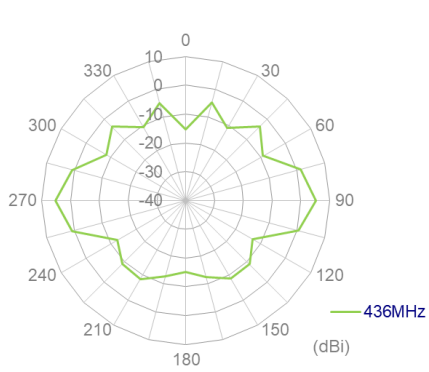

5. Mechanical Drawing (Units: mm)

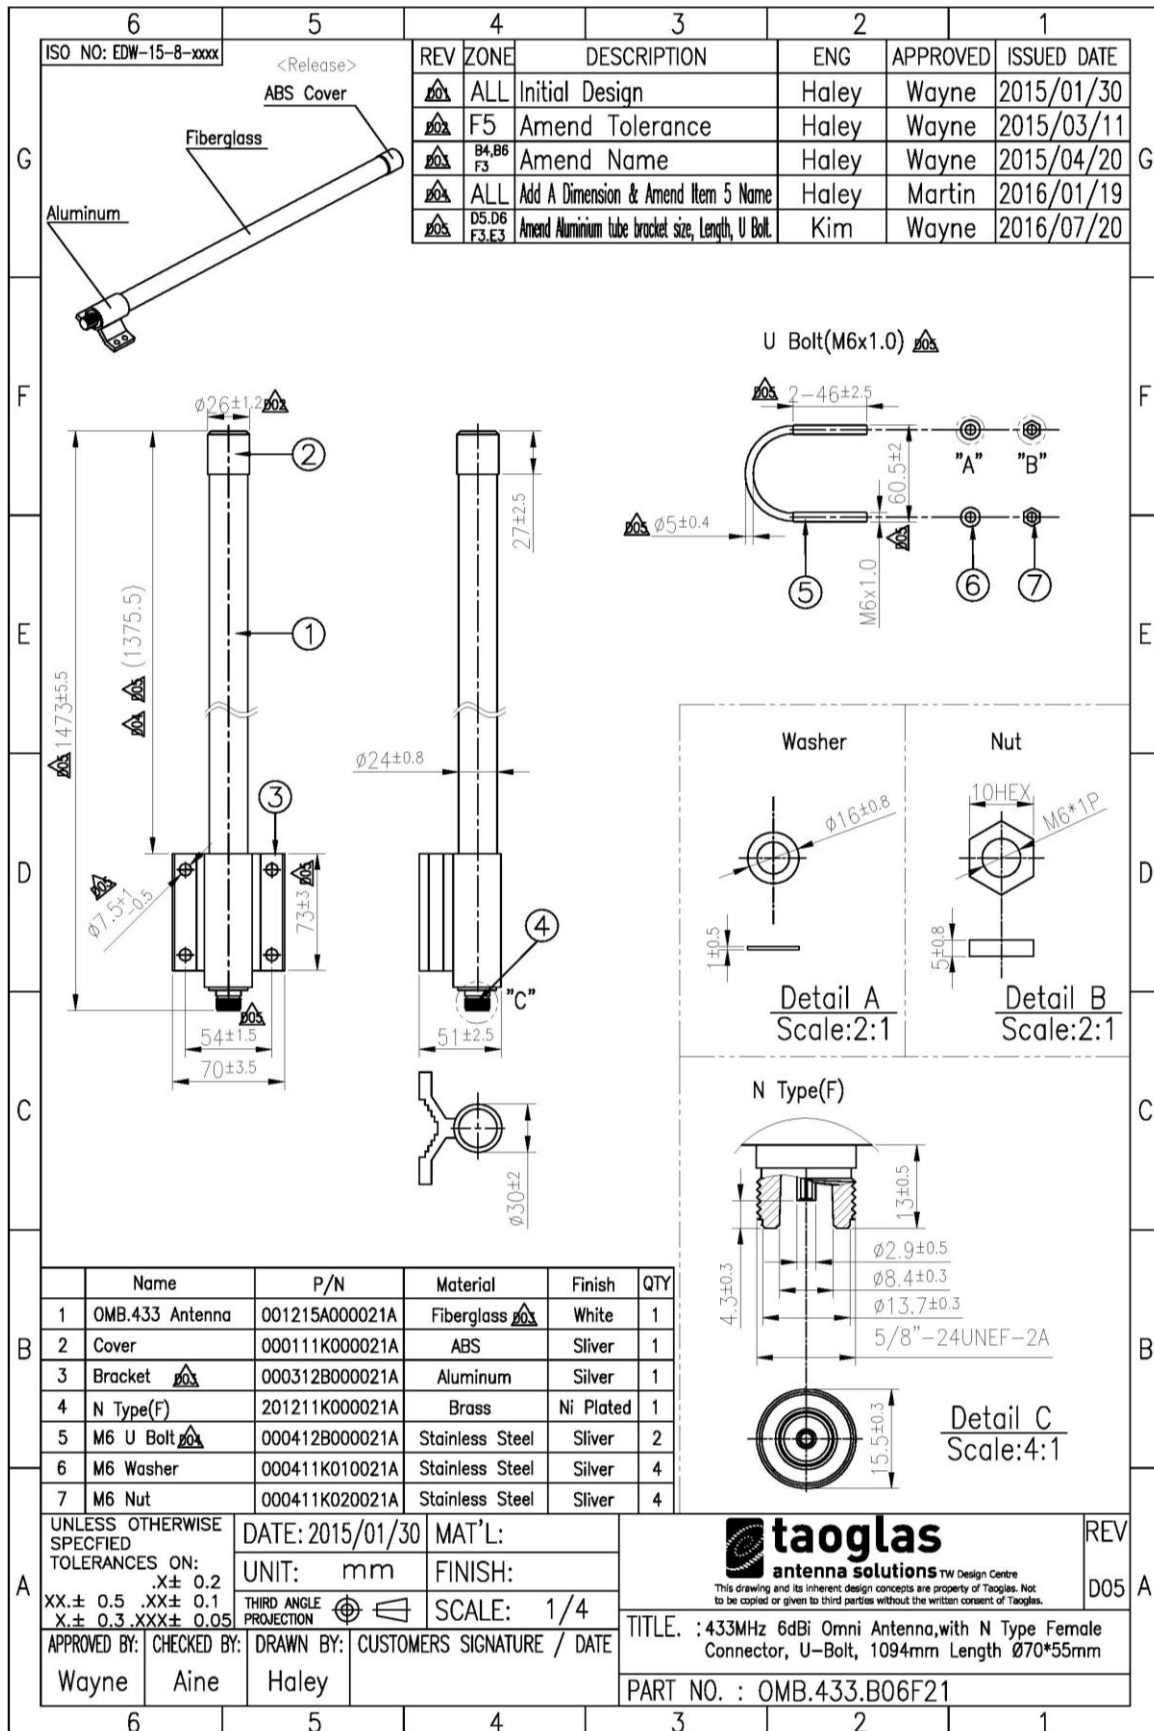

REV	ZONE	DESCRIPTION	ENG	APPROVED	ISSUED DATE
1	ALL	Initial Design	Haley	Wayne	2015/01/30
2	F5	Amend Tolerance	Haley	Wayne	2015/03/11
3	B4,B6 F3	Amend Name	Haley	Wayne	2015/04/20
4	ALL	Add A Dimension & Amend Item 5 Name	Haley	Martin	2016/01/19
5	D5,D6 F3,E3	Amend Aluminium tube bracket size, Length, U Bolt.	Kim	Wayne	2016/07/20

Name	P/N	Material	Finish	QTY
1 OMB.433 Antenna	001215A000021A	Fiberglass	White	1
2 Cover	000111K000021A	ABS	Sliver	1
3 Bracket	000312B000021A	Aluminum	Silver	1
4 N Type(F)	201211K000021A	Brass	Ni Plated	1
5 M6 U Bolt	000412B000021A	Stainless Steel	Sliver	2
6 M6 Washer	000411K010021A	Stainless Steel	Silver	4
7 M6 Nut	000411K020021A	Stainless Steel	Sliver	4

UNLESS OTHERWISE SPECIFIED
TOLERANCES ON:
XX± 0.5 .XX± 0.1
X± 0.3 .XXX± 0.05

DATE: 2015/01/30 MAT'L:
UNIT: mm FINISH:
THIRD ANGLE PROJECTION SCALE: 1/4

APPROVED BY: WAYNE
CHECKED BY: AINE
DRAWN BY: HALEY
CUSTOMERS SIGNATURE / DATE


taoglas
antenna solutions TW Design Centre
This drawing and its inherent design concepts are property of Taoglas. Not to be copied or given to third parties without the written consent of Taoglas.

TITLE: .433MHz 6dBi Omni Antenna, with N Type Female Connector, U-Bolt, 1094mm Length Ø70*55mm
PART NO. : OMB.433.B06F21


REV D05

6. Packaging


1 OMB.433.B06F21 per tube
 Tube Dimensions - Ø80mm*Height 1530mm
 Total Weight - 1557.5g

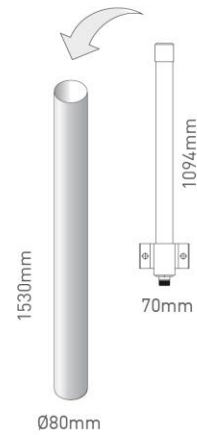


10 tubes per carton
 Carton Dimensions - 1540*400*180mm
 Weight - 17.29Kg

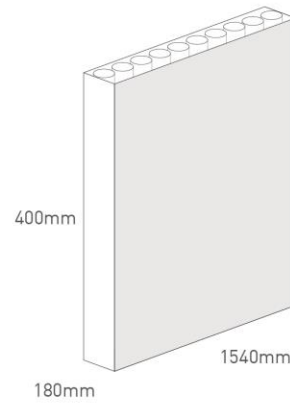

Pallet Dimensions 1570mm*1000mm*1460mm
 14 Cartons per Pallet
 2 Cartons per layer
 7 Layers

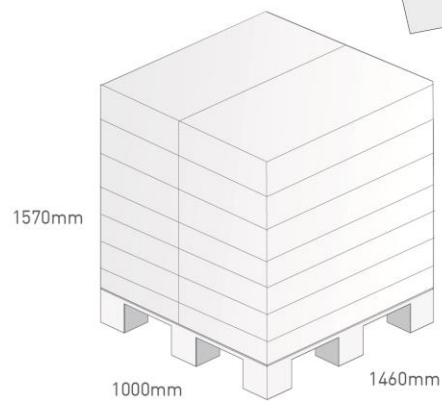

7. Antenna Installation Guide

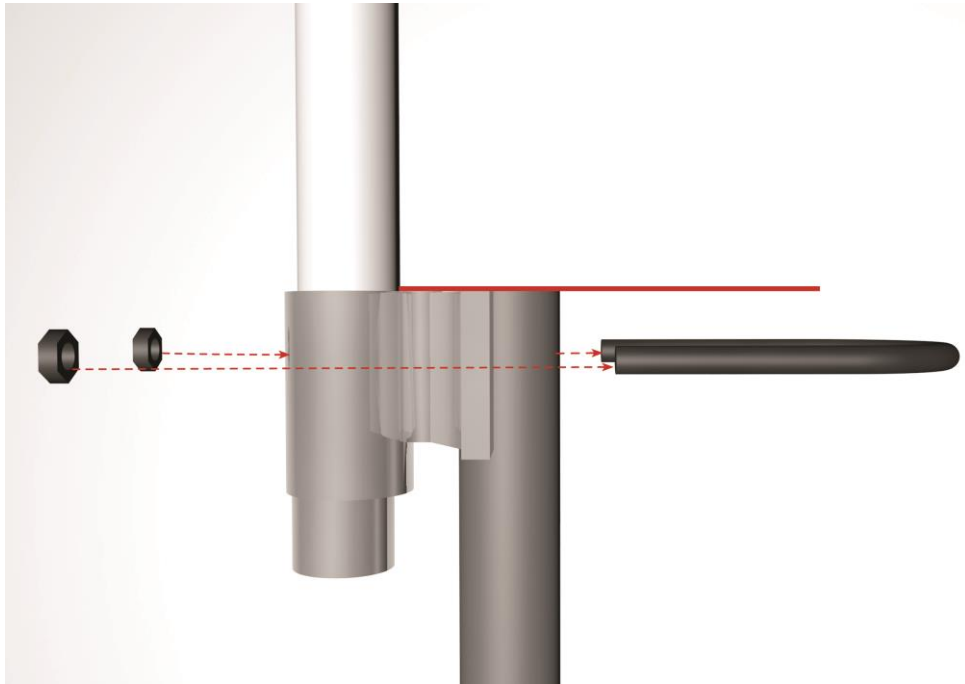

Changelog for the datasheet

SPE-16-8-020 – OMB.433.B06F21

Revision: E (Current Version)

Date:	2019-08-29
Notes:	Updated template, added Return Loss, Efficiency, Average Gain
Author:	Yu Kai Yeung

Previous Revisions
