



OpenIMU330

Triple Redundant 1.5°/Hr SMT IMU




The ACEINNA OpenIMU330B is a small form factor high-performance 6-DOF open inertial platform. The OpenIMU330B features a triple-redundant 3-Axis Accelerometer and 3-Axis Rate Gyroscope for excellent accuracy and reliability. It is powered by a 32 Bit ARM M4 CPU with Floating Point Unit. The OpenIMU330B runs the OpenIMU open-source stack that includes an optimized full-state Kalman Filter for Attitude and GPS-Aided Position-Velocity-Time (PVT) measurement. A free tool-chain based on VS Code supports PC, MAC, and Ubuntu.

The ACEINNA OpenIMU330B is designed for use in automotive Level 3 ADAS systems. The triple-redundant architecture combined with the small, low-cost packaging is intended to meet the challenging performance, reliability and cost requirements of the automotive market.

Applications

- Autonomous Vehicles
- Self-Driving Taxis/Delivery Vehicles
- ADAS Systems
- Electronic Stability Control
- Lane Keep Assist

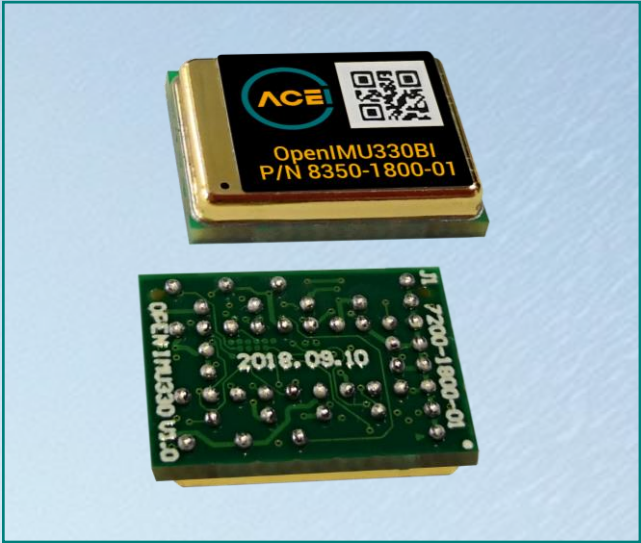

Features

- Triple Redundant, 3 axis MEMS angular rate sensor
- Triple Redundant, High Performance 3 axis MEMS Accelerometer
- Open Source Tool Chain and Custom Algorithms, ARM M4 CPU
- Built in 16-State Open Source Extended State Kalman Filter
- Automotive Grade ASIL-B Version
- SPI and UART interfaces
- Up to 3 UARTs
- Wide Temp Range, -40C to +85C
- High Reliability, MTBF > 50k hours
- Open Community & Support

This product has been developed exclusively for commercial applications. It has not been tested for, and makes no representation or warranty as to conformance with any military specifications or its suitability for any military application or end-use. Additionally, any use of this product for nuclear, chemical or biological weapons, or weapons research, or for any use in missiles, rockets, and/or UAV's of 300km or greater range, or any other activity prohibited by the Export Administration Regulations, is expressly prohibited without the written consent and without obtaining appropriate US export license(s) when required by US law. Diversion contrary to U.S. law is prohibited. Specifications are subject to change without notice.

Technical Characteristics

Ta = 25°C, VDC = 3.3V, unless otherwise stated


Ready-to Use Algorithms	Outputs		
IMU	Calibrated Accel, Gyro		
VG-AHRS	Dynamic Roll, Pitch Heading		
INS	Position, Velocity, Attitude		
Angular Rate	MIN	TYP ²	MAX
Range (°/s)	-400		400
Resolution (°/s)	<0.02		
Bias Instability (°/hr) ¹		1.5	
Bias Stability over Temp (°/s)		0.3	
Scale Factor Accuracy (%)		0.02	
Cross-Axis Error (%FSR)		0.01	
Angle Random Walk (°/√hr) ¹		0.2	
Configurable Bandwidth (Hz)	5		50
Acceleration	MIN	TYP ²	MAX
Range (g)	-8		+8
Resolution (mg)	<0.5		
Bias Instability (μg) ¹		20	
Bias Stability over Temp (XY (mg))		3	
Bias Stability over Temp (Z (mg))		7	
Scale Factor Accuracy (%FSR)		0.03	
Cross-Axis Error (%FSR)		0.03	
VRW (m/s/√hr) ¹		0.04	
Configurable Bandwidth (Hz)	5		50
Electrical	MIN	TYP	MAX
Input Voltage (V)	3.0		5.5
Current Consumption (mA)		20	
Interface	SPI or UART		
Output Data Rate – SPI (Hz)			200
Output Data Rate – UART (Hz)			100
Environment			
Operating Temperature (°C)	-40 °C to 85°C		
Non-Operating Temperature (°C)	-40 °C to 85°C		
Physical			
Size (mm)	11 x 15 x 3		
Weight (gm)	1.0		
Interface Connector	44 ball, ball grid array (BGA)		

Note 1: Allen variance curve, constant temperature

Note 2: Typical values are 1 sigma values unless otherwise noted

Ordering Information

Part Ordering Information	
EZ Family High-Performance OpenIMU Platform	
OpenIMU330BI	Industrial Grade: 6 DOF IMU, FSR = 400dps / ±8g
OpenIMU330BA	Automotive Grade (ASIL B): Contact Aceinna
OpenIMU330BI EVK	Developer Kit with OpenIMU330BI, EVB, JTAG, and Precision Test Fixture

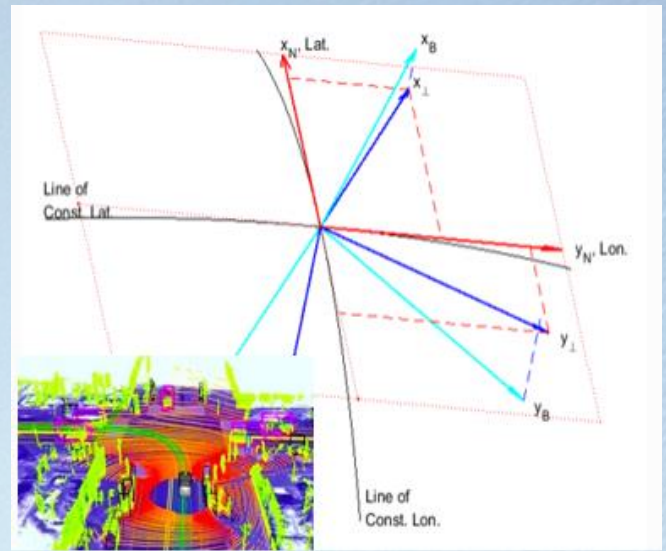

Developer Tools

Embedded navigation applications can be quickly developed on PC, MAC, and Ubuntu and deployed to run on OpenIMU hardware.

ACEINNA Navigation Studio developer tools and GUI are found on our developer site: developers.aceinna.com

Full manual and API and Algorithm documentation is found at:

openimu.readthedocs.io

IDE and Compilation tools, download VS Code and Add ACEINNA Extension:

code.visualstudio.com