


# Photoelectrics Through-beam, Transistor Output Type PA12B.T20..

CARLO GAVAZZI



- Elevators, Escalators and Entrance control
- Range 20 m
- ESPE-Type 2, PL C.
- Modulated, infrared light
- Supply voltage: 10 to 30 VDC
- Output: 100 mA, NPN or PNP type
- Make or break switching
- Protection: reverse polarity, short circuit, transients
- Cable versions with or without connector
- Emitter mute and power adjustment
- High neighbour immunity, 3-codes
- CE, UL325 and UL508 approved

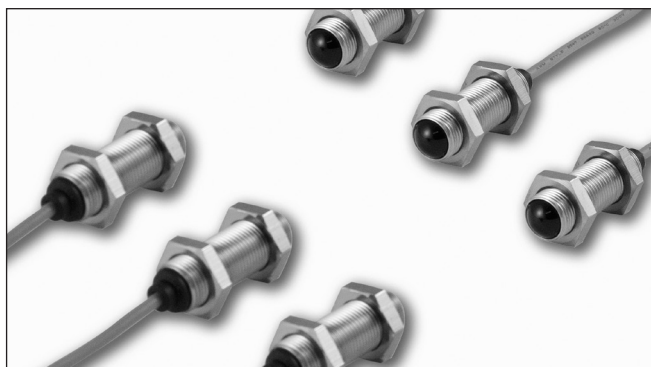

## Product Description

The PA12BNT. is a through beam sensor set specially designed for Elevators, Escalators, Entrance control to meet the requirements in the door market. The housing is very robust and is known for its high long term reliability mute. The emitter

has a mute input to turn it off for evaluation of the sensor function.

The emitter and receivers can be delivered in 3 different codes on order to improve neighbour immunity. Available in 10-30 VDC version.

## Ordering Key

**PA12B1T20NO-C2**

Type	_____
Housing style	_____
Housing size	_____
Housing material	_____
Sensor code	_____
Detection principle	_____
Sensing distance	_____
Output type	_____
Output configuration	_____
Connection type	_____
Cable connector	_____

## Type Selection

Housing diameter	Range S <sub>n</sub>	Con-nec-tor	Ordering no. Receiver NPN, NO	Ordering no. Receiver NPN, NC	Ordering no. Receiver PNP, NO	Ordering no. Receiver PNP, NC	Ordering no. Emitter
M12 mm Code 1	20 m	NO	PA12B1T20NO	PA12B1T20NC	PA12B1T20PO	PA12B1T20PC	PA12B1T20
M12 mm Code 2	20 m	NO	PA12B2T20NO	PA12B2T20NC	PA12B2T20PO	PA12B2T20PC	PA12B2T20
M12 mm Code 3	20 m	NO	PA12B3T20NO	PA12B3T20NC	PA12B3T20PO	PA12B3T20PC	PA12B3T20
M12 mm Code 1	20 m	YES	PA12B1T20NO-C2	PA12B1T20NC-C2	PA12B1T20PO-C2	PA12B1T20PC-C2	PA12B1T20-C2
M12 mm Code 2	20 m	YES	PA12B2T20NO-C2	PA12B2T20NC-C2	PA12B2T20PO-C2	PA12B2T20PC-C2	PA12B2T20-C2
M12 mm Code 3	20 m	YES	PA12B3T20NO-C2	PA12B3T20NC-C2	PA12B3T20PO-C2	PA12B3T20PC-C2	PA12B3T20-C2

Note: Please order emitter and receiver separately

## Specifications Emitter

Rated operational volt. (U <sub>B</sub> )	10 to 30 VDC	Light source	LED, 880 nm
Ripple (U <sub>rip</sub> )	≤ 10%	Light type	Infrared, modulated
Supply current	≤ 20 mA	Light spot	1580 mm @ 12 m
Protection	Reverse polarity, transients	Emitter angle	± 3.8° @ 12 m
Power ON delay (t <sub>v</sub> )	≤ 100 ms	Power adjustment	R <sub>x</sub> ~ 1.5 kΩ -10 kΩ
Control input			4...24 m in 19 steps
Normal oper.	> 1.5 VDC		
Mute	< 1.2 VDC		

## Specifications Receiver

<b>Rated operating dist. (S<sub>n</sub>)</b>	20 m	<b>Protection</b>	Short-circuit, reverse polarity, transients
<b>Blind zone</b>	None	<b>Utility category</b>	DC12 Control of resistive loads and solid state loads with optical insulation DC13 Control of electromagnets
<b>Temperature drift</b>	≤ 0.4%/°C	<b>Ambient light</b>	> 20.000 Lux (EN60947-5-2)
<b>Hysteresis (H)</b>	3 - 20%	<b>Detection angle</b>	± 2.9° @ 12 m
<b>Rated operational volt. (U<sub>B</sub>)</b>	10 to 30 VDC (ripple included)	<b>Operating frequency (f)</b>	30 Hz
<b>Ripple (U<sub>rrp</sub>)</b>	≤ 10%	<b>Response time</b>	OFF-ON (t <sub>ON</sub> ) ≈ 10 ms ON-OFF (t <sub>OFF</sub> ) ≈ 20 ms
<b>No load supply current (I<sub>o</sub>)</b>	≤ 13 mA	<b>Power ON delay (t<sub>v</sub>)</b>	≤ 300 ms
<b>Output current</b>		<b>Output function</b>	NPN or PNP Make or break (NO or NC)
Continuous (I <sub>a</sub> )	≤ 100 mA		
Short-time (I)	≤ 100 mA, (max. load capacity 100 nF)		
<b>Minimum operational current (I<sub>m</sub>)</b>	0.5 mA		
<b>OFF-state current (I<sub>r</sub>)</b>	≤ 100 μA		
<b>Voltage drop (U<sub>d</sub>)</b>	≤ 1.6 VDC @ 100 mA		

## General Specifications

<b>Environment</b>		<b>Electrical fast transients/burst</b> (EN 61000-4-4)	± 4 kV
Overvoltage category	III (IEC 60664/60664A, 60947-1)	<b>Surge</b> (EN 61000-4-5)	
Pollution degree	3 (IEC 60664/60664A, 60947-1)	Power-supply	> 1 kV (with 500 Ω)
Degree of protection	IP67 (IEC 60529; EN60947-1) 1, 2, 3, 4, 6, 12, 13 (NEMA types)	Sensor output	> 1 kV (with 500 Ω)
<b>Temperature</b>		<b>Wire conducted disturbances</b> (EN 61000-4-6)	> 10 Vrms
Operating	-20° to +50°C (-4° to +122°F)	<b>Power-frequency magnetic fields</b> (EN 61000-4-8)	
Storage	-25° to +80°C (-13° to +176°F)	Continuous	> 30 A/m, 38 μ tesla
<b>Rated insulation voltage</b>	50 VDC	Short-time	> 300 A/m, 380 μ tesla
<b>Dielectric test voltage</b>	500 Vac rms (EN60947-1)	<b>Vibration</b> (IEC 60068-2-6)	10 to 150 Hz, 1 mm / 15 g
<b>Rated impulse withstand test</b>	800 V (1.2 / 50 μs) (EN60947-1)	<b>Shock</b> (IEC 60068-2-27)	30 G / 11 ms, 3 pos, 3 neg per axis
<b>ESPE</b>	Type 2	<b>Free fall</b> (IEC 60068-2-31)	2 times from 1 m 100 times from 0.5 m
<b>PFH<sub>d</sub></b>	6 x 10 <sup>-8</sup> failure per hour (worst case SRP for CS)	<b>Pig-tail connector (-C2)</b>	3-pol micro MATE-N-LOK Series, AMP/TE
<b>Diagnostic coverage</b>	99 % (EN13849-1: 2008)	<b>Housing material</b>	
<b>Performance level</b>	C (EN13849-1: 2008)	Body	M12-Stainless Steel
<b>MTTF<sub>d</sub></b> (worst case full sensor)	345 Years (worst case full receiver) EN ISO 13849-1, SN 29500 412 Years (worst case full emitter) EN ISO 13849-1, SN 29500	Front	PC black
<b>Electrostatic discharge</b> (EN61000-4-2)		<b>Connection</b>	
Contact discharge	> 12 kV	Cable	PVC, Emitter: grey / Receiver: black, 5 m, 3 x 0.14 mm <sup>2</sup> , Ø 2.9 mm
Air discharge	> 8 kV	<b>Weight</b>	
<b>Radiated RF electromagnetic fields</b> (EN 61000-4-3)	> 10 V/m	Emitter	80 g
		Receiver	80 g
		<b>CE-marking</b>	EN12445, EN12453, EN12978, EN 60947-5-2
		<b>UL-Approval</b>	UL325 UL508, CSA-C22.2 No.247

## Operation Diagram

tv = Power ON delay

Power supply


Target emitter present

Object present


Break (NC) Output ON

Make (NO) Output ON

Mute active  $\leq 1.2$  VDC

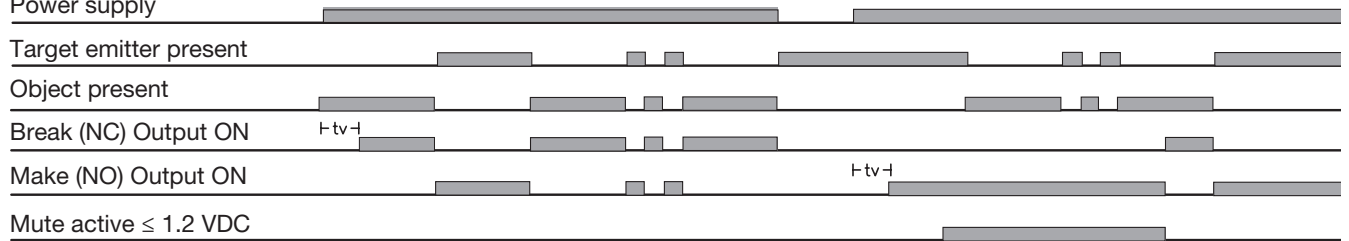


## Dimensions

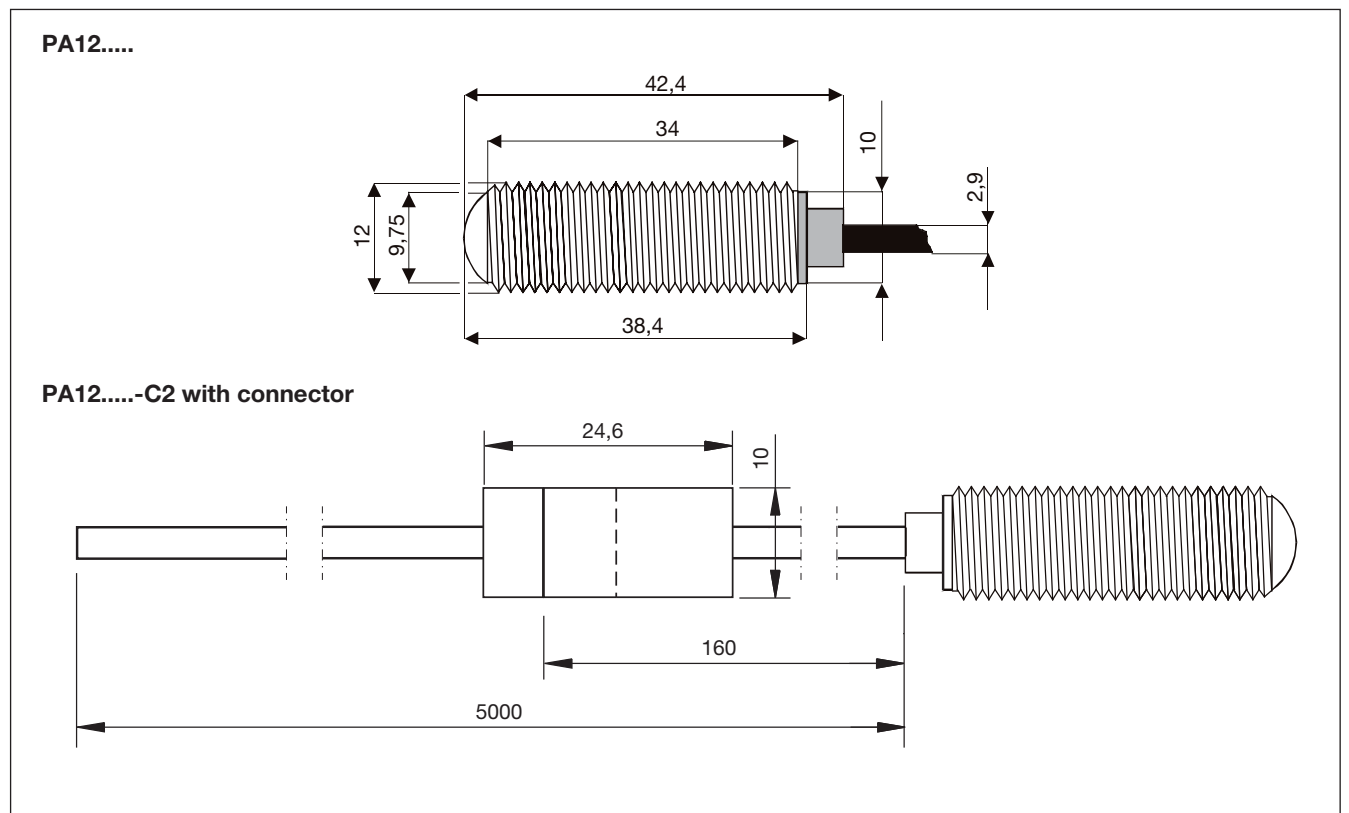





## Wiring Diagram

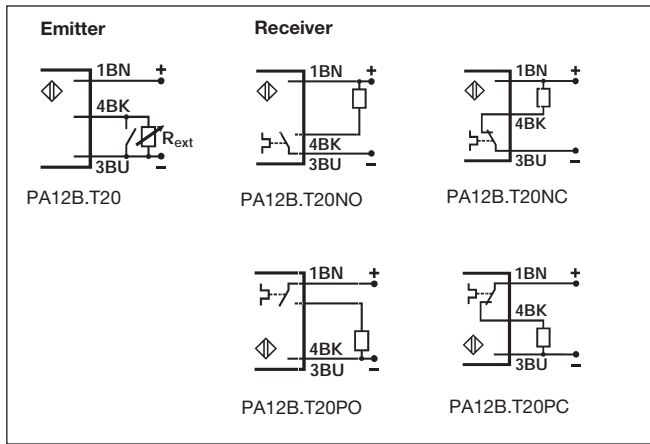


## Detection Diagram

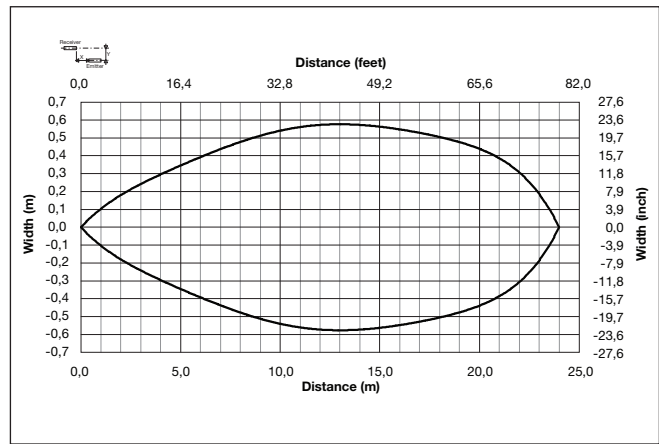

## Power adjustment curve

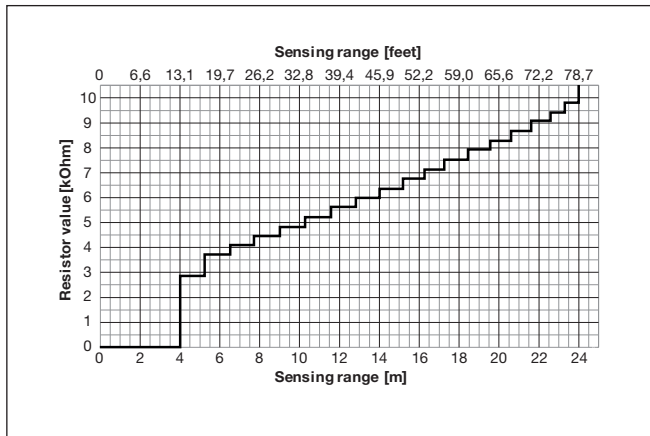

## Excess Gain

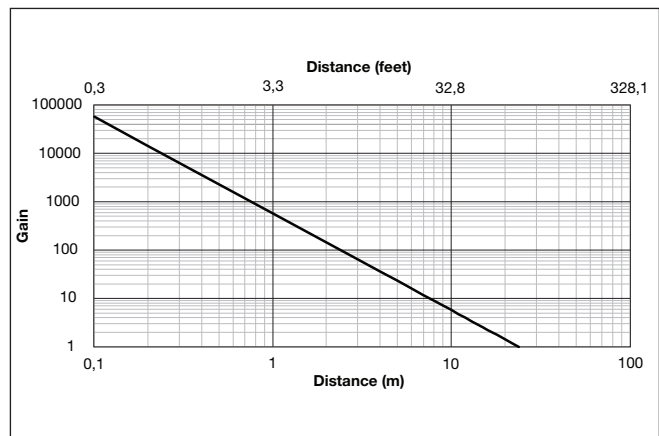

## Neighbour Immunity Diagram

