

SUMMARY

Wires

Triax 1



Image is for illustrative purpose only

Series 4A
Termination type Female solder
IP rating 61
AWG wire size 0.00 - 0.00
Cable Ø 0.00 - 0.00 mm
Status active
Matching parts [FFB.4A.675.CTCC16](#)

Download

[Request a quote](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

Shell Style/Model PCA*: Free receptacle with cable collet

Keying

Housing Material Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces

Weight 253.00 g

Performance

Configuration 4A.675 : 1 Triax (75 Ohm)

Insulator T: PTFE


Rated Current 6 Amps

Others

Endurance (Shell): 5000 mating cycles
Humidity (max): <=95% [at 60 deg C /140 F]
Climatical Category: 55/175/21
Salt Spray Corrosion: >1000 hr

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

DRAWINGS

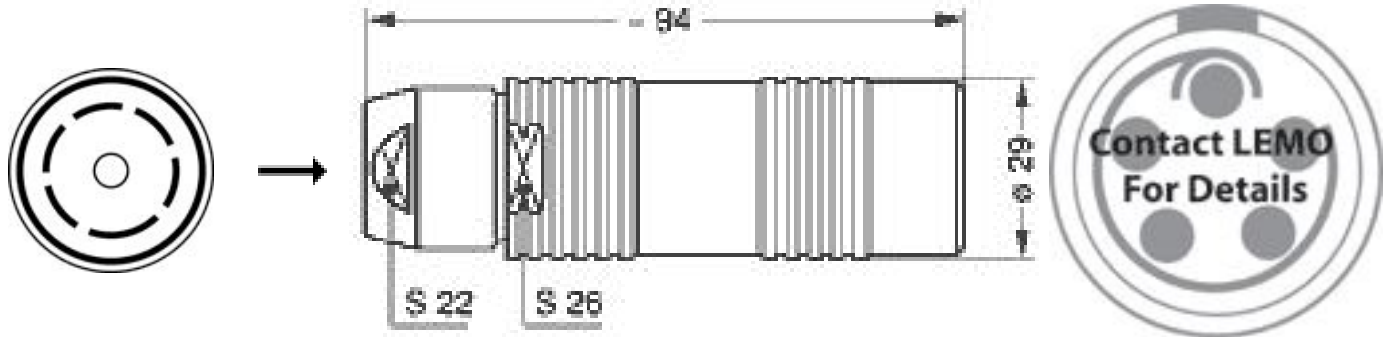

Dimensions

	A	L	S1	S2
mm.	29	94	26	22
in.	1,14	3,70	1,02	0,87

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.