

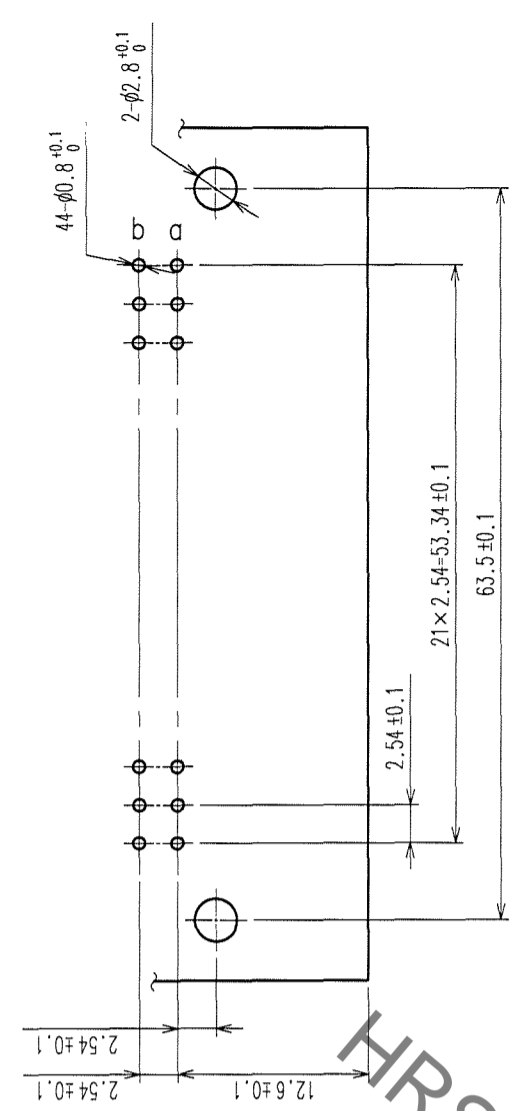
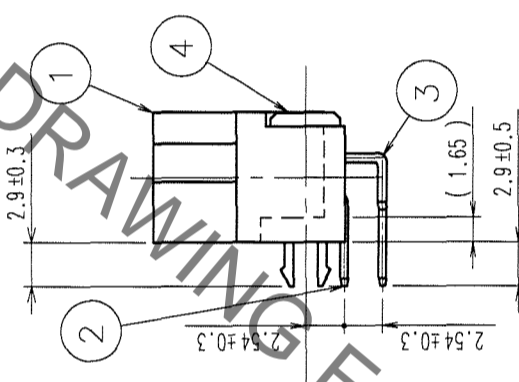
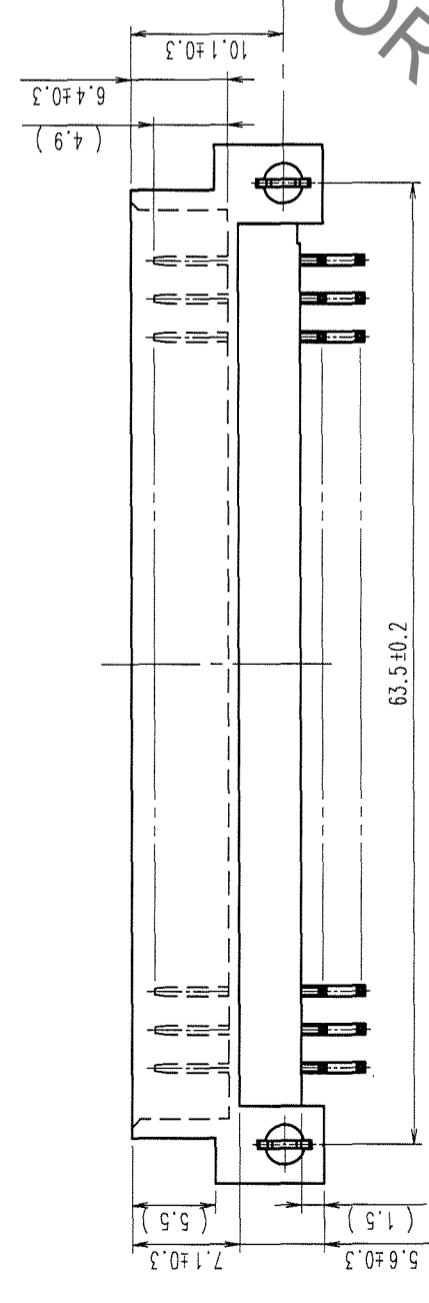
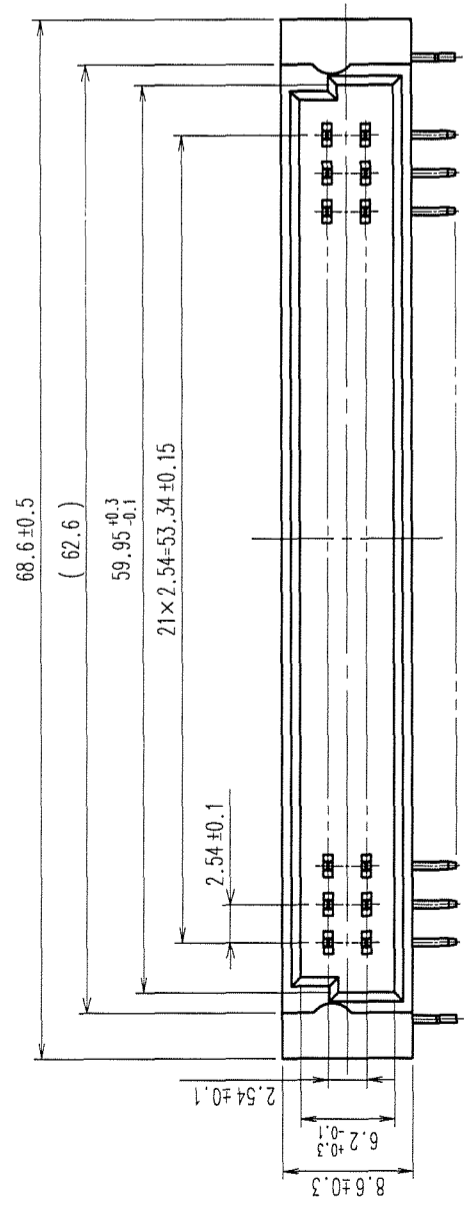


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
2 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

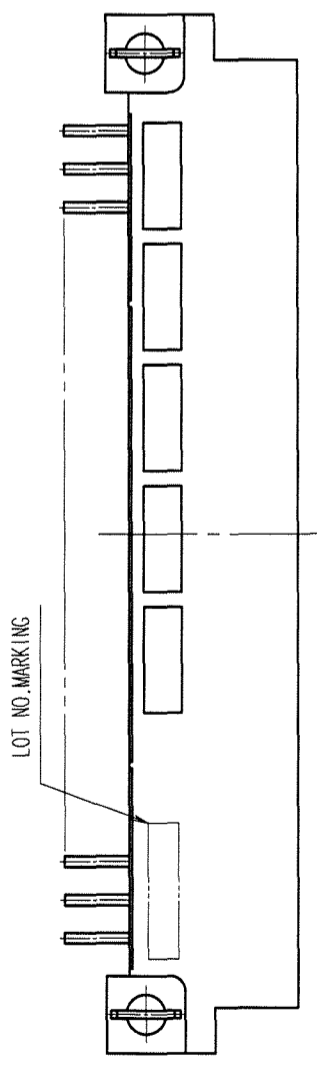

PECOMMENDED P.C.B HOLE PATTERN(t=1.6±0.1)

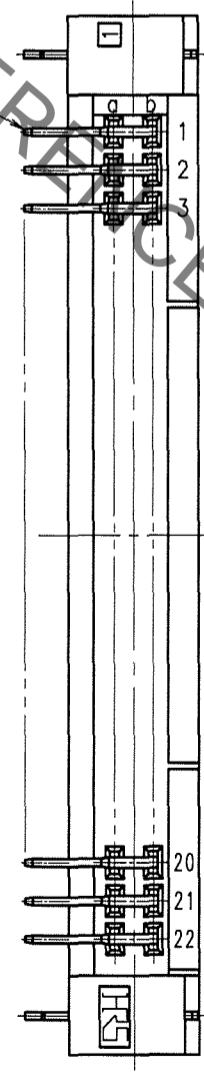

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

4	PHOSPHOR BRONZE	Ni1μm+Sn1μm
2,3	COPPER ALLOY	CONTACT AREA : Ni2.5μm+Au0.1μm DIP AREA : Ni2.5μm+Sn2μm
1	PBT	BEIGE, UL94V-0
NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN H.Saitou 05.12.06	CHECKED <i>S. Sawabe</i> 05.12.06	APPROVED <i>K. Hayama</i> 05.12.06	RELEASED
DRAWING NO. EDC3-019816-01	PART NO. PCN12EA-44P-2.54DS(71)			
SCALE 2:1	CODE NO. CL583-2032-6-71			
UNITS mm	HIROSE ELECTRIC CO., LTD			

TO
PCK