

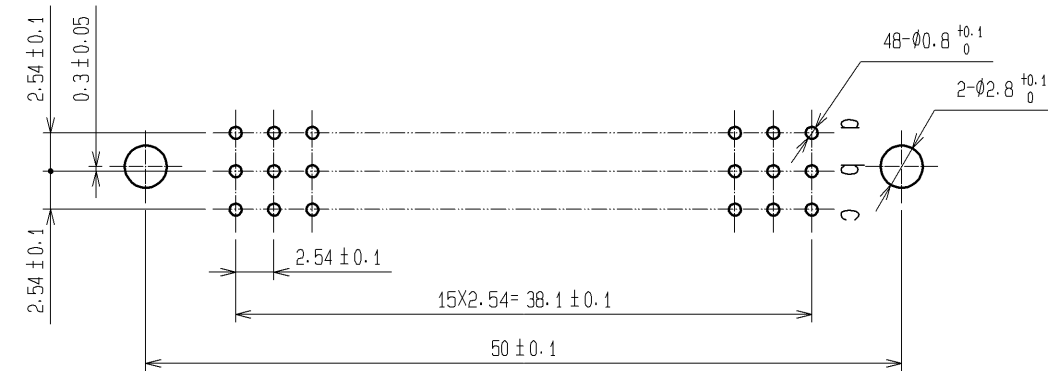
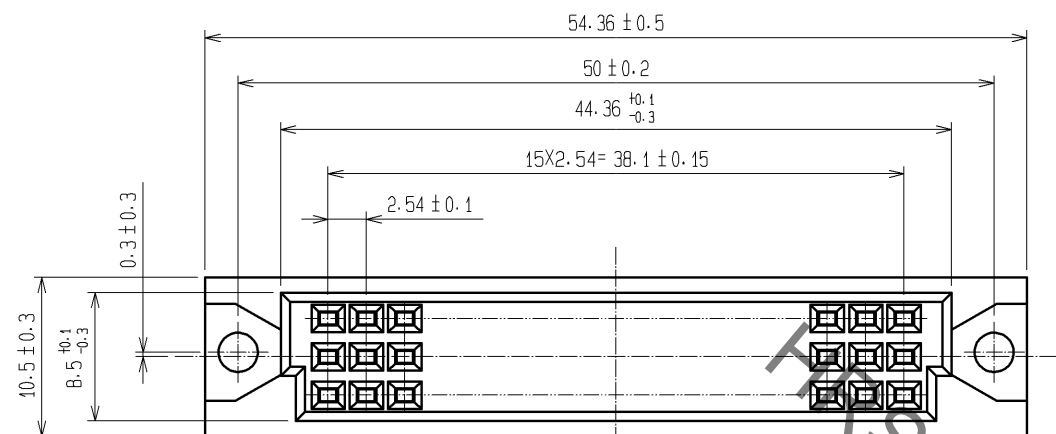
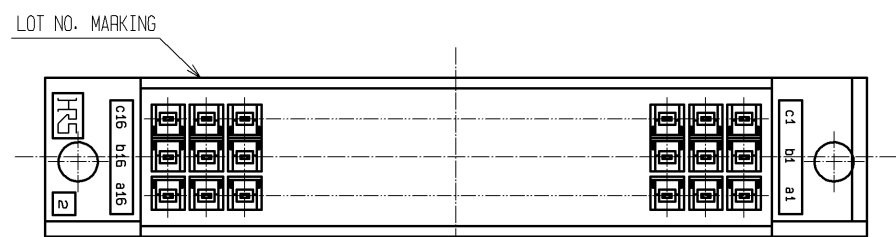


Jan.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

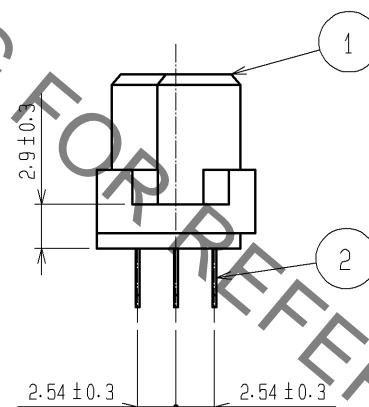

RECOMMENDED P.C.B. HOLE PATTERN (t=1.6 ± 0.1)

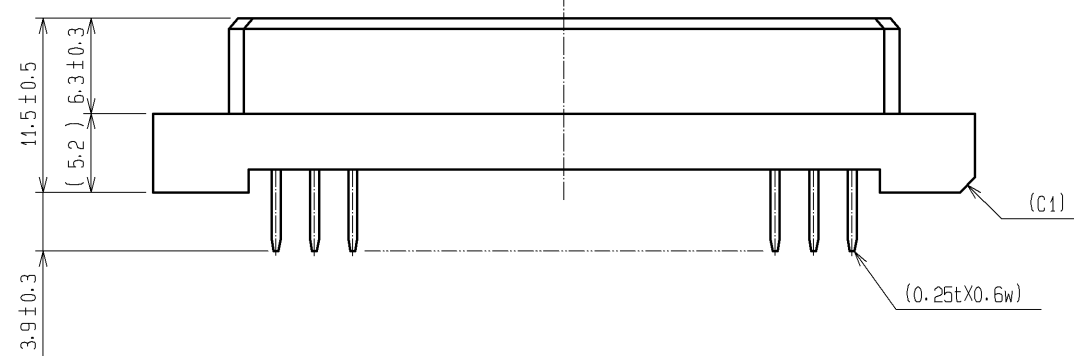

1	PBT	BEIGE	UL94V-0	2,3	COPPER ALLOY	CONTACT AREA: Ni1µm+Au0.1µm DIP AREA : Ni1µm+Sn2µm		
NO.	MATERIAL	FINISH.	REMARKS	NO.	MATERIAL	FINISH. REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA	08.02.20	DRAWING NO. EDC3-020601-01				
		CHECED : SI. TOMIOKA	08.02.19	PART NO. PCN13-48S-2.54DSA(71)				
		DESIGNED : NH. SUGITA	08.02.19	CODE NO. CL583-3010-9-71				
		DRAWN : NN. ONDA	08.02.19					