

# Photoelectrics Through-beam, Relay Output, Battery Powered Type PD180CBT30Q/MU

CARLO GAVAZZI



- Designed for industrial doors and gates
- ESPE type 2, Performance level C
- Range 15 m or 30 m
- Modulated, infrared light
- Supply voltage: 12 to 24 VAC/DC (receiver)
- Supply voltage: 2 x ER14505 3.6 VDC size AA Lithium batteries (emitter)
- SPST relay output
- SPST relay low battery
- LED for output indication
- Connection, terminal block
- Emitter test input
- CE (EN 12453, EN 12978) and UL325 approved




## Product Description

The PD180CBT30Q/MU sensor is developed specifically for the domestic and industrial door market. The sensor meets the regulations for industrial doors in Europe and North America. The robust polycarbonate housing allows flexible installation as the lenses are adjustable both in horizontal and vertical direction. The sensor is easy to use and no sensitivity adjustments are necessary. The aspherical lens design is superior to previous design of sensors with built-in parabolic reflectors that had corrosion and dust

problems.  
Increased safety by build-in:  
- Sensor test function; the emitter has a built-in test input designed to mute the emitter and thus evaluate the sensor function. Test function is to be activated by the door controller or the door function can be activated by a limit switch, magnet sensor or a safety edge profile. The receiver works with a power-supply from 12 to 24 VAC/DC and the emitter is designed to use 2 x ER14505 3.6 VDC size AA Lithium batteries.

## Ordering Key

PD180CBT30Q/MU

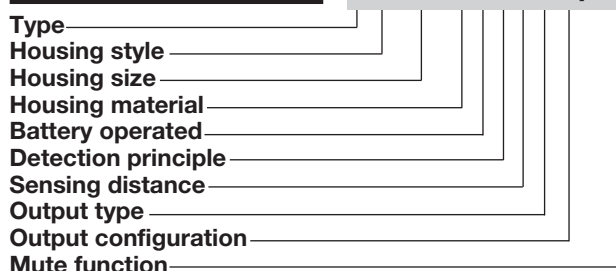

## Type Selection

Housing size	Range $S_n$	Ordering no. Emitter	Ordering no. Receiver
180 x 51 x 49 mm	30 m	PD180CBT30MU	PD180CBT30Q

## Specifications Emitter

<b>Rated operating dist (<math>S_n</math>)</b>	15 m with jumper not activated 30 m with jumper activated	<b>Mute input</b> Normal operation Mute	> 6 K $\Omega$ < 4 K $\Omega$
<b>Rated operational volt. (<math>U_o</math>)</b>	2 x ER14505 3.6 VDC size AA $\geq$ 2700 mAh Lithium batteries	<b>Light source</b>	LED, 850 nm
<b>Battery lifetime</b> Jumper not active Jumper active	15m => 2.5 years 30m => 1.5 years	<b>Light spot size</b> @ 15 m setting @ 30 m setting	1.2 m @ 7.5 m 2.4 m @ 15 m
<b>Supply current</b> With Mute active ( $I_o$ )	Typ. 29 $\mu$ A	<b>Light type</b>	Infrared, modulated
<b>Protection</b>	Reverse polarity, transients	<b>Optical angle</b>	$\pm$ 4.1 $^\circ$

## Specifications Receiver

<b>Rated operating dist. (S<sub>n</sub>)</b>	15 or 30 m dependent on emitter settings	<b>Ambient light</b>	
<b>Blind zone</b>	None	Incandescent light @ 3000 ... 3200 °K	≥ 100 000 lux (EN 60947-5-2)
<b>Temperature drift</b>	≤ 0.4%/°C	Incandescent light 3200 °K	≥ 10 000 lux* (EN 61496-2)
<b>Hysteresis (H)</b>	3 - 20%	Fluorescent light	≥ 3 000 lux* (EN 61496-2)
<b>Rated operational volt. (U<sub>e</sub>)</b>	Supply class 2 12 to 24 VDC, -15% +10% AC: 45 Hz - 65 Hz 12 to 24 VAC, -15% +10%	Stroboscopic light	0.05 J @ 200 Hz to 0.5 J @ 5 Hz* (EN 61496-2)
<b>Ripple (U<sub>rrp</sub>)</b>	≤ 10%	Flashing beacon light	3 to 5 J @ 0.5 to 2 Hz* (EN 61496-2)
<b>Output</b>		<b>Optical angle</b>	± 4.7°
Contact ratings	AgPd-Au	<b>Protection</b>	Reverse polarity, transients
Resistive loads	AC 1 0.5 A/30 VAC DC 1 1 A/30 VDC	<b>Operating frequency (f)</b>	25 Hz
Mechanical life (typical)	≥ 10 000 000 cycles	<b>Response time</b>	OFF-ON (t <sub>ON</sub> ) ≤ 20 ms ON-OFF (t <sub>OFF</sub> ) ≤ 20 ms
Lifetime contacts (typical)		<b>Power ON delay (t<sub>v</sub>)</b>	≤ 300 ms
	AC 1 0.5 A/30 VAC 100 000 DC 1 1 A/30 VDC 100 000	<b>Indication function</b>	
Minimum load power	1 mW	Power ON	LED, green
<b>No load supply current (I<sub>o</sub>)</b>	≤ 36 mA DC (relay ON)	Output ON	LED, yellow
+ Battery low alarm	≤ 55 mA DC (both relays ON)		

\* Failure to danger (worst case alignment)

## General Specifications

<b>Environment</b>		<b>Weight</b>	
Overvoltage category	III (IEC 60664/EN 60947-1)	Emitter	270 g
Pollution degree	3 (IEC 60664/EN 60947-1)	Receiver	230 g
Degree of protection	IP 55 (IEC 60529; 60947-1)	<b>UL-Approval</b>	cURus UL325, CSA-C22.2 No.247
<b>Temperature</b>		<b>CE-marking</b>	Yes EN 12453, EN 12978, EN 61496-1, Type 2 ESPE Sensor designed according to EN 60947-5-2
Operating	-25° to +55°C (-13° to +131°F)	General reference	110 years @ 40°C (+104°F) (EN ISO 13849-1 (Parts count method, annex D.1), SN 29500)
Storage	-25° to +80°C (-13° to +176°F)	MTTFd related to combined product life time (Rx+Tx)	2 (EN ISO 13849-1) C (EN ISO 13849-1) 1.04 x 10 <sup>-6</sup> Errors per hour (EN ISO 13849-1) 20 years (EN ISO 13849-1)
<b>Vibration</b>	10 to 150 Hz, 0.5 mm/7.5 g (EN 60068-2-6)	ESPE architecture (Cat.)	
<b>Drop test</b>	2 x 1 m & 100 x 0.5 m (IEC 60068-2-31)	Performance level (PL.)	
<b>Lens adjustment</b>		PFHd	
Adjustable optics	Horizontal 200° Vertical ±30°	Mission Time	
<b>Rated insulation voltage</b>	50 VDC		
<b>Housing material</b>			
Front	PC black		
Backpart	PC black		
<b>Connection</b>			
Emitter	2 pole terminal block		
	Receiver 6 pole terminal block		

## Operation Description

- The sensor shall be mounted with the draining hole facing down.
- The cable must be mounted pointing downwards to avoid water entering the sensor (See Dimensions).
- This product can only be used to detect direct interruption between Tx and Rx; it must not be reflected
- The sensors must be mounted on a hard vibration-free surface
- In order to obtain an “ESPE type 2” safety device, the sensors must be connected to a control system fitted with “Photo test” or similar sensor verification function.

## Operation Diagram

tv = Power ON delay

Emitter supply

Power supply (receiver)


Target emitter present

Object present


Mute active < 4 kΩ

Make (NO) Output ON


Output Battery

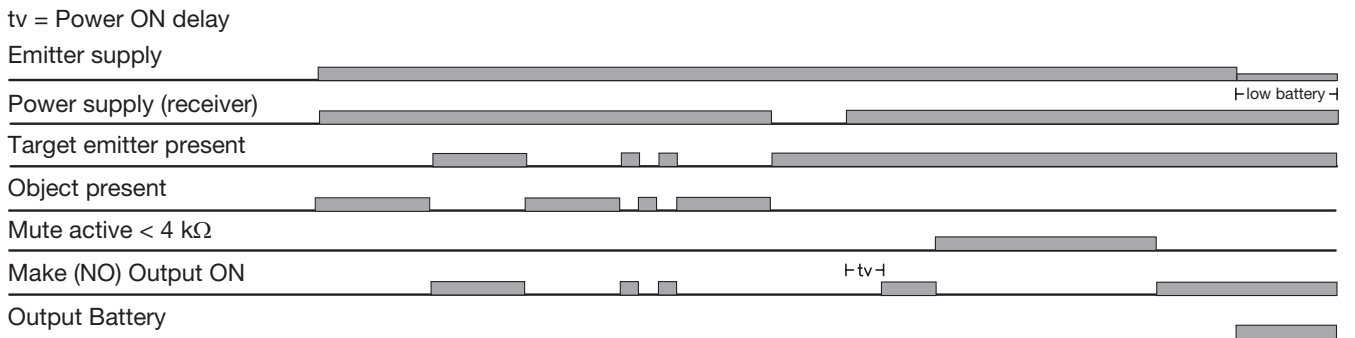

## Dimensions

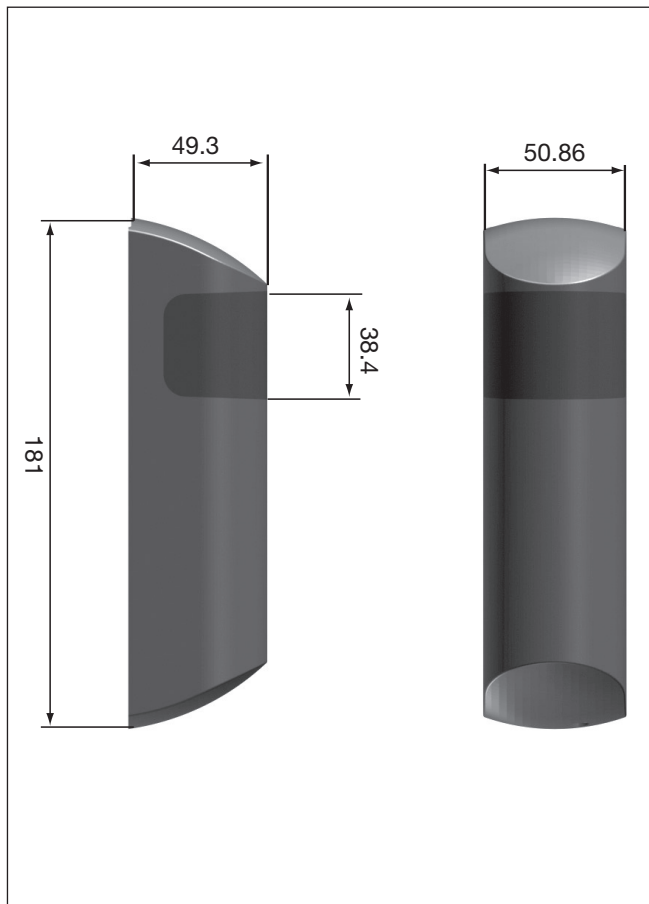

## Detection Diagram

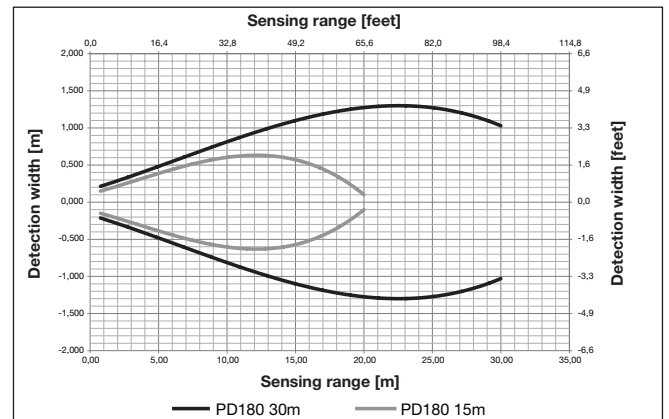

## Excess Gain

