



## Features

- Low torque
- Carbon element
- Plain or knurled shaft option
- Metal bushing
- Metal shaft
- Rear solder lugs
- Audio or linear taper options



- Variety of resistance values
- RoHS compliant\*

## PDB241-GTR Series - 24 mm Guitar Potentiometer

### Electrical Characteristics

Taper.....Audio, linear  
 Standard Resistance .....10K to 1M ohms  
 Standard Resistance Tolerance.....±20 %


### Environmental Characteristics

Operating Temperature .....-10 °C to +70 °C  
 Power Rating .....0.25 watt  
 Maximum Operating Voltage .....250 V  
 Rotational Noise .....150 mV max.

### Mechanical Characteristics

Mechanical Angle .....300 ° ±5 °  
 Rotational Torque .....10 to 45 g-cm  
 Stop Strength.....8 kg-cm min.  
 Rotational Life.....15,000 cycles min.  
 Soldering Condition  
 Manual Soldering .....300 °C within 3 seconds  
 Wave Soldering .....260 °C within 3 seconds  
 Hardware .....Two flat washers and two mounting nuts supplied per potentiometer

### Derating Curve



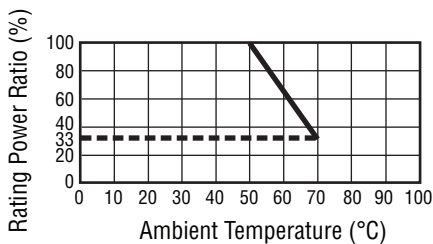


### Standard Resistance Table


Resistance (Ohms)	Resistance Code
10,000	103
25,000	253
50,000	503
100,000	104
250,000	254
300,000	304
500,000	504
1,000,000	105

### Product Dimensions



#### PDB241-GTR01

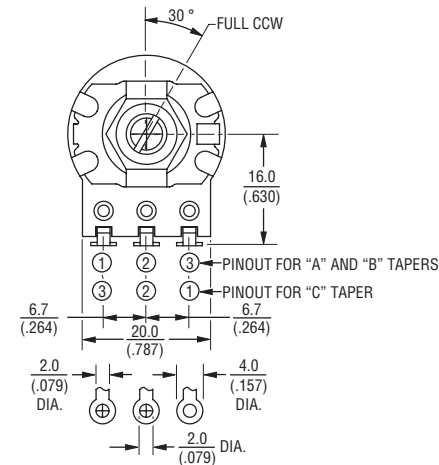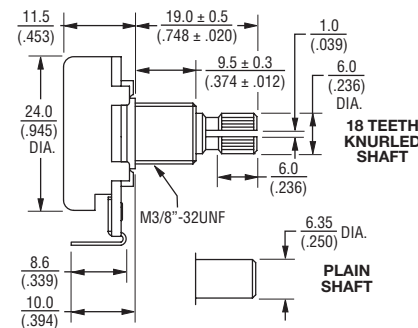

### Circuit



#### PDB241-GTR03

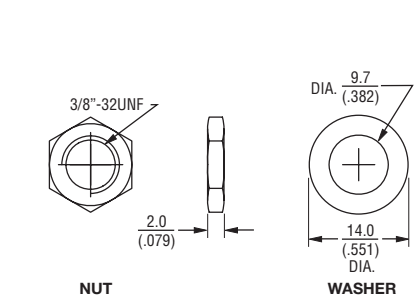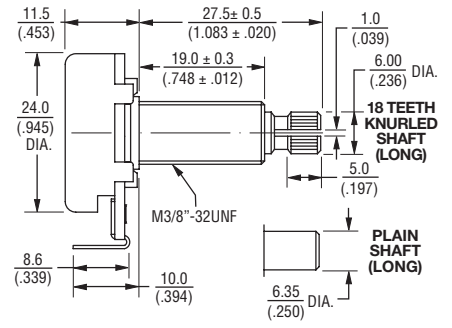

TOLERANCES:  
 UNDER 10.0 = ±0.3 / (.394) = (±.012)    10.0 ~ 100 = ±0.5 / (.394 - 3.937) = (±.020)

DIMENSIONS:    MM / (INCHES)

### How To Order

#### PDB24 1 - GTR 01 - 504 A2

Model \_\_\_\_\_  
 Number of Units \_\_\_\_\_  
 1 = Single  
 Guitar Pot Designator \_\_\_\_\_  
 Configuration \_\_\_\_\_  
 01 = Knurled Shaft / Solder Lugs  
 02 = Plain Shaft / Solder Lugs  
 03 = Knurled Shaft (Long) / Solder Lugs  
 04 = Plain Shaft (Long) / Solder Lugs  
 Resistance Code (See Table) \_\_\_\_\_  
 Resistance Taper (See Taper Charts) \_\_\_\_\_



**WARNING Cancer and Reproductive Harm**  
[www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

\*RoHS Directive 2015/863, Mar 31, 2015 and Annex.  
 Specifications are subject to change without notice.




Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

# PDB241-GTR Series - 24 mm Guitar Potentiometer

**BOURNS®**

## Taper Charts

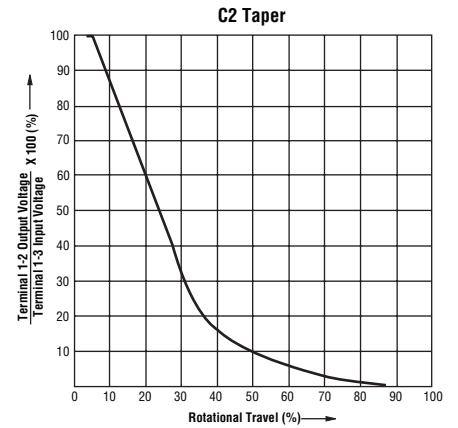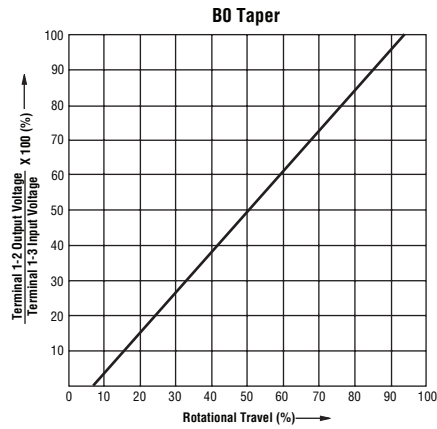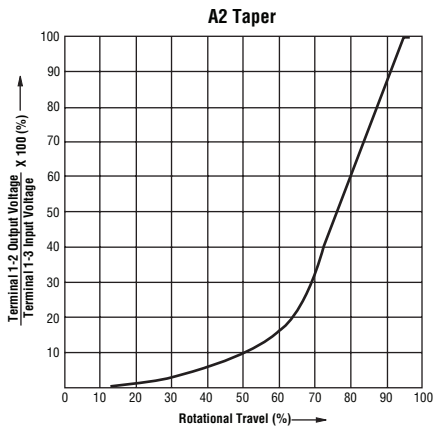

Other tapers available.

REV. 05/20

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).