



# PE1605C4A6-AU

## ULTRA LOW CAPACITANCE ESD PROTECTION

**Voltage**

**5 V**



### Features

- IEC61000-4-2(ESD): ±20kV Air, ±15kV Contact
- IEC61000-4-4(EFT): 40A(5/50ns)
- IEC61000-4-5(Lightning): 4A(8/20uS)
- Low clamping voltage
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard
- AEC-Q101 qualified

### Mechanical Data

- Case: Molded plastic, SOT-23 6L
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0005 ounces, 0.014 grams

SOT-23 6L

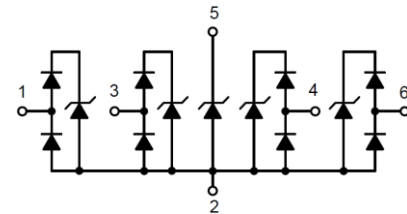

## Maximum Ratings and Thermal Characteristics (T<sub>A</sub> = 25 °C unless otherwise noted)

PARAMETER	SYMBOL	LIMIT	UNITS
ESD IEC61000-4-2(Air)	V <sub>ESD</sub>	±20	kV
ESD IEC61000-4-2(Contact)		±15	
Operating Junction Temperature Range	T <sub>J</sub>	-55~150	°C
Storage Temperature Range	T <sub>STG</sub>	-55~150	°C



## PE1605C4A6-AU

### Electrical Characteristics ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Reverse Stand-Off Voltage	$V_{RWM}^{(1)}$	-	-	-	5.5	V
Reverse Breakdown Voltage	$V_{BR}$	$I_{BR} = 1\text{ mA}$ , any I/O pins to GND	6	6.9	-	V
Reverse Leakage Current	$I_R$	$V_R = 5\text{ V}$	-	-	1	$\mu\text{A}$
Clamping Voltage	$V_{CL}$	$I_{PP} = 1\text{ A}$ , $t_P = 8/20\text{ }\mu\text{s}$ , any I/O pins to GND	-	-	10	V
		$I_{PP} = 4\text{ A}$ , $t_P = 8/20\text{ }\mu\text{s}$ , any I/O pins to GND	-	-	15	
Clamping Voltage TLP	$V_{CL}^{(2)}$	$I_{PP} = 8\text{ A}$ , $t_P = 100\text{ ns}$ , any I/O pins to GND	-	16	-	V
		$I_{PP} = 16\text{ A}$ , $t_P = 100\text{ ns}$ , any I/O pins to GND	-	23.5	-	
Dynamic Resistance	$R_{DYN}$	$t_P = 100\text{ ns}$	-	0.94	-	$\Omega$
Off State Junction Capacitance	$C_J$	0Vdc Bias $f = 1\text{ MHz}$ , Between any I/O pins to GND	-	-	0.6	pF
		0Vdc Bias $f = 1\text{ MHz}$ , Between any I/O pins	-	-	0.3	

**NOTES:**

1. A transient suppressor is selected according to the working peak reverse voltage( $V_{RWM}$ ), which should be equal to or greater than the DC or continuous peak operation voltage level.
2. Testing using Transmission Line Pulse (TLP) conditions:  $Z_0 = 50\Omega$ ,  $t_P = 100\text{ ns}$ .



# PE1605C4A6-AU

## TYPICAL CHARACTERISTIC CURVES

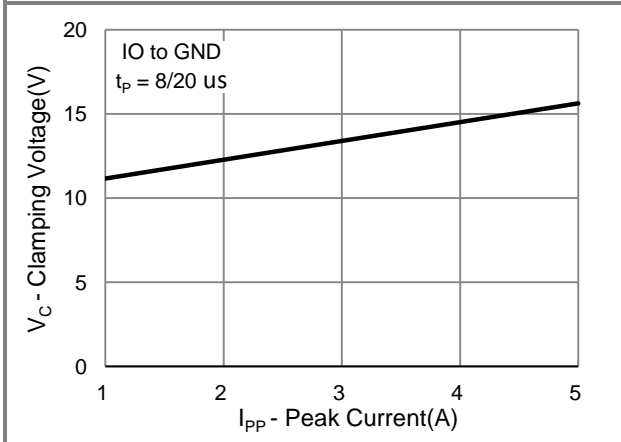


Fig.1 Typical Peak Clamping Voltage

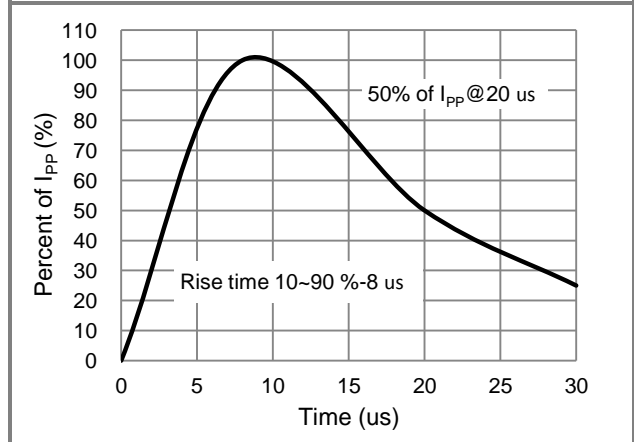


Fig.2 Pulse Waveform

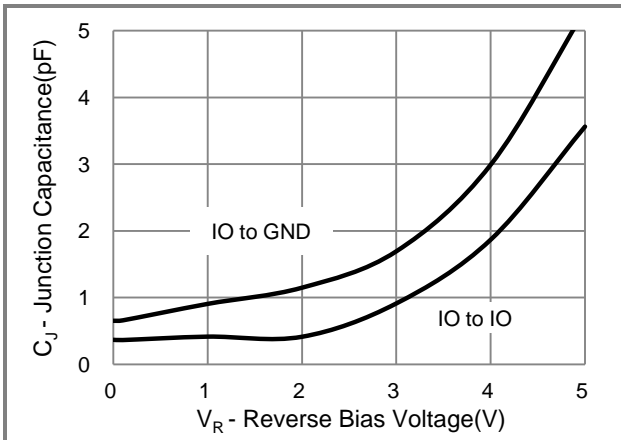


Fig.3 Typical Junction Capacitance

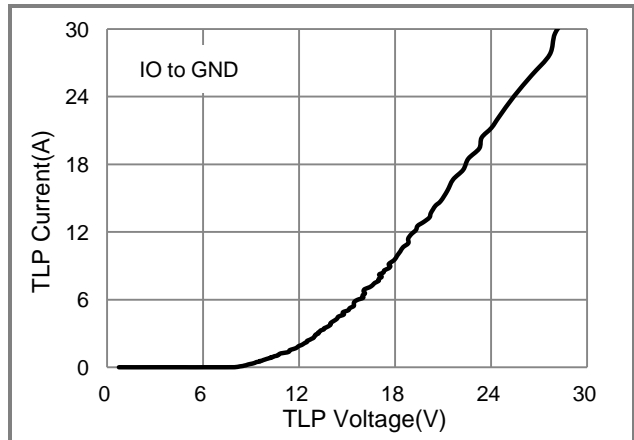


Fig.4 TLP Measurement



# PE1605C4A6-AU

## Part No Packing Code Version

Part No Packing Code	Package Type	Packing Type	Marking	Version
PE1605C4A6-AU_R1_000A1	SOT-23 6L	3K / 7" Reel	KCC	Halogen Free

## Packaging Information & Mounting Pad Layout

